



**INTERNATIONAL CIVIL AVIATION ORGANIZATION WACAF AND ESAF  
REGIONAL OFFICES**

**AFI PLANNING AND IMPLEMENTATION REGIONAL GROUP APIRG**

**AIRPORT COLLABORATIVE DECISION MAKING (A-CDM) IMPLEMENTATION  
GUIDE FOR AFI REGION**

[FIRST EDITION – JULY, 2024]

This Guidance Material is approved by the APIRG and published by ICAO's  
WACAF and ESAF Regional Offices

## TABLE OF CONTENTS

FOREWORD.....	iii
RECORD OF AMENDMENTS .....	iv
ABBREVIATIONS AND ACRONYMS .....	v
1. Chapter 1: Introduction.....	1
1.1 Background.....	1
1.2 Scope.....	2
2. Chapter 2: A-CDM Implementation guidance.....	4
2.1 Overview of A-CDM .....	4
2.2 A-CDM Project Phases .....	5
2.3 Key Considerations for A-CDM Implementation Phase.....	6
2.4 Stakeholder Access to A-CDM Data.....	8
2.5 Achieving an Effective and Efficient Turnaround Process .....	9
2.6 Building a Continuous Improvement Culture .....	10
2.7 Measure Effectiveness of A-CDM Implementation.....	10
3. Chapter 3: Harmonization Framework .....	14
3.1 A-CDM Terminologies (vocabulary) and Definitions .....	14
3.2 Roles and Responsibilities of A-CDM stakeholders .....	18
3.3 Standardization of A-CDM Procedures .....	19
3.4 Target off Block Time (TOBT) and Target Start-up Approval Times (TSAT).....	20
3.5 Sharing of TOBT and TSAT .....	21
3.6 A-CDM Start-up Procedures.....	21
3.7 Milestone Approach .....	21
3.8 A-CDM Performance Indicators .....	29
4. Chapter 4 - Interoperability of A-CDM with other systems .....	32
4.1 Interactions between A-CDM and Other Systems .....	32
4.2 Project Framework for A-CDM Integration/Interoperation with ATFM Systems .....	33
5. Chapter 5 - Training.....	36
5.1 Who.....	36
5.2 What.....	36
5.3 When.....	36
5.4 How.....	36
5.5 Continuance .....	37
Appendix A – Relationships between A-CDM and ASBU Modules.....	A1
Appendix B – Use Cases for Interoperability of A-CDM with Other Systems.....	B1
Appendix C - References .....	C1
Appendix D – GANP 6 <sup>th</sup> Edition A-CDM-B0/1.....	D1
Appendix E – Feeder Airports concept.....	E1
Appendix F - Generic MoU between partners and A-CDM stakeholders.....	F1

## FOREWORD

The *AFI A-CDM Implementation Guide* is published by WACAF and ESAF Secretariat on behalf of the accredited States and International Organisations involved. This document has been developed in accordance with the objectives of the Global Air Navigation Plan (GANP), 6<sup>th</sup> Edition and the outcomes of consultation with States and International Organisations.

In order to ensure harmonization and reduce duplication of efforts, this document was prepared based on the ICAO's ESAT and WACAF A-CDM Implementation Plan.

The approval for this document and its future versions is WACAF and ESAF regional offices [to be defined, ACDM Taskforce]. WACAF and ESAF regional offices Secretariat will publish, on behalf of the States and International Organisations involved, revised versions of the plan as may be required to reflect current implementation activities.

Copies of the plan may be obtained from:

<p><b>WACAF REGIONAL OFFICE</b></p>
-------------------------------------

<p><b>ESAF REGIONAL OFFICE</b></p>
------------------------------------

Subsequent amendments and/or corrigenda will be shown in the amendment and corrigendum record table.

The publication of amendments and corrigenda is announced regularly via letters to the States and International Organisations, as well as on the ICAO website, which should be consulted by those using this publication. Blank boxes facilitate annotations.

## RECORD OF AMENDMENTS

[illegible]

## ABBREVIATIONS AND ACRONYMS

ACARS	Aircraft Communications Addressing and Reporting System
A-CDM	Airport Collaborative Decision Making
ACGT	Actual Commence of Ground Handling Time
ACISP	A-CDM Information Sharing Platform
AEGT	Actual End of Ground Handling Time
AFTN	Aeronautical Fixed Telecommunication Network
AGHT	Actual Ground Handling Time
AIBT	Actual In-Block Time
AIC	Aeronautical Information Circular
AIDX	Aviation Information Data Exchange
AIP	Aeronautical Information Publication
AIRM	ATM Information Reference Model
AIXM	Aeronautical Information Exchange Model
ALDT	Actual Landing Time
AMAN	Arrival Manager
AMHS	ATS Messaging System
AMQP	Advanced Message Queuing Protocol
ANP	Air Navigation Plan
ANSP	Air Navigation Service Provider
AO	Aircraft Operator
AOBT	Actual Off-Block Time
AODB	Airport Operational Database
AOM	Airspace Organization and Management
AOP	Airport Operations Planning
APOC	Airport Operations Centre
API	Application Programming Interface
APIRG	AFI Regional Planning and Implementation Group
ARDT	Actual Ready Time
ARZT	Actual Ready for De-icing Time
ASAT	Actual Start-up Approval Time
ASBT	Actual Start Boarding Time

ASCII	American Standard Code for Information Interchange
A-SMGCS	Advanced-Surface Movement Guidance and Control System
ASRT	Actual start-up request time
ATC	Air Traffic Control
ATCO	Air Traffic Controller
ATFM	Air Traffic Flow Management
ATFMU	Air Traffic Flow Management Unit
ATM	Air Traffic Management
ATOT	Actual Take-Off Time
ATS	Air Traffic Services
ATTT	Actual Turnaround Time
AXIT	Actual Taxi-In Time
AXOT	Actual Taxi-Out Time
CAR	ICAO Central America & Caribbean Air Navigation Region
CDM	Collaborative Decision Making
CHG	Modification Message
CONOPS	Concept of Operations
CTOT	Calculated Take Off Time
DATM	Digital ATM
DCB	Demand and Capacity Balancing
DCL	Datalink Departure Clearance
DMAN	Departure Manager
DLA	Delay Message
eANP	Electronic Air Navigation Plan
ECZT	Estimated Commencement of De-Icing Time
EDIT	Estimated De-icing Time
EET	Estimated Elapsed Time
EEZT	Estimated End of De-Icing Time
EIBT	Estimated In-Block Time
ELDT	Estimated Landing Time
EOBT	Estimated Off Block Time
ERZT	Estimated Ready for De-icing Time

ETA	Estimated Time of Arrival
ETOT	Estimated Take-Off Time
ETTT	Estimated Turnaround Time
EXIT	Estimated Taxi-In Time
EXOT	Estimated Taxi-Out Time
FDPS	Flight Data Processing System
FF-ICE	Flight and Flow Information for the Collaborative Environment
FIR	Flight Information Region
FIXM	Flight Information Exchange Model
GDP	Ground Delay Program
GHA	Ground Handling Agent
HMI	Human Machine Interface
IATA	International Air Transport Association
ICAO	International Civil Aviation Organization
ICD	Interface Control Document
ICT	Information and Communication Technology
IP	Internet Protocol
KPI	Key Performance Indicator
MTF	Major Traffic Flow
MTTT	Minimum Turnaround Time
NOPS	Network Operations
OCC	Operations Control Center
PDS	Pre Departure Sequencing
RMS	Resource Management System
SESAR	Single European Sky ATM Research
SIBT	Schedule In-Block Time
SLA	Service Level Agreement
SMAN	Surface Manager
SOBT	Scheduled Off-Block Time
SQL	Structured Query Language
STD	Scheduled Time of Departure
SWIM	System Wide Information Management
TLDT	Target Landing Time



TMA	Terminal Control Area
TOBT	Target Off-Block Time
TSAT	Target Start-up Approval Time
TTOT	Target Take-Off Time
UML	Unified Modelling Language
VDGS	Visual Docking Guidance System
VTT	Variable taxi time
W3C	World Wide Web Consortium
XML	extensible Mark-up Language

## 1. Chapter 1: Introduction

### 1.1 Background

1.1.1 ICAO global vision is to achieve the sustainable growth of the global civil aviation system. To reach this vision, it has defined a certain number of strategic objectives among which are:

- **Air Navigation Capacity and Efficiency:** Increase the capacity and improve the efficiency of the global civil aviation system. Although functionally and organizationally interdependent with Safety, this Strategic Objective is focused primarily on upgrading the air navigation and aerodrome infrastructure and developing new procedures to optimize aviation system performance. The Global Air Navigation Capacity and Efficiency Plan (Global Plan) outlines the key activities for the triennium.
- **Environmental Protection:** Minimize the adverse environmental effects of civil aviation activities. This Strategic Objective fosters ICAO's leadership in all aviation-related environmental activities and is consistent with the ICAO and UN system environmental protection policies and practices.

1.1.2 The Global Air Navigation Plan (Doc 9750), together with its Editions, is the ICAO's highest air navigation strategic document and the plan to drive the evolution of the global air navigation system, in line with the Global Air Traffic Management Operational Concept (GATMOC, Doc 9854) and the Manual on Air Traffic Management System Requirements (Doc 9882). Developed in collaboration with and for the benefit of stakeholders, the GANP is a key contributor to the achievement of ICAO's Strategic Objectives and has an important role to play in supporting the United Nations 2030 Agenda for Sustainable Development.

1.1.3 The GANP and its vision are aimed at supporting the evolution of the air navigation system and ensuring that no country or stakeholder is left behind. The GANP provides a path to the safe, orderly and efficient evolution through the Basic Building Blocks (BBB) and Aviation System Block Upgrade (ASBU) frameworks.

1.1.4 For IATA, the growth potential in Africa is enormous, but change is necessary. Indeed, looking ahead, I estimate that over the next 20 years the sector will grow at around 3.3% per year. This is significantly lower than the growth observed between 2010 and 2019. However, the industry: ANSPs, Aerodrome Operators, Airlines, Handling etc have to continue to improve their operations in order to ensure economy, efficiency and sustainable aviation. A harmonized implementation of the A-CDM in the AFI region will be an enabler to achieve these strategic objectives of ICAO.

1.1.5 Due to the fact that infrastructure bottlenecks at airports will not be solved on the short term, it's important to operate as efficiently as possible with the current facilities. The efficiency of the Air Transport System in the AFI Region depends highly on traffic management enabler such as ACDM, ATFM (NOPS), F-FICE etc

1.1.6 The traffic growth vis-a-vis airport infrastructure has prompted ICAO to devise various methods, like promulgation of new procedures, regulations, sharing of information and collaborative approach in all fields to mitigate the issues being faced by the aviation community.

1.1.7 In light of events such as the World Pandemic of COVID-19 in 2019, the aviation industry had been strongly impacted. Most Stakeholders advocate for a collaborative approach in focusing efforts

that could help the interested parties to learn and understand different initiatives and their impacts, to ensure an orderly and harmonized reactivation. Although the traffic levels are not the usual ones, it is expected that as air operations are resumed, some elements of A-CDM could benefit the orderly recovery.

1.1.8 A-CDM has globally being identified as a way to unlock latent or unused capacity in the airport by means of increasing situation awareness to all the involved stakeholders thru sharing of information that leads to a better collaborative decision-making process, especially during the turnaround process in the airport. It has also been identified as a way to better recuperate from irregular operations, including natural disasters, technological disruptions, among others.

1.1.9 A-CDM is part of the ICAO's Global Air Navigation Plan's Aviation (GANP) System Block Upgrades (ASBU) methodology and it proposes to increase airport capacity in congested aerodromes by establishing a plan to implement B0-ACDM and subsequently selected elements of B1, B2 & B3 (as needed).

1.1.10 The ICAO WACAF and ESAF Regional Offices have been conducting several activities in the Region since 2015 to raise awareness and deliver know-how on the Airport Collaborative Decision-Making process. The main issues observed by the participants during these activities were those in which the implementation and / or processes procedures being followed are not harmonized wherein the possibility of creating confusion amongst the existing users, particularly aircraft operators, Air Traffic Control (ATC), Air Traffic Flow Management units (ATFM, where available), airport operators and Ground Handling Agents (GHA).

1.1.11 This document proposes to address this matter. It is developed by experts nominated by States, International Organizations (CANSO, ACI, IATA, and EUROCONTROL) in order to foster a harmonized implementation within the AFI region.

## **1.2 Scope**

1.2.1 This guide is intended to cover the basics for the harmonized implementation of B0/1ACDM "Airport CDM Information Sharing" in order to accomplish its main purpose of generate common situational awareness, which will foster improved decision making within aerodromes, by sharing relevant surface operations data among the local stakeholders involved in aerodrome operations.

1.2.2 The document, along with other activities such as the creation of a community or working group to generate discussions on the matter, seeks to enable new capabilities in which Stakeholders will be able to collaborate and take actions towards the achievement of a set of defined milestones, by being aware of the status of an individual flight measured against known target times and milestones.

1.2.3 In future editions, this document may evolve and include guidance for the implementation of B0/2-Integration with ATM Network function and subsequent B1, B2 & B3 when available. This is why it's important for stakeholders, especially airport operators, to consider the need for their processes and systems to have the capability to integrate to the ATM network, including national or regional ATFM services.

1.2.6 A complete gap analysis and Cost benefit analysis are good tools to identify the need to implement. This is especially true for airports that may not qualify to prescriptive criteria, such as passenger or traffic figures, but that serve as “feeder” airports to a main hub

1.3.6 Regional Offices WACAF and ESAF will conduct their A-CDM planning and implementation at a strategic level, and will provide support to the States at a tactical level for the achievement of their objectives and targets.

1.3.7 Regional Offices WACAF and ESAF will provide support to the States in the planning and implementation of their national plans. To provide this support, the Regional Office will coordinate with the corresponding States through the necessary virtual and on-site technical assistance by their officers and other selected experts.

## 2. Chapter 2: A-CDM Implementation guidance

### 2.1 Overview of A-CDM

2.1.1 Airport collaborative decision-making (A-CDM) is a set of processes developed from the general philosophy of collaborative decision-making (CDM) in aviation and is applied to aerodromes operations.

#### *Benefits*

2.1.2 A-CDM can optimize airport operations, by enhancing the turnaround process and improving flight predictability through real time data exchange for all A-CDM stakeholders.

2.1.3 A-CDM also potentially helps to improve gate/aircraft stand management, reduce apron taxiway and holding point congestion. A-CDM involves implementing a set of operational procedures supported by sharing of timely and accurate information amongst A-CDM stakeholders.

2.1.4 Overall, A-CDM is about making more efficient use of existing capacity and resources, as well as potentially better recovery from disruptions. A-CDM can, in some cases reduce operating cost attributed to fuel burn, which contributes to environmental benefits.

#### *Requirements*

2.1.5 Any implementation of A-CDM must be based on assessment of current operational constraints and the value that an A-CDM implementation will generate to mitigate such constraints and / or improve current operations.

2.1.6 There is a set of essential elements as well as best practices to consider when implementing A-CDM that will simplify and harmonize the implementation. These elements must be implemented as prescribed to be effective.

2.1.7 However, each implementation must be based on careful engagement across all airport stakeholders, primarily the Airport Operator, Aircraft Operators, Ground Handling Agents, Air Navigation Service Provider and Air Traffic Flow Management Unit (if any).

#### *Paradigm shift*

2.1.8 Prior to A-CDM, the stakeholders worked on the basis of “first come first served” in the aircraft start-up sequence. A-CDM works on the premise of “best planned best served”, whereby ATC will optimise the pre-departure sequence, by generating Target Start-up Approval Times (TSAT), using Target Off-Block Times (TOBT) submitted by Aircraft Operators or their delegate (e.g. Ground Handling Agents). It is a collaborative approach amongst all the A-CDM stakeholders and the success is ultimately dependent on the **accuracy and quality of TOBTs** which are managed by Aircraft Operators.

2.1.9 To aid the generation of accurate TOBTs and TSATs in the A-CDM process, timely and accurate information updates are very important. The key information needed is ELDT, EIBT, ALDT and AIBT from the arriving flight that is linked to the departing flight. Timely update of this information is related to the A-CDM milestones.

## 2.2 A-CDM Project Phases

2.2.1 A-CDM project activities may be grouped into three phases as illustrated in Figure 2-2:

- Initiation;
- Implementation;
- Testing and Validation, and
- Operation and monitoring.

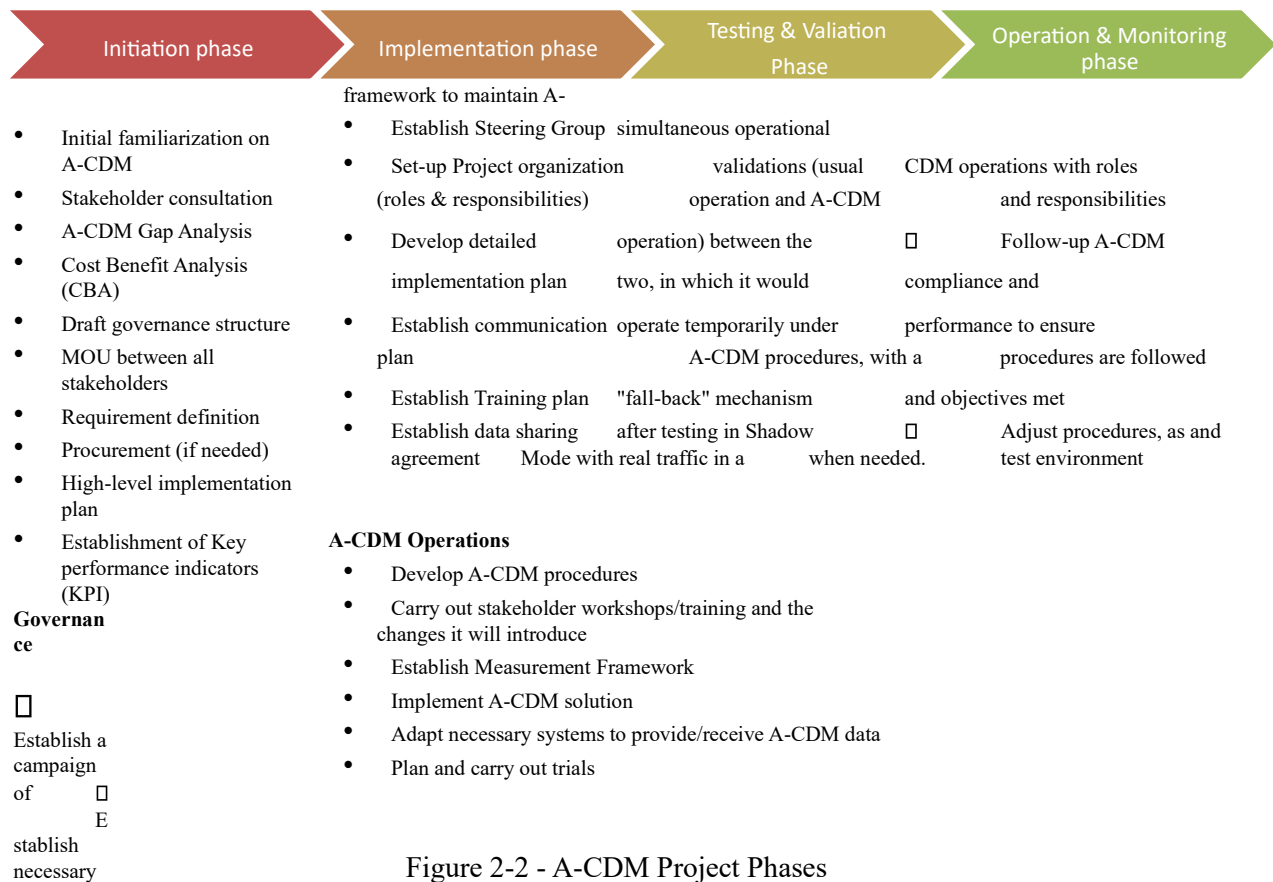


Figure 2-2 - A-CDM Project Phases

2.2.2 The initiation phase is about defining the necessity, including gap analysis, making the cost and benefit analysis, and ultimately making a decision to go ahead to invest in the implementation phase.

2.2.3 By necessity is understood an operating environment close to saturation, or even a forecast of saturation in the short-medium term, or simply the search to optimize its operating processes with a

view to reduce costs and inefficiencies, being the A-CDM a solution to optimize the use of existing resources prior to the arrival of this state of saturation of the infrastructure. It could also be understood by necessity the improvement of operational performance indicators or the improvement in the interaction between stakeholders involved in the operation of the airport. Even in regional airports that do not have notable operational problems, the necessity could be to become part of a regional "network" to share information with the main hubs of a country or region.

2.2.4 During this initial phase, is important to review the current procedures and systems that each stakeholder has, and how these may communicate to share information. When implementing, it is important to realise the benefit of integrating several sources of information in an automated way to facilitate collaboration. This may raise integration/interface costs for the project.

2.2.5 During this phase, the agreement of all interested parties through a **Memorandum of Understanding (MoU)** or other mechanism that serves as a formal basis to guarantee the commitment of the parties is critical. [Appendix F](#) includes a model MoU (taken from Appendix III-A of Document 9971) that can serve as the basis for this process.

2.2.6 The project implementation phase is to undertake the activities to successfully carry out the A-CDM project, which is different from many other implementation projects due to its multistakeholders' involvement and impact on operations.

2.2.7 The testing and validation phase refers to a campaign of simultaneous operational validations between the two in which it would operate temporarily under A-CDM procedures with a "fall-back" mechanism or return to normal operation. , after testing in Shadow Mode with real traffic in a test environment.

2.2.8 The operations phase is about when A-CDM is up and running.

2.2.9 This document focuses on highlighting some of the most critical activities to consider in the implementation phase.

## **2.3 Key Considerations for A-CDM Implementation Phase**

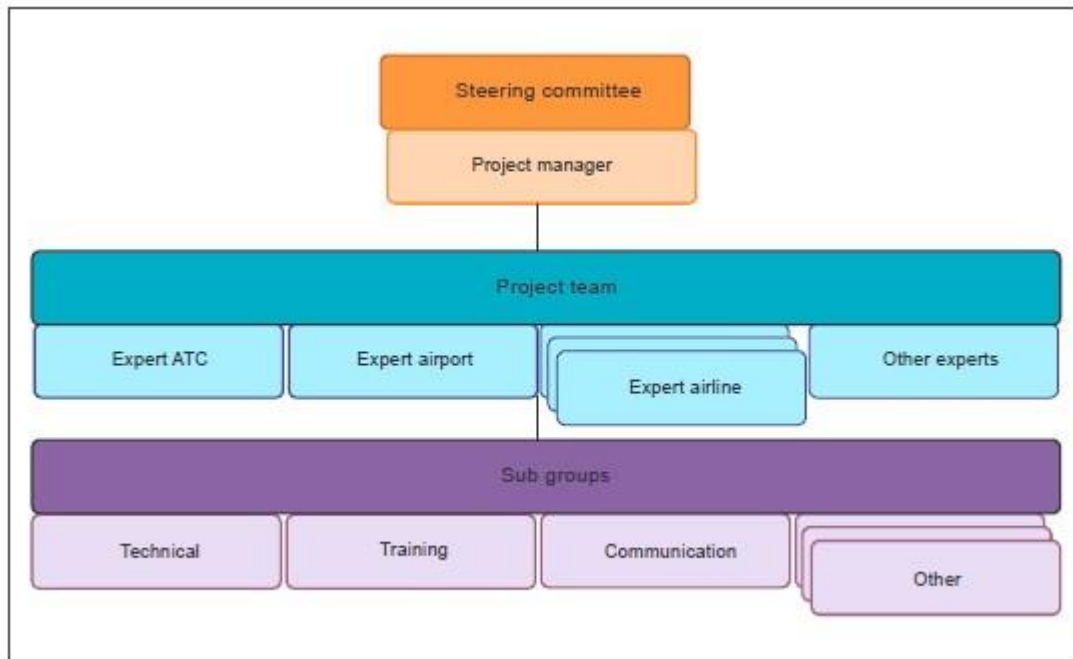


Figure 2-1: Example of an A-CDM project organization (taken from Doc9771)

2.3.1 A-CDM Steering Group comprising of all relevant stakeholders, (which is a minimum of the Airport Operator, Ground Handling Agents, ANSP and Aircraft Operators), should be set up before any implementation. It has the responsibility to agree on the A-CDM processes, procedures, performance framework, data sharing and common definitions. Generally, this is initiated by the Airport Operator.

2.3.2 The A-CDM Steering Group should define clear roles and responsibilities in the implementation phase for the A-CDM stakeholders, i.e. “who” is doing “what” and “when” in the implementation project. This is not to be confused with the “roles and responsibilities” of the stakeholders in the A-CDM process, which is something different and addressed in the “Harmonization Framework” section.

2.3.3 A-CDM Project Management Team should be established and involve all A-CDM stakeholders during design and implementation of A-CDM project. This team would be comprised of operational personnel (technical) with knowledge of the operation of the tasks of their organization related to the operation at the airport.

2.3.4 Ensuring early engagement with stakeholders and installing a **collaborative culture** will support the success of an A-CDM implementation. This process should create clarity across ACDM stakeholders on the objectives of the implementation, and the expectations from each party. With clear and agreed objectives across all key stakeholders, A-CDM implementation should yield projected benefits and will prevent sub-optimal operations or limited return on investment for the airport.

2.3.5 As A-CDM is a change in procedures, it can also be a huge cultural and behavioural change for all A-CDM stakeholders that should not be underestimated. In order to address this challenge,



appropriate communication and training plans should be put in place to facilitate the understanding and impact of A-CDM for each stakeholder.

2.3.6 Local A-CDM Operational Procedures should be developed in collaboration with the stakeholders. These procedures need to detail, at a minimum, roles and responsibilities, i.e. “who is doing **what, when and how**” in the A-CDM process. During this work, implementers should look to other A-CDM procedure manuals and related materials to leverage experience gained and lessons learnt.

2.3.7 The implementation should take a phased approach, including trials, with a minimum of disturbance to A-CDM stakeholders’ operations.

2.3.8 A framework of reviews to track progress of A-CDM implementation should be created by the A-CDM steering group. This framework aims to ensure that the implementation phase timelines and objectives are met.

2.3.9 A performance framework to measure Key Performance Indicators (KPI) should be established as early as possible in the initiation phase, to enable efficient measurement from the start of the implementation. In preparing these indicators, the Global Air Navigation Plan (GANP) indicators available at <https://www4.icao.int/ganportal/ASBU/KPI> should be considered.

## **2.4 Stakeholder Access to A-CDM Data**

2.4.1 A-CDM requires airport stakeholders to exchange timely operational information which enables collaboration in the efficient management of operations at an airport.

2.4.2 Data exchanges via the common interfaces should support the entire data related to ACDM elements and milestones. Full scope messaging will provide context to enhance situational awareness.

2.4.3 Some of the Stakeholders may have systems set-up with different acronyms or milestones in respect to the ones agreed by the A-CDM Project implementation group. Special care should be taken to ensure access to the data of these sources.

2.4.4 As for now, there is no common agreed Information Exchange Model by ICAO to share A-CDM data, however, the industry, mainly IATA and ACI, have agreement on the use of Aviation Information Data Exchange (AIDX) as a data exchange model of A-CDM data among stakeholders using commercial flight identification (outside the ATM domain). AIDX is an extensible Mark-up Language (XML) messaging standard for exchanging flight data among airlines, airports, ground handlers and other third party data consumers.

2.4.5 In the future, FIXM (Flight Information Exchange Model), the model identified by ICAO as the one that will be used on the ATFM domain of a Flight, will address A-CDM; therefore, FIXM shall be at least semantically consistent with AIDX, in case of overlap of information.<sup>1</sup>

---

<sup>1</sup> The FIXM Strategy; <https://www.fixm.aero>; version 1.0, Feb. 2014

2.4.6 The adoption of **an open source platform** for an A-CDM Information Sharing Platform (ACISP) is encouraged in order to reduce the license cost to A-CDM stakeholders wishing to implement data exchange via the common Application Programming Interface (API).

2.4.7 Consideration shall be given to those stakeholders, such as general aviation, that may need a common use interface to input/read A-CDM related information to/from the ACISP. This may be done by Human Machine Interfaces (HMI), websites, Open API's, or by reporting it to the Airport Operations Center (APOC) via radio or phone communications, following an agreed procedure to do so.

## **2.5 Achieving an Effective and Efficient Turnaround Process**

2.5.1 The turnaround process encompasses the complete management of an aircraft from the arrival at an airport to the departure (from AIBT to AOBT) that needs to be effective and efficient in order to contribute to a successful A-CDM implementation.

2.5.2 The A-CDM turnaround process involves stakeholders, operational services, data points and algorithms that are instrumental to successful turnaround of an aircraft.

2.5.3 To ensure good interaction amongst stakeholders the understanding, management and ownership of the TOBT is of utmost importance. It is recommended that, in the initial phases of implementation, manual calculation and validation processes of the TOBT are established before its implementation in an automated manner. Many airports around the world are calculating "Predicted TOBTs" in an automatic manner, but it's worth making the point that these are distinct from the TOBT, as ultimately the Aircraft Operator (or delegated to its ground handler) is the only stakeholder that can manipulate its operation and determine the real TOBT. This will improve performance of the turnaround.

2.5.4 A departure sequence capability should be introduced that produces wished Target Start-up Approval Times (TSATs) and Target Take off Times (TTOTs). This is to deliver transparency, better recovery and improvements to Calculated Take-Off Time (CTOT) compliance. The capability should evolve with the A-CDM implementation and the "Operation and Monitoring" phase.

2.5.5 The Variable Taxi Times (VTTs) are of utmost importance for the A-CDM processes to work, including producing automated updates to Estimate in Block Times (EIBTs) as well as the Target Start-up Approval Times (TSATs) and Target Take off Times (TTOTs). The practical implementation of VTTs can vary from static values (e.g. fixed taxi times from runways to individual gates or blocks of it) to highly dynamic VTTs that take ground movement patterns, changes at the airfield and changes to traffic flows due to weather into account. How advanced and dynamic, the VTTs need to be considered in the implementation where the complexity of traffic patterns and airport layout are factors to be considered. The more accurate the VTTs are, the better the overall predictions and sequencing of traffic will be.

2.5.6 The Minimum Turn-Round Time (MTTT) is also very important for the A-CDM processes to work. It comes into play to help calculating Target off Block Times (TOBTs) based on Estimated in Block Times (EIBTs) or Actual in Block Times (AIBTs). The MTTTs will depend on factors such as aircraft type, possibly type of stand, airline procedures, destination etc. The values and implementation of MTTTs should be discussed in close cooperation with the Airline Operators to ensure accurate values are used. MTTTs not representative of the operations will result in less accurate TOBTs as well as TSATs and TTOTs, as long as TOBTs are not manually controlled by the Airline Operator or Ground Handling Agents.

## **2.6 Building a Continuous Improvement Culture**

2.6.1 A-CDM implementation involves the interaction of multiple stakeholders, processes and systems. A culture of continuous improvement amongst all stakeholders will benefit all involved.

2.6.2 Following its implementation, the environment at an airport will change and may require adjustments in the A-CDM processes.

2.6.3 After A-CDM implementation, it is important that the focus remains on continuous improvement and developing the overall A-CDM system to ensure optimized utilization of airport infrastructure. The project should be able to support a suitable improvement mechanism.

2.6.4 All stakeholders should be able to monitor improvements from an A-CDM implementation. For this purpose, it is recommended to maintain the originally organized A-CDM Working Group. Among the topics to be discussed, should consist of:

- a) Performance evaluation (monitoring of KPI's).
- b) Exchange of experience at regular intervals.
- c) Ad-hoc meetings before any major release of new software or update of the A-CDM implementation (procedural or functional). Ideally, this should be supported by a consensus achieved by discussion amongst impacted stakeholders.
- d) ICAO WACAF or ESAF Regional Offices can be approached to solicit views on new implementations or improvement opportunities.

2.6.5 Where ATFM exists, the Airport-CDM and ATFM should collaborate to improve airport operations especially for capacity planning and impact of performance degradation at other airports.

## **2.7 Measure Effectiveness of A-CDM Implementation**

2.7.1 With the implementation of A-CDM there will be a change from current operating procedures as it introduces two new time elements, namely Target off Block Times (TOBTs) and Target Start-up Approval Times (TSATs) and the procedures around these time elements. More specifically the operational changes relate to:

- The management, including input and updates as needed, of Target off Block Times (TOBTs) for either the aircraft operator or the ground handler.
- The management, including input and updates as needed, of TSATs for the Air Navigation Service Provider (ANSP)
- The start-up and push back procedures.

2.7.2 It is very important that the impacts of these procedure changes are measured so that the effectiveness of the A-CDM implementation can be assessed. This will allow all stakeholders to effectively monitor how the A-CDM procedures are complied with, and identify where improvement can be made, which is just as important as getting A-CDM implemented in the first place.

2.7.3 Key performance indicators (KPIs) related to TOBT and TSAT are required to assess the effectiveness of an A-CDM implementation.

2.7.4 Other KPIs may be used as supplement for monitoring the performance of the A-CDM.

#### *Measurements of TOBT*

2.7.5 Achieving inputs and updates of TOBT, as accurate as possible, is one of the first steps in the A-CDM implementation. The Aircraft Operators or Ground Handling Agents will need to provide a TOBT for all departing flights to enable the A-CDM procedures to flow efficiently and effectively. Without TOBT, there will be no predictability of departure readiness and TSAT will not be available.

2.7.6 The following measurements are related to TOBT.

Table 2-1 – Measurement of TOBT

<b>Name of the indicator</b>	<b>TOBT input participation rate</b>
Value of indicator	Allows the A-CDM project team to see the amount of participation from airlines/ground handling agents in TOBT inputs before proceeding to measure the accuracy and use TOBT for pre-departure sequencing.
Data requirement	Manual TOBT updates/inputs
Formula	Track number of TOBT inputs from each airline and ground handling agent through different time references before departure, e.g. at TOBT-10min, 20min and -40min
Indicator forms	Participation rate in TOBT inputs and when does it occur.
Tips/Warnings	It is important to achieve a high % of participation in order for the A-CDM concept to work. A-CDM with low participation rate will lead to questions on fairness when TSAT is used for pushback and eventually the collaborative concept may fail. To improve the participation rate, more A-CDM awareness workshops or compliance measures may be required.
System Requirements	A-CDM data analysis tool portal, if available, or TOBT input records

Table 2-2 – Accuracy of TOBT

<b>Name of the indicator</b>	<b>TOBT Accuracy</b>
Value of indicator	Allows airlines/ground handling agents to understand whether their TOBT submission workflow/process is effective in achieving an accurate TOBT. Allows the A-CDM project team to assess whether the TOBT quality is acceptable and can be used to generate TSAT. It also gives a general indication of compliance rate for TOBT submission.
Data requirement	<ul style="list-style-type: none"> <li>• TOBT</li> <li>• Actual Ready Time (ARDT) and/or Actual start-up request time (ASRT)</li> </ul>

Formula	<ul style="list-style-type: none"> <li>• Compare TOBT against ARDT and/or ASRT</li> <li>• Compare TOBT against AOBT</li> </ul>
Indicator forms	<ul style="list-style-type: none"> <li>• Accuracy of TOBT</li> <li>• TOBT compliance rate</li> </ul>
Tips/Warnings	<p>Low TOBT accuracy with high TOBT participation rate indicates that the airline/ground handling may have to improve their internal workflow/process to update TOBT.</p> <p>The way to measure the accuracy of the TOBT depends on the procedures applied for the A-CDM implementation. To be able to measure the TOBT accurately, it is highly recommended that the pilot calls ready within an agreed window of the TOBT and that ATC indicates this time via an ARDT or ASRT.</p>
System Requirements	<ul style="list-style-type: none"> <li>• Data analysis tool of the A-CDM portal, if available, or TOBT input records</li> <li>• AOBT from an appropriate source, ARDT and/or ASRT from an Electronic Flight Strip system or alternative means.</li> </ul>

**Note:** Some European airports benchmark their TOBT compliance at 80%.

#### *Measurement of TSAT*

2.7.7 A Pre-Departure Sequencer/Departure Manager solution might be used for pre-departure sequencing in the A-CDM implementation, which should be generating an optimal TSAT to achieve the best sequence to maximize runway throughput and regulate traffic to a holding point.

2.7.8 TSAT compliance plays an important role in achieving the objective of reducing taxi-out time and also shows the level of commitment to TSAT in the A-CDM procedures.

2.7.9 Considerations of TSAT adherence and TOBT quality may need to be addressed on the MoU drafting, including actions in case none of this is followed.

Table 2-3 – Measurement of TSAT

Name of the indicator	TSAT Compliance
Value of indicator	Allows the A-CDM project team to assess if ATC is following the TSAT for pushback and also the pilots' adherence to the TSAT procedure.
Data requirement	<ul style="list-style-type: none"> <li>• ASRT</li> <li>• TSAT</li> <li>• Actual Start-up Approval Time (ASAT)</li> <li>• AOBT</li> </ul>
Formula	<ul style="list-style-type: none"> <li>• Compare ASRT and/or ASAT against TSAT</li> <li>• Compare AOBT against TSAT</li> </ul>
Indicator forms	<input type="checkbox"/> TSAT compliance rate
Tips/Warnings	<p>If the compliance level is low, it may mean that ATC/Pilots do not followed the A-CDM procedures or that ATC did not enforce TSAT compliance or that the TOBT submitted by airlines/ground handling agents is not up to desired accuracy. In addition, PDS processes may need to be reviewed if TSAT's generated could be complied.</p> <p>How to measure the compliance to the TSAT depends on the procedures applied for the A-CDM implementation? To be able to measure the compliance, it is highly recommended that the pilot requests, within a window of the TSAT and that ATC indicates this time via an ASRT. ATC shall also give the start-up approval within the given TSAT window and indicate this via an ASAT</p> <p>It is considered important to highlight the difference between Start-Up, normally referred to FPL approval, and Push-back, referred to authorization to leave the stand</p>
System Requirements	<ul style="list-style-type: none"> <li>• Data analysis tool of the A-CDM portal, if available, or TSAT records from DMAN/PDS</li> <li>• AOBT from an appropriate source</li> <li>• ASRT and/or ASAT from an Electronic Flight Strip system or alternative means.</li> </ul>

**Note:** Some European airports benchmark their TSAT compliance at 80%.

### 3. Chapter 3: Harmonization Framework

#### 3.1 A-CDM Terminologies (vocabulary) and Definitions

3.1.1 As more and more airports adopt A-CDM, it is important that implementations strive for harmonization with respect to certain areas. This relates to certain procedures, roles and responsibilities, as well as having common understanding of terminologies.

3.1.2 Groups with limited interaction often develop their own semantic references; airport stakeholders are not an exception, as they may use different terminologies to cover the same reality. A lack of common definitions and understanding of terms across the stakeholder community can exacerbate misunderstanding and contribute to the lack of common situational awareness.

3.1.3 For example, “arrival time” to an air traffic controller (ATCO) could mean at the point of touchdown, whereas for an airline or ground handling agencies “arrival time” may be understood as the time when an aircraft is at the gate. This disparity in a common definition of terms leads to a lack of shared awareness and clarity of the operational picture, which can lead to confusion and result in increased inefficiencies.

3.1.4 Given that A-CDM brings stakeholders together as part of the procedures and collaboration, it is of highest importance to implement common acronyms and definitions that are agreed and understood by all. To ensure harmonization not only at the local airport level in an A-CDM implementation, but at the regional level, the following A-CDM definitions are highly recommended to be adopted as part of an A-CDM implementation.

3.1.5 These acronyms and definitions are aligned with overarching ICAO definitions, where applicable, as well as EUROCONTROL A-CDM acronyms and definitions.

Table 3-1 – A-CDM Acronyms and Definitions

Acronyms	Definition	Explication
ACGT	Actual Commence of Ground Handling Time	The time when ground handling on an aircraft starts, can be equal to AIBT (to be determined locally)
ACZT	Actual Commencement of De-icing Time	The time when de-icing operations on an aircraft starts
ADIT	Actual De-icing Time	The actual time that the de-icing activity takes. Metric AEZT – ACZT
AEGT	Actual End of Ground Handling Time	The time when ground handling on an aircraft ends.
AEZT	Actual End of De-icing Time	The time when de-icing operations on an aircraft end

AGHT	Actual Ground Handling Time	The total duration of the ground handling of the aircraft. Metric ACGT - AEGT
AIBT	Actual In-Block Time	The time that an aircraft arrives in-blocks.
ALDT	Actual Landing Time	The time that an aircraft lands on a runway.
AOBT	Actual Off-Block Time	Time the aircraft pushes back /vacates the parking position.
ARDT	Actual Ready Time	When the aircraft is ready for start-up/push back or taxi immediately after clearance delivery, meeting the requirements set by the TOBT definition
ARZT	Actual Ready for De-icing Time	The time when the aircraft is ready to be de-iced
ASAT	Actual Start Up Approval Time	Time that an aircraft receives its start-up approval
ASBT	Actual Start Boarding Time	Time passengers are entering the bridge or bus to the aircraft
ASRT	Actual Start Up Request Time	Time the pilot requests start up clearance
ATOT	Actual Take-Off Time	The time that an aircraft takes off from the runway.
ATTT	Actual Turnaround Time	Time taken to complete turnaround. Metric AOBT – AIBT
AXIT	Actual Taxi-In Time	Time taken to taxi to stand after landing

Acronyms	Definition	Explication
		Metric AIBT – ALDT
AXOT	Actual Taxi-Out Time	Time taken from pushback to take-off Metric ATOT – AOBT
CTOT	Calculated Take-Off Time	A time calculated and issued by the appropriate air traffic management unit as a result of tactical slot allocation, at which a flight is expected to become airborne



ECZT	Estimated Commencement of De-icing Time	The estimated time when de-icing operations on an aircraft are expected to start
EDIT	Estimated De-icing Time	Metric EEZT – ECZT
EEZT	Estimated End of De-icing Time	The estimated time when de-icing operations on an aircraft are expected to end
EIBT	Estimated In-Block Time	The estimated time that an aircraft will arrive in-blocks. NOTE – This can sometimes be referred to as Estimated Time of Arrival (ETA) by Aircraft Operator. It is important to clarify the ETA in relation to EIBT and ELDT.
ELDT	Estimated Landing Time	The estimated time that an aircraft will touch-down on the runway. NOTE – This can sometimes be referred to as Estimated Time of Arrival (ETA) by ATC. It is important to clarify ETA in relation to EIBT and ELDT.
EOBT	Estimated Off-Block Time	The estimated time at which the aircraft will start movement associated with departure; also associated with the time filed by aircraft operator in the flight plan
ERZT	Estimated Ready for De-icing Time	The estimated time when the aircraft is expected to be ready for de-icing operations
ETOT	Estimated Take-Off Time	The estimated take off time taking into account the EOBT plus EXOT.
ETTT	Estimated Turnaround Time	The time estimated by the AO/GHA on the day of operation to turn-round a

Acronyms	Definition	Explication
		flight taking into account the operational constraints
EXIT	Estimated Taxi-In Time	The estimated taxi time between landing and in-block

EXOT	Estimated Taxi-Out Time	The estimated taxi time between off-block and take off. This estimate includes any delay buffer time at the holding point or remote de-icing prior to take off
MTTT	Minimum Turnaround Time	The minimum turnaround time agreed with an AO/GHA for a specified flight or aircraft type
SIBT	Schedule In-Block Time	The time that an aircraft is scheduled to arrive at its first parking position.
SOBT	Schedule Off-Block Time	The time that an aircraft is scheduled to depart from its parking position; associated with airport slot allocation NOTE – this is typically referred to as Scheduled Time of Departure (STD) by the Aircraft and Airport Operators.
TOBT	Target Off-Block Time	The time that an Aircraft Operator or Ground Handling Agent estimates that an aircraft will be ready, all doors closed, boarding bridge removed, push back vehicle available and ready to start up / push back immediately upon reception of clearance from the control tower.
TSAT	Target Start-up Approval Time	The time provided by ATC taking into account TOBT, CTOT and/or the traffic situation that an aircraft can expect start-up / push back approval
TLDT	Target Landing Time	Targeted Time from the Arrival management process at the threshold, taking runway sequence and constraints into account. It is not a constraint but a progressively refined planning time used to coordinate
<b>Acronyms</b>	<b>Definition</b>	<b>Explication</b>

		between arrival and departure management processes. Each TLDT on one runway is separated from other TLDT or TTOT to represent vortex and/or SID separation between aircraft
TTOT	Target Take-Off Time	The Target Take Off Time taking into account the TOBT/TSAT plus the EXOT. Each TTOT on one runway is separated from other TTOT or TLDT to represent vortex and/or SID separation between aircraft

## 3.2 Roles and Responsibilities of A-CDM stakeholders

3.2.1 This section outlines the general responsibilities of the A-CDM stakeholders as part of the A-CDM process and procedures. It is recommended that any implementer tries to adopt this approach as far as practically feasible. However, it is recognised that local rules (from local airports, etc.) might prohibit this.

3.2.2 The **Aircraft Operator** is generally responsible for:

- Providing the Flight Plan and any subsequent updates, i.e. DLA/CHG/CNL messages.
- Managing and providing TOBT either themselves or through their authorised GHA.
- Ensuring the flight crew is aware of the channels where TOBT and TSAT information can be obtained, as it is dependent on local procedures.
- Ensuring that their flight crew are aware of start-up and push-back procedures.
- Any change in registration or type of aircraft of ARR/DEP flights, the same should be provided to A-CDM system either directly or through a connected system (like AODB, CHG/FPL message)

3.2.3 The **Ground Handling** Agent will be responsible for the ground handling start milestone and, when authorised by aircraft operator, is responsible for providing information as mentioned in the responsibilities listed above for the Aircraft Operator

3.2.4 The **Airport Operator** is generally responsible for:

- Providing flight schedule information and any changes therein;
- Provide information that you have available in your systems such as ASBT, AIBT or AOBT among others;
- Providing aircraft parking stand and gate planning/allocation and any changes therein; and
- Overall coordination of the A-CDM process during implementation and operations, including monitoring of performance of A-CDM operations.

3.2.5 The **Air Navigation Service Provider Control Tower (ANSP/TWR)** is generally responsible for:

- Providing runway-in-use and planned runway-in-use;
- Providing expected runway capacity, and minimum arrival/departure separation; Providing TSAT & TTOT
- When applicable, providing flow control restrictions, e.g. Minutes in Trail and/or Miles in Trail; and
- Ensuring that start-up is issued in accordance with TSAT

3.2.6 ELDT can be collected from different sources, such as airlines, ANSP and ATFM. In the arrival phase of the flight, ANSP is normally the source for providing the latest updates on ELDT.

3.2.7 The role of the ANSP can vary in the context of A-CDM in relation to how the pre departure sequencing is handled. There are two different scenarios, as follows:

- a) If pre departure sequencing capability is available (e.g. a DMAN already installed in the ATC TWR): the ANSP should make arrangements to integrate pre departure sequencing tool's output with the A-CDM system.
- b) If pre departure sequencing capability is not available: the ANSP should provide appropriate procedures and requirements to generate pre departure sequence.

3.2.8 The **Air Traffic Flow Management Unit (ATFMU)**, when established, is generally responsible for:

- Balancing of Demand and Capacity;
- Receiving relevant A-CDM data from airports for your own processes;
- Coordination of Calculated Take Off Times (CTOTs/ATFM slots); and
- Provision of updated ATFM restrictions

3.2.9 In cases where de-icing is applied, the de-icing Operator is generally responsible for:

- Providing the de-icing status of the aircraft
- Prediction of the estimated de-icing times such as ECZT, EEZT

### 3.3 Standardization of A-CDM Procedures

3.3.1 Since the introduction of A-CDM, there have been many airports that have adopted the A-CDM philosophy. The expansion of implementations has led to some differences in procedures and processes. These differences may create problems for stakeholders. A harmonized approach can reduce workload. Although these differences do not constitute a compromise to safety, they constitute unnecessary additional layers of complexity.

3.3.2 Standardisation of certain A-CDM procedures to drive efficiency and overall performance is necessary. On the other hand, each airport may have its unique implementation plan and should have the flexibility to layout its local processes and procedures, which are adapted to its own environment and operational need. However, there are a number of standards that could be applied globally or at a regional level (e.g. TOBT/TSAT procedures and compliance windows). The operations of stakeholders

need to be standardized whenever possible, as the burden of differing processes may bring in inefficiency, confusion and costs.

3.3.3 The way in which procedures and processes are designed needs to incorporate input from A-CDM stakeholders. This should be a collaborative approach, ultimately agreed by all stakeholders.

3.3.4 The steering group would address high-level and strategic issues, such as the approval of schedules, while the **working group** looks at practical aspects of implementation and should discuss the non-compliance with procedures to eliminate difficulties faced by the interested parties of the A-CDM.

3.3.5 States are encouraged to look for ways to standardize procedures and compliance windows, particularly concerning TOBT/TSAT in order to guarantee harmonization.

### **3.4 Target off Block Time (TOBT) and Target Start-up Approval Times (TSAT)**

3.4.1 The Target off Block Time (TOBT) and Target Start-up Approval Time (TSAT) are critical to the A-CDM process. Based on an accurate prediction of aircraft readiness for departure, the TOBT, the Aircraft Operator, or the designated Ground Handling Agents, ATC can plan the optimal pre-departure sequence and TSAT at which aircraft are dispatched from the parking stands. This dynamic mechanism between the prediction when all ground handling activities will end, i.e. at the defined TOBT and TSAT allocation, **are the core pillars of A-CDM**. This is also what it referred to as **“Best planned, best served”** principles

3.4.2 *TOBT is defined as “The time that an Aircraft Operator or Ground Handling Agent estimates that an aircraft will be ready, all doors closed, boarding bridge removed, push back vehicle available and ready to start up / push back immediately upon reception of clearance from the control tower.”*

3.4.3 TOBT can be predicted by tracking the flight events, so-called **Milestones**, that occur prior to landing and during the turnaround process. In order to achieve TOBT accuracy, close coordination of turnaround activities and sharing of operational information among different stakeholders is needed.

**3.4.4 TOBT is the most important timing of the turnaround process and this timing is essential for the calculation of TSAT.**

3.4.5 The TOBT should be confirmed/input at least “X1” minutes prior to the SOBT/EOBT and available for all stakeholders [X1 is preferably 30-40].

3.4.6 TSAT is defined as “the time provided by ATC taking into account TOBT, CTOT and/or the traffic situation that an aircraft can expect start-up / push back approval”. In order to determine the TSAT an A-CDM implementation should consist of departure management capability (including VTT), such as Pre-Departure Sequencer or Departure Manager

3.4.7 The TSAT should be published at least “X2” minutes prior to the TOBT and available for all stakeholders [X2 is preferably 30-40].

### 3.5 Sharing of TOBT and TSAT

3.5.1 Sharing of the TOBT and TSAT information to flight crew is fundamental for a successful A-CDM implementation. Dependent on the local procedures and total system solution this information sharing may be done in multiple ways. How it is done needs to be agreed with the stakeholders. Examples of how to share the TOBT and TSAT to the flight crew are:

- VDGS / A-VDGS (preferred)
- Mobile application available to flight crew
- Airport Operator or Ground Handler designated role communicates TOBT and TSAT directly to flight crew.
- Aircraft Operator or Ground Handler communicates the TOBT and TSAT.
- Open API's giving stakeholders flexibility in developing suitable solutions

### 3.6 A-CDM Start-up Procedures

3.6.1 Currently, airports that have fully adopted A-CDM processes, exhibit differences in their requirements for when pilots should be ready for start and push back, and report ready for start and pushback. These differences may cause confusion, in particular to pilots who operate through several airports.

3.6.2 The operating procedure related to Start-up and Push-back in the A-CDM process must clearly define the requirement of the time at which the pilot should initiate call for start-up.

3.6.3 Irrespective of the TSAT, the aircraft should report/be ready for start-up/push-back at TOBT +/- "X3" minutes [**X3 is preferably 5**].

3.6.4 Pilots should request start/pushback clearance at the TSAT +/- "X4" minutes [**X4 is preferably 5**].

3.6.5 ATC will approve start/push-back or advise the pilots of the current/updated TSAT.

3.6.6 Any time the TOBT or TSAT cannot be met, or an earlier departure is required, the TOBT should be updated expeditiously by the Aircraft Operator or/Ground Handling Agent.

3.6.7 Departure clearance should be requested via Data Link Departure Clearance (DCL) at TOBT/TSAT +/- X5 minutes (X5 is defined by the local airport authority). If DCL is not available, departure clearance should be requested via RTF/Clearance Delivery at TOBT/TSAT +/- X5 minutes.

### 3.7 Milestone Approach

3.7.1 The Milestone approach is defined to:

- a) Start and end the A-CDM process for any flight that is defined to be part of the A-CDM process and;
- b) Update information about the flight at certain points during the inbound, turnaround or outbound phase.

3.7.2 In the A-CDM Process, 16 milestones are defined as per the EUROCONTROL Manual. It is important to note that not all 16 have to be used for a successful A-CDM implementation at an airport but some are required and some are optional. Ultimately, which milestones are used is dependent on the local A-CDM rules, procedures and data availability.

3.7.3 Figure 3-1 depicts all the 16 milestones and when they occur in relation to the flight phases, i.e. inbound, turn around and outbound. Please note that the figure does not show how the milestones occur in relation to time. Another important note is that Milestones 1 and 2 are related to the outbound flight from the A-CDM airport and not related to the inbound flight coming to the ACDM airport.

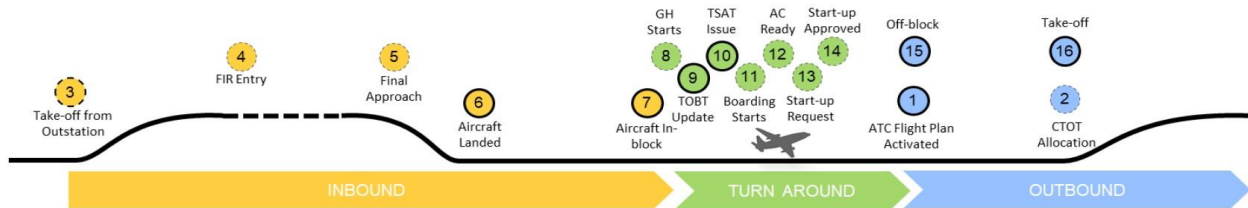


Figure 3-1: 16 Milestones of A-CDM in relation to Flight Phases

3.7.4 Table 3-2 provides a comprehensive overview of the milestones including:

- What the purpose of the milestone is;
- How the Milestone is triggered;
- What data needs to be provided;
- A-CDM Actions;
- Example of system(s) that can provide the data; and whether the milestone is required or optional.

Table 3-2: Proposed A-CDM Milestones (MS) for the APIRG Region

Milestone	Purpose of the Milestone	Milestone is triggered by	Data Elements	A-CDM Actions	Example of system(s) that typically has this data (and should share it)	Required/ Optional
<b>MS1 ATC Flight Plan Activated</b>	<ul style="list-style-type: none"> <li>Starts the A-CDM process for a flight</li> <li>To check the data consistency between Airport Slot and Airline's flight plan data (EOBT vs SOBT, aircraft registration and aircraft type)</li> </ul>	ATC flight plan is submitted by Aircraft Operator (this happens typically at EOBT-3hrs but can also be later)	<ul style="list-style-type: none"> <li>Schedule Time of departure and arrival for the flight (STD/SOBT and ETA/SIBT)</li> <li>Flight Plan EOBT</li> <li>Gate/Stand</li> </ul>	Calculate: ELDT, EIBT, TOBT, TSAT, TTOT Present/Disseminate ELDT, EIBT, EOBT, SOBT, TOBT, TSAT, TTOT	<ul style="list-style-type: none"> <li>TWR Flight Data Processing System</li> <li>ACC Flight Data Processing System</li> <li>AODB/RMS</li> </ul>	Required
<b>MS2 CTOT Allocation</b>	To allow early awareness of departure delay if there are enroute/destination airport constraints	CTOT issued by relevant cross-border ATFM nodes (if applicable)	CTOT	Calculate: TSAT BASED on CTOT Present/Disseminate : ELDT, EIBT, EOBT, SOBT, TOBT, TSAT, CTOT	ATFM System or similar capability	Required for a fully integrated A-CDM – ATFM solution <b>but not for a local A-CDM implementation</b>



<b>MS3 Take-off from Outstation</b>	<ul style="list-style-type: none"> <li>To provide an ELDT at early stage by using FPL EET + ATOT.</li> <li>To revise system generated TOBT, TSAT and TTOT if required</li> <li>Allow early awareness of deviation from scheduled in-block</li> </ul>	Take-off from up-station	ELDT	Re-calculate: EIBT, TOBT, TSAT, TTOT Present/Disseminate : ELDT, EIBT, EOBT, SOBT, TOBT, TSAT, TTOT	<ul style="list-style-type: none"> <li>ACC Flight Data Processing System</li> <li>ACARS</li> </ul>	Optional
---	--	--------------------------	------	--	--	----------

Milestone	Purpose of the Milestone	Milestone is triggered by	Data Elements	A-CDM Actions	Example of system(s) that typically has this data (and should share it)	Required/ Optional
	time for resource planning.					
<b>MS4 FIR Entry</b>	<ul style="list-style-type: none"> <li>To estimate ELDT and prompt alert if potential gate conflict is anticipated.</li> <li>To revise system generated TOBT</li> <li>Allow early awareness of deviation from scheduled in-block time for resource planning.</li> </ul>	Aircraft crosses a defined fix on FIR boundary or enters the FIR.	ELDT	Re-calculate: EIBT, TOBT, TSAT, TTOT Present/Disseminate : ELDT, EIBT, EOBT, SOBT, TOBT, TSAT,	<ul style="list-style-type: none"> <li>ACC Flight Data Processing System</li> <li>Extended AMAN</li> <li>ACARS</li> </ul>	Optional

<b>MS5 Final Approach</b>	<ul style="list-style-type: none"> <li>To provide a highly accurate and stable ELDT/TLDT as landing sequence is confirmed</li> <li>To revise system generated TOBT</li> <li>Allow for awareness of deviation from scheduled in-block time for resource planning.</li> </ul>	Aircraft enters the TMA	TLDT or ELDT	Re-calculate: EIBT, TOBT, TSAT, TTOT Present/Disseminate : TLDT/ELDT, EIBT, EOBT, SOBT, TOBT, TSAT, TTOT	<ul style="list-style-type: none"> <li>ACC Flight Data Processing System</li> <li>AMAN</li> <li>ACARS</li> </ul>	Optional
<b>MS6 Aircraft Landed</b>	<ul style="list-style-type: none"> <li>To revise system generated TOBT</li> <li>Allow for awareness of deviation from scheduled in-block time for resource planning.</li> </ul>	Aircraft touches down on runway	Actual Landing Time (ALDT)	Re-calculate: EIBT, TOBT, TSAT, TTOT Present/Disseminate : ALDT, EIBT, EOBT, SOBT,	<ul style="list-style-type: none"> <li>ACC Flight Data Processing System</li> <li>AMAN</li> <li>ACARS</li> </ul>	Required

Milestone	Purpose of the Milestone	Milestone is triggered by	Data Elements	A-CDM Actions	Example of system(s) that typically has this data (and should share it)	Required/Optional
				TOBT, TSAT, TTOT		
<b>MS7 Aircraft In-Blocks</b>	To revise system generated TOBT	Aircraft arriving at the parking stand	Actual In Block Time (AIBT)	Re-calculate: TOBT, TSAT, TTOT Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, TSAT, TTOT	<ul style="list-style-type: none"> <li>A-SMGCS</li> <li>Docking System</li> <li>ACARS</li> <li>AODB</li> </ul>	Required

## A-CDM Implementation Guide| APIRG

<b>MS8 Ground Handling Starts</b>	To revise system generated TOBT  Note: Depending on local environment, ground handling will start once aircraft in-block, i.e. MS8 and MS7 occurs at the same time	Actual start of turnaround activities	AGHT  Note: Depending on local environment, ground handling will start once aircraft in-block, i.e. AGHT = AIBT	Re-calculate: TOBT, TSAT, TTOT Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, TSAT, TTOT	Same as MS7	Optional
<b>MS9 TOBT Update prior to TSAT issue</b>	<ul style="list-style-type: none"> <li>Confirm and take control of TOBT</li> <li>To check the feasibility of TOBT vs SOBT/EOBT.</li> </ul>	TOBT confirmation/update into A-CDM portal from EOBT- “X1” minutes  Note: “X1” is need to be determined locally to fit the operations at the airport. Recommended to be 30 to 40 minutes.	TOBT	Re-calculate: TSAT, TTOT Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, TSAT, TTOT	Manual input via: <ul style="list-style-type: none"> <li>A-CDM Portal</li> <li>Mobile Apps</li> <li>Airline/GHA systems</li> </ul>	Required
<b>MS10 TSAT Issue</b>	To allow decision making based TOBT and TSAT values	At TOBT – “X2” minutes, TSAT will be published	TSAT	Re-calculate: TTOT Present/Disseminate : ALDT, AIBT, EOBT, SOBT,	A-CDM/PDS	Required

Milestone	Purpose of the Milestone	Milestone is triggered by	Data Elements	A-CDM Actions	Example of system(s) that typically has this data (and should share it)	Required/ Optional
	Create a stable predeparture sequence	Note: “X2” is need to be determined locally to fit the operations at the airport. Recommended to be 30 to 40 minutes.		TOBT, TSAT, TTOT		

<b>MS11 Boarding Starts</b>	To check if boarding has started as expected.	Actual start for Boarding of passengers	ASBT	Re-calculate: - Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, TSAT, TTOT	<ul style="list-style-type: none"> <li>AODB/RMS</li> <li>Manual input in A-CDM Portal</li> </ul>	Optional
<b>MS12 Aircraft Ready</b>	<ul style="list-style-type: none"> <li>Post analysis to measure aircraft readiness against the TOBT</li> <li>Automate removal of TOBT and TSAT based if rules are not followed based on local procedures</li> </ul>	<p>The call from the pilot to ATC to report ready within “X3” minutes of TOBT</p> <p>Note: The value of “X3” is based on local procedures. “X3” is highly recommended to be +/-5 minutes</p>	Actual Ready Time (ARDT)	Re-calculate: - Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, ARDT, TSAT, TTOT	<p>Manual input in</p> <ul style="list-style-type: none"> <li>Electronic Flight Strip System</li> <li>A-CDM portal/HMI</li> </ul>	Optional
<b>MS13 Start Up Request</b>	<ul style="list-style-type: none"> <li>To measure pilot’s adherence to TSAT.</li> <li>Automate removal of TOBT and TSAT based if rules are not followed based on local procedures</li> </ul>	<p>The call from the pilot to ATC to request pushback/start-up clearance within “X4” minutes of TSAT.</p> <p>Note: The value of “X4” is based on local procedures. “X4” is highly recommended to be +/-5 minutes</p>	Actual Start up Request Time (ASRT)	Re-calculate: - Present/Disseminate : ALDT, AIBT, EOBT, SOBT, TOBT, ARDT, ASRT, TSAT, TTOT	<p>Manual input in</p> <ul style="list-style-type: none"> <li>Electronic Flight Strip System</li> <li>A-CDM portal/HMI</li> </ul>	Optional
<b>MS14 Start Up Approved</b>	<ul style="list-style-type: none"> <li>To measure ATC’s adherence to TSAT</li> <li>Automate removal of TOBT and TSAT</li> </ul>	The call from ATC to pilot to give clearance for push and start	Actual Start up Approve Time (ASAT)	Re-calculate: - Present/Disseminate : ALDT, AIBT, EOBT, SOBT,	<p>Manual input in</p> <ul style="list-style-type: none"> <li>Electronic Flight Strip System</li> <li>A-CDM portal/HMI</li> </ul>	Optional
<b>Milestone</b>	<b>Purpose of the Milestone</b>	<b>Milestone is triggered by</b>	<b>Data Elements</b>	<b>A-CDM Actions</b>	<b>Example of system(s) that typically has this data (and should share it)</b>	<b>Required/ Optional</b>

---

A-CDM Implementation Guide| APIRG

	based if rules are not followed based on local procedures	clearance within “X5” minutes of TSAT.  Note: The value of “X5” is based on local procedures. “X5” is highly recommended to be +/-5 minutes		TOBT, ARDT, , ASRT, TSAT, ASAT, TTOT		
<b>MS15 Off Block</b>	<ul style="list-style-type: none"> <li>To check if the aircraft has gone off blocks as per TSAT</li> <li>Update Target Take Off Time (TTOT) generated by DMAN/PDS if required</li> </ul>	Aircraft commence pushback	Actual Off Block Time (AOBT)	Re-calculate: TTOT Present/Disseminate : ALDT, AIBT, EOBT, SOBT, AOBT, TTOT	<ul style="list-style-type: none"> <li>A-SMGCS</li> <li>Docking System</li> <li>ACARS</li> <li>Manual input</li> </ul>	Required
<b>MS16 Take Off</b>	<ul style="list-style-type: none"> <li>End of A-CDM process and relevant stakeholders are updated with the take-off information.</li> <li>Flight is removed from the A-CDM process</li> </ul>	Aircraft lift-off the runway	Actual Take Off Time (ATOT)	Re-calculate: - Present/Disseminate : ALDT, AIBT, EOBT, SOBT, AOBT, ATOT	<ul style="list-style-type: none"> <li>A-SMGCS</li> <li>ACARS</li> </ul>	Required

---

### 3.8 A-CDM Performance Indicators

3.8.1 In order to measure A-CDM performance, the post-implementation performance needs to be compared against the same performance indicators that were utilised before implementation.

3.8.2 Measurement of A-CDM performance is an iterative process and the feedback mechanism is an integral part of it.

3.8.3 Measurement of A-CDM performance can be better realized based on commonly agreed indicators.

3.8.4 Table 3-3 below provides examples of A-CDM performance indicators for reference.

Table 3-3 – Examples of A-CDM Performance Indicators

Strategic Performance Indicator	Performance Driver	Performance Indicator	Performance Measurement	Milestone Measurement	Stakeholders
1) Improve punctuality and reduce delays	Turnaround punctuality	Turnaround compliance	<ul style="list-style-type: none"> <li>➤ (ARDT - AIBT) - MTTT &gt; or = 5 minutes (%)</li> <li>➤ (ARDT - AIBT) - (SOBT - SIBT) &gt; or = 5 minutes (%)</li> <li>➤ AOBT - ARDT &gt; or = 5 minutes (%)</li> </ul>		Aircraft Operator Airport
	Arrival punctuality (GANP KPI 14)	In Block Time accuracy	<ul style="list-style-type: none"> <li>➤ ALDT - ELDT (minutes)</li> <li>➤ ALDT - ELDT &gt; or = 5 minutes (%)</li> <li>➤ AIBT - SIBT &gt; or = 15 minutes (%)</li> <li>➤ AIBT - EIBT (minutes)</li> <li>➤ AXIT - EXIT (minutes)</li> <li>➤ # of missed approaches, go around per day per RWY (Include explicit times for the missed approaches for each runway)</li> </ul>	@ Milestones 3, 4 and 5 @ Milestones 3, 4 and 5  @ Milestones 3, 4, 5 and 6 @ Milestones 3, 4, 5 and 6	Aircraft Operator Airport

Strategic Performance Indicator	Performance Driver	Performance Indicator	Performance Measurement	Milestone Measurement	Stakeholders
	Departure punctuality (GANP KPI 01)	<ul style="list-style-type: none"> <li>➤ Off Block accuracy (lag)</li> <li>➤ Reduce departure delays</li> </ul>	<ul style="list-style-type: none"> <li>➤ AOBT - SOBT &gt; or = 15 minutes (%)</li> <li>➤ ATOT - TTOT &gt; or = 5 minutes (%)</li> <li>➤ Measure delay @ AOBT-SOBT (minutes)</li> <li>➤ AXOT - EXOT (minutes)</li> </ul>	@ Milestones 4,5,6,7,9,10,12,13,14,15 @ Milestones 4,5,6,7,9,10,12,13,14,15	Aircraft Operator Airport ATFM
	Reduce taxi out delay in minutes (GANP KPI 02)	<ul style="list-style-type: none"> <li>➤ Average taxi out time in minutes across a 12-month period</li> <li>➤ Taxi-out time against benefit baseline (lead)</li> <li>➤ Taxi-out time accuracy (lag)</li> </ul>	<ul style="list-style-type: none"> <li>➤ Taxi-out delay (minutes) to benefit baseline (minutes and fuel)</li> <li>➤ Average (ATOT – AOBT) – benefit baseline (minutes)</li> <li>➤ Taxi Out Time delay converted to fuel consumption on a flight by flight basis based on # engines and engine type</li> </ul>	@ Milestone 15	ATC Aircraft Operator Airport
2) Optimise Airport Infrastructure	Improvement in the gate/bay/stand Utilisation % Time	Overall gate/bay/stand actual occupation time	<ul style="list-style-type: none"> <li>➤ Compare the overall actual gate/bay/stand occupation time with scheduled gate/bay/stand occupation time (minutes deviation) per flight</li> <li>➤ Measure ARDT - AIBT per gate/bay/stand per flight by aircraft type</li> </ul>	N/A	Airport Aircraft Operators
	Improvement in the gate/bay/stand Utilisation % Usage	<ul style="list-style-type: none"> <li>➤ Gate/bay/stand usage</li> <li>➤ Assess gate/bay/stand delay (lag)</li> </ul>	<ul style="list-style-type: none"> <li>➤ Measure # of turns (rotations) on each gate/bay/stand per day by Aircraft type</li> <li>➤ AOBT - SOBT (minutes)</li> <li>➤ AOBT - SOBT &gt; or = 15 minutes (%)</li> <li>➤ Average TSAT – TOBT &gt; or = 15 minutes (%)</li> </ul>	@ Milestones 9, 10, 12, 13, 14, 15	Airports

Strategic Performance Indicator	Performance Driver	Performance Indicator	Performance Measurement	Milestone Measurement	Stakeholders
3) Gate /Bay / Stand Management	Reduce the number of late gate/bay/stand changes (e.g. 10 minutes before ALDT) <b>(GANP KPI 13)</b>	<ul style="list-style-type: none"> <li>➤ Gate/bay/stand allocation and passenger gate/bay/stand freezing time (lag)</li> <li>➤ Gate/bay/stand allocation accuracy (lag)</li> <li>➤ Gate/bay/stand/bay conflicts (lag)</li> </ul>	<ul style="list-style-type: none"> <li>➤ # of late gate/bay/stand changes within [(ALDT- 10 min) to ALDT] Number of gate/bay/stand changes after landing [ALDT to AIBT]</li> <li>➤ # of bay conflicts per day</li> </ul>	@ Milestones 4, 5, 6, 7	Airports
4) Strategic Slot Management	Increase the # of flights that meet strategic slot compliance <b>(GANP KPI 03)</b>	Airport strategic slot adherence	<ul style="list-style-type: none"> <li>➤ AIBT - SIBT -/+ 30 minutes (%)</li> <li>➤ AOBT- SOBT -/+ 30 minutes (%)</li> </ul>	N/A	Aircraft Operators Airports
5) Reduce emissions	Reduce emission from engines on ground <b>(GANP KPI 16)</b>	Emission from engines on ground (lead)	<ul style="list-style-type: none"> <li>➤ Taxi-out delay (minutes) to benefit baseline (minutes and Co2)</li> </ul>	N/A	ATC Aircraft Operators Airports
6) Congestion	Reduce number of aircraft moving simultaneously on the manoeuvring area	<ul style="list-style-type: none"> <li>➤ Number of aircraft queueing on sequence in high demand periods</li> </ul>	<ul style="list-style-type: none"> <li>➤ Queue length (ATOT-AOBT) over a 15 min period, per hour over a 24-hour period</li> </ul>	N/A	ATC Aircraft Operators Airports
7) ATFM Slot adherence	Increase ATFM slot adherence <b>(GANP KPI 03)</b>	Number of aircraft compliant with ATFM slot (CTOT)	<ul style="list-style-type: none"> <li>➤ ATOT – CTOT</li> </ul>	@ Milestone 16	



## 4. Chapter 4 - Interoperability of A-CDM with other systems

### 4.1 Interactions between A-CDM and Other Systems

4.1.1 In the global aviation network, each airport is a node serving other aviation entities to achieve the safe, secure and efficient interoperability of ATM systems as a whole. The ASBU framework underpins and realizes such principle with a systems engineering approach to set the target implementation for sets of operational improvements, referred to as ‘modules’, including A-CDM, Air Traffic Flow Management (ATFM), and various enablers of ATM efficiency and effectiveness.

4.1.2 Airport collaborative decision-making is address in the ASBU framework in the Operational thread. It is composed of 4 modules and 6 elements, not to be confused with the “6 elements” of A-CDM implementation as per EUROCONTROL Guidance, with inclusion of TAM and integration in TBO.

4.1.3 As per the Sixth Edition of ICAO Global Air Navigation Plan, A-CDM; ASBU Elements are:

- **ACDM-B0/1** Airport CDM Information Sharing (ACIS)
- **ACDM-B0/2** Integration with ATM Network function
- **ACDM-B1/1** Airport Operations Plan (AOP)
- **ACDM-B1/2** Airport Operations Centre (APOC)
- **ACDM-B2/1** Total Airport Management (TAM)
- **ACDM-B3/1** Full integration of ACDM and TAM in TBO

4.1.4 To achieve the aims of subsequent ASBU A-CDM elements (B1 onwards), the implementation phase of B0/1-ACDM should be ideally interoperable-by-design that A-CDM is not only a local system serving an airport but also a node with adequate capabilities and features for integration with domestic air traffic flow management and interoperability with other systems of the cross-border (international) air space.

4.1.5 A network in its basic form is between two nodes, meaning that even a connection between two airports, for example a hub airport and its main “feeder” airport, or between an airport and its national ATFM unit, needs to consider the systems and interactions needed to ensure the right communications and future interoperability. This needs to consider not only technological (IT) elements, such as the type of connectors, interfaces, information exchange models, but also compatible procedures and a **common vocabulary**.

4.1.6 To effectively formulate and develop the A-CDM implementation phase, the following ABSU modules and elements, as well as their interactions with A-CDM, should be studied in depth and incorporated gradually into an A-CDM implementation:

- (a) Air Traffic Flow Management (ATFM) under B0-NOPS.
  - (b) Runway sequencing (RSEQ) under B0-RSEQ
-

- (c) Surface operations (SURF) under B0-SURF
- (d) Meteorology under B0-AMET
- (e) System Wide Information Management (SWIM) under B2-SWIM.
- (f) Flight Information Exchange Model (FIXM) under B2-SWIM.
- (g) ATS Message Handling System (AMSH) under COMI-B0

4.1.7 More information about the ASBU modules and elements interacting with A-CDM are available from the ICAO GANP website at <https://www4.icao.int/ganpportal/>

## **4.2 Project Framework for A-CDM Integration/Interoperation with ATFM Systems**

4.2.1 In line with ICAOs ASBU timeframe, the outcomes from Block-0 implementations of A-CDM and ATFM could be leveraged to ensure the interoperability of equipment, procedures and practices among the pioneering aviation authorities and administrations in the AFI Region. This will set the guidelines and successful templates for all aviation entities to join the roadmap.

4.2.2 A good practice for development and implementation of A-CDM initiatives should:

- (a) Utilize ATFM measures e.g. CTOT from ATFM and various milestones from ACDM-B0 to collectively improve the efficiency and effectiveness of air traffic services and airport operations;
  - (b) Consider the procedures in place in order to integrate with them
  - (c) Consider current ATFM communication capabilities and incorporate those to A-CDM implementations so that A-CDM is capable of obtaining information from ATFM and, on the other hand, sending information to ATFM. AMHS interfaces must be considered initially (as is the current communication scheme of most ATFM units and ATC centers) with the consideration to also enable FIXM interconnections, as FIXM will, in the future, take over teletype based communications.
  - (d) Contribute to regional and sub-regional efforts for the standardisation of flight and flow data, as well as the development of Implementation Guidelines and Interface Control Documents for subsequent Implementations;
  - (e) Collaborate among stakeholders on development aligning with ACDM-B0/2 module's aim for integration of A-CDM with ATFM;
  - (f) Leverage the solid foundation established from ACDM-B0 and NOPS-B0 modules and take A-CDM into consideration when developing ATFM techniques and algorithms for network operations in multi-nodal and/or harmonised settings;
-

- (g) Explore the performance improvement through the application of REDDIG infrastructure and SWIM for regional FIXM information exchange models to pave the way for the acquisition of future full data-driven ATFM and A-CDM facilities;
- (h) Realise the potential of AIDX initially and then FIXM for richer content exchanges, between automated systems of A-CDM airports and the A-CDM and ATFM network in the AFI region, respectively; and
- (i) Establish the systems engineering plan that holistically covers conceptualisation, development, acquisition and implementation of the above mentioned initiatives and trials to bring fruitful outcomes to aviation users of the systems.

4.2.3 Beyond the document-based interoperability of equipment interfaces, **regional and/or sub-regional coordination** should be made to develop model-based interfaces for computerisation between A-CDM, ATFM and ATC systems, with the following steps:

- (a) Make agreements between the A-CDM and ATFM communities on the choice of ‘**Milestones**’ for developing interoperable procedures between A-CDM and ATFM.
- (b) Compromise the ‘**Compliance**’ of flights meeting both A-CDM milestones and ATFM measures.
- (c) Develop and materialise Concept of Operations (CONOPS) for Interoperability between A-CDM and ATFM processes.
- (d) Identify data items and the ‘Timeline’ of their exchanges needed to realise the CONOPS and develop the common operating procedures for processing and utilizing the data items.
- (e) Research and develop model-based ‘**Interfaces**’ to enable the automation of data processing and information utilization.
- (f) Develop and implement operational trial projects to verify and validate the interoperable elements and components.
- (g) Articulate the outcomes of trial to develop reference models with reusable elements and components to minimise the redesign efforts of Members.
- (h) Complete formal adoption of the reference models e.g. FIXM Extension into the ICAO documents.

Instead of a *big bang* implementation, the steps suggested above should be performed in an iterative manner, via forums and working groups among experts from members of the AFI Region. The incremental approach has to bridge in-depth studies of integration/interoperation between A-CDM and ATFM, as well as to foster close liaison for developing A-CDM and ATFM network operations in a more collaborative manner.

---



## 5. Chapter 5 - Training

### 5.1 Who

5.1.1 All partners who are active, both within the implementation project and whose work directly involves Airport CDM, should receive in depth training. This is because it involves a new way of working with, quite possibly, new procedures and processes.

5.1.2 Specifically operational staff of ANSPs, airports, airlines and ground handlers should be trained. It may also be of interest to anyone from other organisations involved in the implementation of ACDM activities.

5.1.3 It is also advisable to provide some level of training to the IT and implementation team, so that they can fully understand the concept prior to the project start.

### 5.2 What

5.2.1 The course should cover the concept elements and how to apply the various techniques of A-CDM in relation to the different partners' operations.

5.2.2 The dedicated modules should focus on the role, tasks and responsibilities of each CDM partner.

5.2.3 It should be highlighted the **information sharing module** that shows how effectively shared information can benefit operational decisions of the various partners.

### 5.3 When

5.3.1 The training phases should be scheduled within the project plan. Awareness programs should be started in the early stages of implementation but it is advisable to plan the main training sessions near to the project completion, this to avoid the need for refresher training if training is conducted too early.

### 5.4 How

5.4.1 Instructors should be fully trained on the Airport CDM concept. Various methods for training can be utilized, however it is important that all relevant personnel are fully trained.

5.4.2 It is advisable that other staff receives at least an awareness program to increase and promote the A-CDM.

5.4.3 Courses should be organised, preferably in a mixed partner environment, to have staff from several operational airport partners in one room, discussing new procedures and viewing the problems that occur during the many activities in the turn-round of an aircraft and solutions offered by Airport CDM

---

5.4.4 Self-teach or internet based training can also be considered but this should not be considered as the only training required. If it is developed, then is probably best to developed interactive training material, with specific modules for each partner. This approach can save expensive training time and be considered as refresher training.

## **5.5                    Continuance**

5.5.1 Recurrent and refresher training sessions should be planned as standard, whether to cover enhancements within the A CDM processes, for new staff or ones who have changed roles.

## APPENDICES

### Appendix A – Relationships between A-CDM and ASBU Modules

#### Introduction

1. This appendix supplements and references information regarding the 6<sup>th</sup> Edition of the Global Air Navigation Plan (GANP) available at <https://www4.icao.int/ganpportal/>

#### *A-CDM in the Global Aviation Network*

2. In the global aviation network, each airport is a node serving other aviation entities to achieve the safe, secure and efficient interoperability of Air Traffic Management (ATM) systems as a whole. The ASBU framework underpins and realizes such principle with a systems engineering approach to set the target implementation time frames for sets of operational improvements, referred to as ‘modules’, including Airport Collaborative Decision Making (A-CDM), Air Traffic Flow Management (ATFM), and various enablers of ATM efficiency and effectiveness.
3. The ASBU elements were defined in previous versions of the GANP in an inconsistent manner. An ASBU element is a specific change in operations designed to improve the performance of the air navigation system under specified operational conditions.
4. The ASBU enablers are a new concept in the updated ASBU framework (GANP 6<sup>th</sup> Edition, 2019). They are the components (standards, procedures, training, technology, etc.) required to implement an element. Some of the enablers can be elements in other threads, for instance: avionics or ground systems in the technology threads.
5. The ASBU threads already existed in previous versions of the GANP and they were key feature areas of the air navigation system where improvements are needed in order to achieve the vision outlined in the Global ATM Operational Concept.

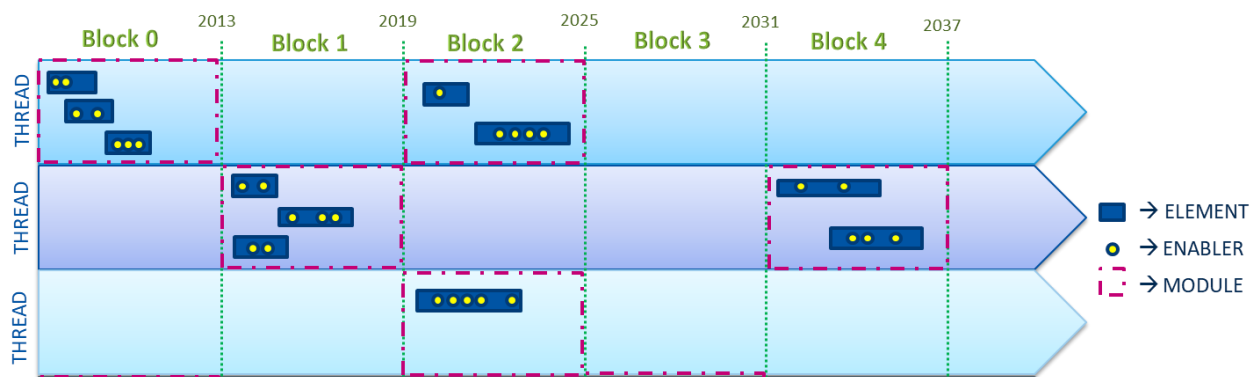


Figure A-1: Aviation System Block Upgrades (ASBU) Framework

6. The ASBU threads have been categorized in 3 groups: **OPERATIONAL THREADS**

(ACDM, APTA, NOPS...), **INFORMATION** threads (SWIM, AMET, DAIM, FICE) and **TECHNOLOGY** threads (COMS, COMI, NAVS, ASUR)

7. The ASBU modules already existed in previous versions of the GANP and they are the crossing point between the threads and the blocks. Therefore, an ASBU module is the group of elements from a thread that, according to the enablers' roadmap, will be available for implementation within the defined deadline established by the ASBU Block.
8. An ASBU Block is the end date of a six years' timeframe that defines a deadline for an **element to be available for implementation**. This implies, that the element and all the enablers associated to it, need to be available for implementation by the ASBU block year.
9. Airport collaborative decision-making is addressed in the ASBU framework in the Operational thread. It is composed of 4 modules and 6 elements, with inclusion of TAM and integration in TBO. The previous version of the GANP included 2 modules.
10. Collaborative airport decision making is addressed within the ASBU framework in the **OPERATIONAL** thread. It is made up of 4 modules and 6 elements, including TAM and integration in TBO. The previous version of the GANP included 2 modules.
11. A-CDM ASBU Elements:
  - **ACDM-B0/1** Airport CDM Information Sharing (ACIS)
  - **ACDM-B0/2** Integration with ATM Network function
  - **ACDM-B1/1** Airport Operations Plan (AOP)
  - **ACDM-B1/2** Airport Operations Centre (APOC)
  - **ACDM-B2/1** Total Airport Management (TAM)
  - **ACDM-B3/1** Full integration of ACDM and TAM in TBO
12. According to the ICAO GANP portal, the Concept of Operations of A-CDM by Block is described as:

<b>Block</b>	<b>Description</b>
<i>Baseline</i>	All stakeholders involved in aerodrome operations have their own processes that are conducted as efficiently as possible. However, there is not enough effective information sharing among them. Some basic coordination between ATC and ramp control (which may also be provided by ATC) exists. The aerodromes operate in isolation from the ATM network and aircraft operators manage their operations independently from each other.
<i>Block 0</i>	Aerodrome operators, aircraft operators, air traffic controllers, ground handling agents, pilots and air traffic flow managers share live information that may be dynamic, in order to make better and coordinated decisions. This applies notably in day to day operations and also in case of severe weather conditions or in case of emergencies of all kinds; for these cases A-CDM procedures are referred to in the snow plan, the aerodrome emergency response plan and the aerodrome manual. In some cases, aerodromes are connected to the ATM network via the ATFM function or to ATC through data exchange.



<i>Block 1</i>	Aerodromes are integrated within the ATM Network, from the strategic through all tactical phases. Situational awareness and decision support information is made available to affected stakeholders to establish a common understanding of the various needs and capabilities and make adjustments to assets in order to cope with these needs. Support mechanisms include an Airport Operations Planning (AOP) and an Airport Operations Centre (APOC).
<i>Block 2</i>	Planning and management of airport operations is enhanced through Total Airport Management (TAM), meaning that passenger terminal management is fully integrated with “traditional” A-CDM in order to optimise aerodrome operations and passenger management. Tools and decision support information supporting landside management are made available and interfaced with Airport Operations Centre.
<i>Block 3</i>	All stakeholders are fully connected. All tactical decisions are synchronized and operations are managed by trajectory. All ground processes including aircraft turnaround operations and the landside processes are agreed on the en-route to en-route view of flight operations. Expected ground event times are managed with known impacts to the ATM system, to ensure that the agreed trajectory is consistent with the Airport Operations Plan.

#### *A-CDM with Air Traffic Flow Management (ATFM)*

13. According to the ICAO Standards and Recommended Practices (SARPs) Annex 11 Chapter 1: “*ATFM has the objective of ATFM contributing to a safe, orderly and expeditious flow of air traffic by ensuring the air traffic control capacity is utilized to the maximum extent possible, and that the traffic volume is compatible with the capacities declared by the appropriate Air Traffic Services authority.*”

14. Building up from B0-NOPS Network Operations, ATFM is used to manage the flow of traffic in a way that minimizes delays and maximizes the use of the entire airspace. Collaborative ATFM can regulate traffic flows involving departure slots, smooth flows and manage rates of entry into airspace along traffic axes, manage arrival time at waypoints or flight information region (FIR)/sector boundaries and reroute traffic to avoid saturated areas.

15. With the improvements under B1-NOPS, ATFM can be integrated with airspace organization and management (AOM) to accommodate the use of free routings. The ATFM algorithms and techniques can be enhanced to:

- (a) regulate traffic flows involving departure slots, smooth flows and
- (b) manage rates of entry into airspace along traffic axes,
- (c) manage arrival time at waypoints, flight information region or sector boundaries,
- (d) reroute traffic to avoid saturated areas, and
- (e) address system disruptions including crisis caused by human or natural phenomena.

16. According to the ICAO Manual on Collaborative Air Traffic Flow Management (Doc 9971), it is a general rule that “ATFM is needed whenever airspace users are faced with constraints on their operations, and in areas where traffic flows are significant”.

17. However, as limited by the current capabilities of most ATFM facilities, the ATFM process is commonly applied to regulate traffic flows (or balance demand of airspace users) by means of a ground delay program, level capping, an airspace flow program, minimum departure, miles in trial, minutes in trial, etc. Some of these ATFM measures may counteract the benefits of the A-CDM turnaround process. In the worst case, the passengers are delayed inside the fuselage, the aircraft has been off-block to taxiway or is airborne amid ‘flow control’.
18. In a nut shell, when delays of flight operations cannot be avoided, collaborative decisions must be made orderly and timely to balance the impacts on airports and airspaces for the sake of all aviation entities and stakeholders in an open and fair manner, reflecting data for the full trajectory of a flight.
19. As mentioned in Doc9971, A-CDM aims to improve the exchange of information among actors and stakeholders and therefore to improve local operations. However, it is also a key enabler in linking these operations to the ATM network.
20. While ATFM is not a prerequisite to the realization of A-CDM, it is evident that any form of ATFM (or network operations/management) will benefit from being connected to A-CDM. Operations conducted at a CDM airport will be enriched by enhanced arrival information from the ATM network. Network operations will also benefit from more accurate departure information from CDM airports
21. For countries or regions without ATFM services, A-CDM could be the enabler to connect adjacent ATC units or other airports.

*A-CDM and the “System Wide Information Management” or SWIM*

22. System Wide Information Management (SWIM) is a new way for managing and exchanging information. It replaces the current ground-ground point-to-point information exchange by an aviation intranet relying on internet technologies enabling information services to be provided to the ATM community. In order to facilitate publish/subscribe and request/reply based information exchange through standardised information services, provisions for the information service content and service overview are defined and appropriate SWIM governance established.
23. SWIM is expected to enable node-based A-CDM sharing up-to-date relevant information with other aviation entities including other airports, airlines, domestic, cross-border and regional ATFM units so that the preferences, available resources and the requirements of the stakeholders at the airport can be taken into account with a process of collaborative decision-making (CDM) by all parties concerned. The implementation of system-wide information management (SWIM) services provides the infrastructure and essential applications based on standard data models and internet-based protocols to maximize interoperability when interfacing systems for A-CDM, ATFM and other ATM functions.
24. SWIM’s goal is to create a global network of ATM nodes, including the aircraft, providing or using information. Aircraft operators with operational control centre facilities will share information while the individual user will be able to do the same using other applications. The support provided by the ATM network will in all cases be tailored to the needs of the user concerned, e.g. A-CDM and ATFM.

There is a need of implementation of an APIRG Region Digital Network within swim to enables a cross-border, high-speed and secured communication network, which serves as a key enabler for implementation of a number of seamless ATM initiatives *A-CDM with Cross-Exchange of Structured Information* .

---

25. The ASBU module, B1-DATM Digital ATM information, addresses the need for information integration and supports a new concept of ATM information exchange fostering access via the SWIM services. This includes the cross-exchange of common elements with the initial introduction of the ATM Information Reference Model (AIRM), which integrates and consolidates ATM information in a transversal way. Key exchange models include:

- (a) Flight Information Exchange Model (FIXM) for flight and flow information and aircraft performance-related data,
- (b) ICAO Meteorological Information Exchange Model (IWXXM) for information related to weather, and
- (c) Aeronautical Information Exchange Model (AIXM) for digital format of the aeronautical information that is in the scope of Aeronautical Information Services (AIS) in accordance with the ICAO SARPs Annex 15.

26. The data interoperability between A-CDM and ATFM may be assured by the use of FIXM found on the concept of flight object and the widely adopted extensible Mark-up Language (XML). This common model of structured information for flight object will effectively enable ground-ground exchanges before departure, under the ASBU module, B1-FICE.

---

## Appendix B – Use Cases for Interoperability of A-CDM with Other Systems

### *Introduction*

1. This appendix provides use cases to highlight ways that A-CDM can be implemented as a local system serving an airport as well as a node with adequate interfacing capabilities for integration and interoperation with air traffic flow management (ATFM) and other systems of the cross-border net-centric airspace.
2. In the context of System Wide Information Management (SWIM), “interoperability” means the ability of information and communication technology (ICT) systems and of the business processes they support to exchange data and **to enable the sharing of information and knowledge**. The interoperability of A-CDM can range from close integration of specialized computer systems in-and-around an airport implementation and loose coupling of service-based automation systems in a regional net-centric airspace.
3. To achieve effective and efficient sharing of information, a user interface is needed to allow quick and easy viewing and input of information taking into consideration heavy airport and air traffic control (ATC) workload scenarios.
4. To facilitate automated interactions, a system interface is needed to demark a shared boundary across which two or more of these different systems and their software applications to communicate, exchange data, and use the information that has been exchanged.
5. The interfacing capability of an A-CDM implementation can be categorized by the following use cases and options according to their integration degree and interoperability spectrum.

### **Use Case 1 - Interfaces of Stand-alone A-CDM Platform**

6. In an operation without A-CDM, information about key airside processes is typically sourced from multiple different systems leading to gaps and inefficiencies. With A-CDM, a common platform collates data from the airport and ATC systems and presents it to operational stakeholders in a format that helps them make more informed decisions.
  7. In general, an **A-CDM web portal** can be used as a specially designed website that brings information from diverse sources in a uniform way so that stakeholders will access information about the key airside processes through the web portal. It is then incumbent on the stakeholders themselves to update their plans, resourcing decisions and working practices to make best use of the information and optimize performance accordingly.
  8. The web portal essentially facilitates a common milestone process that corresponds to significant events across each of the airside processes to enable and ensure a level of consistency across the airport and its airside entities that are adopting an A-CDM information sharing function. The successful completion of each milestone triggers operational decisions for stakeholders concerned with future events in the process.
  9. In addition to the web portal as a user interface, an A-CDM platform may offer an application programming interface (API) for other systems to automatically receive and send A-CDM
-

information. These system interfaces may have an inter-system messaging capability based on proprietary communications protocols or various de facto engineering standards.

10. Through its system interfaces, an A-CDM platform can extract process-information about airport and flight operations. Then, the A-CDM algorithms can combine and evaluate the information collected. With both the user and system interfaces, the A-CDM will share the updated information and milestones (including pre-departure sequence and related estimated times) to optimize the flow of outbound traffic.
11. Options of interfacing automated systems for A-CDM may include:
  - (a) Dedicated data links may be used between the A-CDM platform and each of its partnering systems for conveying milestones and messaging on one-to-one basis.
  - (b) The A-CDM platform may be connected to the Aeronautical Fixed Telecommunication Network (AFTN) to share information with destination airports, air traffic control units, air traffic flow management units and the wider air transport network.
  - (c) A cloud-based solution may be used to enable economies of scale by providing a common platform to multiple airports as a single A-CDM implementation and link the A-CDM implementation to other systems with a great range of interoperability allowing access by service-oriented APIs, web service, and the like based on open standards and industry good practices.
12. The deployment of a standalone A-CDM platform can reduce the exposure of existing critical systems like the Airport Operations Database (AODB) and Flight Data Processing System (FDPS) to the risks of corruption when introducing the new A-CDM. Moreover, existing systems can continue to follow their specific roadmaps for upgrade or replacement with minimum dependencies on the evolving A-CDM functions.
13. However, the lack of network-wide interoperability cannot automatically validate information in multiple disparate systems, while manual cross-checks are required to identify and resolve discrepancies on each system concerned. With more systems interacting with a standalone A-CDM implementation, the risks of errors and delays in the net-centric CDM process will be increased.

#### **Use Case 2 - Net-centric Interfaces of A-CDM**

14. Under the initiatives of Aviation System Block Upgrades (ASBU), SWIM suggests the use of service-oriented architecture (SOA) to realize the concept of information-centric and net-centric air traffic management (ATM) operations. As one of the prime objectives of net-centric CDM, airport integration with ATFM Unit shares more precise and detailed information about airside processes and an optimized departure sequence by taking into account both aerodrome and airspace slots as well as other prevailing operational circumstances such as weather changes and military aviation activities.
  15. Several options for network connectivity and system interoperability are available for interfacing A-CDM via ATFM into the global aviation network.
-

16. An A-CDM platform may connect to an ATFM Unit via a dedicated AFTN connection, but the interoperability between A-CDM and ATFM is constrained by the text-based communications characteristics of AFTN.
  17. An A-CDM platform may connect to an ATFM Unit via a peer-to-peer data link that can support internet protocol based (IP-based) communications according to the interface control document (ICD) agreed between the A-CDM platform and the ATFM Unit. The ATFM Unit will act as a broker or agency to optimize the flow of air traffic in and out the airports, which participate in the A-CDM platform. The interface between A-CDM and ATFM may use communication protocols, which are different from that of the global aviation network, so the ATFM Unit has to provide data conversion as well as align interactions between network actors.
  18. The Unified Modelling Language (UML), as a developmental modelling language, can be used to provide a standard way of visualizing the design of system interfaces for SWIM-enabled applications as well as showing the structure of the data to be exchanged.
  19. The use of the Flight Information exchange Model (FIXM), which is a UML model, will ensure both syntactic interoperability and semantic interoperability. Other models mapped to FIXM, such as IATA AIDM, may also be considered.
  20. For specifying data formats and communication protocols, extensible Mark-up Language (XML) or Structured Query Language (SQL) standards are among the tools of syntactic interoperability. These tools are also useful for lower-level data formats, such as ensuring alphabetical characters are stored in a same variation of ASCII or a Unicode format (for English or international text) in all the communicating systems including ATS Messaging System (AMHS).
  21. Beyond the ability of two or more computer systems to exchange information, semantic interoperability is the ability to ***automatically interpret*** the information exchanged meaningfully and accurately in order to produce useful outcomes as defined by the end users of both systems. To achieve semantic interoperability, both A-CDM and ATFM must refer to a ***common information exchange model***, such as FIXM. Based on unambiguously defined content in all information exchange requests, what is sent from donor/owner is the same as what is understood at the requester/receptor.
  22. Other open standards are expected to be applied at all levels of the SWIM framework, which includes the World Wide Web Consortium (W3C) specifications (World Wide Web Consortium (W3C), 2013), Unified Modelling Language (UML), and the standards for network layer exchange.
  23. An A-CDM platform may connect to an ATFM Unit or other A-CDM platform based on the implementation specifications of SWIM which may be defined on a local, sub-regional, regional and/or global scale conforming to open standards. The A-CDM milestones, together with process information for improving the milestones and related estimated times, are exchanged via the SWIM infrastructure based on information management standards. The seamless interoperable data exchange and services will benefit the global aviation network as a whole.
-

### **Use Case 3 - A-CDM Interfaces for Cross-border ATFM**

24. In practice, an A-CDM implementation should establish a roadmap for maintaining and improving its interfacing capability based on the most cost-effective solutions at the time to serve its users and stakeholders. A system-view approach with reference to the above options and the ICAO ASBU roadmap could be a reasonable choice.
25. Under the systems view, A-CDM can be implemented as a specific application of CDM in the airport environment and ATFM facilities are being developed in an ecosystem with a cross-border network of many advanced, legacy and aged systems that airports are physical nodes inside virtual ATFM nodes on the network.
26. A mature ATFM network should provide a platform for airport operators and air traffic management units to collaboratively apply the most effective and efficient ATFM measures with considerations of the A-CDM milestones in a timely manner. One example would be the use of Calculated Take-Off Time (CTOT) from BO-NOPS (ATFM) and various milestones from B0-ACDM e.g. Target Off Block Time (TOBT) and Target Start-up Approval Time (TSAT).
27. Targeting a common goal through the systems view, the systems engineering (an interdisciplinary field of engineering and engineering management) should be applied to holistically tackle both technical and operational complexities of A-CDM, in particular when A-CDM being involved in cross border ATFM. Data exchange schemes in compliance with FIXM and SWIM would be part of the practical solutions. Service orientation is a means for integration across diverse systems. Ultimately, the silo effect caused by islands of A-CDM and ATFM systems can be eliminated.
28. System-wide predictability and situation awareness of air traffic will be the results of ACDM and ATFM interoperation based on common data models, i.e. FIXM. In long run, the continuous improvement of predictability based on the concepts and tools of data analytics will not only be useful for planning, strategic and pre-tactical phases of AFTM, but also help accurate decision making for operations related to A-CDM and the tactical phase of ATFM. The roles and interactions for integrated A-CDM and ATFM is summarized in **Table A2-1**.

Table A2-1: A-CDM roles within the ATFM Operational Phases

	Planning	Strategic	Pre-Tactical	Tactical	Post-Ops
Time Frame	Continual	< 6 months > 1 day	1 day prior	Day of operations	Day After
ATFM Role	Strategic ATFM planning	Strategic DCB planning	AFTM Daily Coordination and Next Day Planning	Tactical ATFM	Post-Ops Analysis
ATC Role				Tactical ATC	
A-CDM Role			A-CDM Planning	A-CDM Operations	A-CDM Performance Analysis

29. With a view to delivering roles/functions both at the airport and in the network, SWIM-compliant “enterprise services” can be applied to organizing distributed resources into an integrated solution that breaks down information silos and maximizes business agility. The service-oriented nature of SWIM modularizes ICT resources, creating the loosely coupled business processes of A-CDM and ATFM that integrate information across net-centric systems.
30. Being mutually dependent, a well-designed service-oriented architecture critically relies on the availability of business process solutions that are relatively free from the constraints of the underlying ICT infrastructure, because this enables the greater agility that businesses are seeking.
31. An SWIM-enabled application provides end users with more accurate and comprehensive information and insight into processes. It also offers the flexibility to access the service in the most suitable form and presentation factor, whether through the web browser or through a rich client. Dynamic applications are what enable businesses to improve and automate manual tasks, reach a consistent view of customers and partner relations, and to orchestrate business processes that comply with internal mandates and external regulations.
32. Although SWIM is the external enabler entity of ATM and the benefits of SWIM arise from the end-user applications that make use of it and not SWIM itself, it can bring benefits by allowing end-user applications from the simple to the most complicated to make full use of the complete ATM data. For a simple start on local scale to interface an A-CDM platform with ATFM, existing infrastructures built on open standards can usually be reused without great changes, although some harmonization issues will need to be addressed.
33. To institute SWIM as “enterprise services”, systems engineering can help an A-CDM implementation to design and manage complex systems over their life cycles. The systems engineering process begins by discovering the real problems that need to be resolved, and identifying the most probable or highest impact failures that can occur – systems engineering involves finding solutions to these problems across the interdisciplinary domains of ATM. The outcome of such efforts will be an engineered system for integrated A-CDM and ATFM with a combination of SWIM-enabled components that work in synergy to collectively perform the net-centric CD
-



## **Appendix C - References**

1. Manual on Collaborative Air Traffic Flow Management (Doc 9971), Third Edition, 2018
2. Airport Collaborative Decision-Making: Optimisation through Collaboration, CANSO
3. IATA Recommendations for A-CDM Implementation

## **Appendix D – GANP 6<sup>th</sup> Edition A-CDM-B0/1**

Available at <https://www4.icao.int/ganpportal/ASBU>

---



# ICAO GANP PORTAL

## ASBU ELEMENTS

ACDM-B0/1

☒ Functional Description
 ☒ Enablers
 ☒ Deployment Applicability
 ☒ Performance Impact Assessment

### ACDM

ACDM-B0/1	Airport CDM Information Sharing (ACIS)	Operational
Main Purpose ?	To generate common situational awareness, which will foster improved decision making within aerodromes, by sharing relevant surface operations data among the local stakeholders involved in aerodrome operations.	
New Capabilities ?	Stakeholders will be able to collaborate and take actions towards the achievement of a set of defined milestones by being aware of the status of an individual flight measured against known target times and milestones.	
Description ?	This element represents the first collaboration step among stakeholders involved in aerodrome operations. It consists in the definition of common specific milestones for several flight events taking place during surface operations. The stakeholders involved have to, based on accurate operational data, achieve the agreed milestones.	
Maturity Level ?	Ready for implementation	
Human Factor Considerations	1. Does it imply a change in task by a user or affected others? No 2. Does it imply processing of new information by the user? Yes 3. Does it imply the use of new equipment? No 4. Does it imply a change to levels of automation? No	

## PLANNING LAYERS ?

Pre-tactical

Tactical-Pre ops

Tactical-During ops

## OPERATIONS ?

Taxi-out

Departure

Arrival

Taxi-in

Turn-around

## DEPENDENCIES AND RELATIONS ?

## Type of Dependencies

## ASBU Element

Relation-information need

AMET-B0/1 - Meteorological observations products

Relation-information need

AMET-B0/2 - Meteorological forecast and warning products

Relation-operational benefit

SURF-B0/2 - Comprehensive situational awareness of surface operations

## ENABLERS

Enabler Category	Enabler Type	Enabler Name	Description / References	Stakeholders	Year
Operational procedures	Operations	Surface operation milestones procedure	Reference: Manual on Collaborative Air Traffic Flow Management (ATFM) ICAO Doc 9971	Airport operator ANSP Aircraft operator Ground handling agent	2013
Ground system infrastructure	Airport systems	ACIS system	A simple A-CDM dialog system to a more advanced A-CDM Information sharing platform (ACISP) to achieve A-CDM information sharing.	Airport operator ANSP Aircraft operator Ground handling agent	2013
Training	-	Training requirements for ACIS	Training in the operational standards and procedures	Airport operator ANSP ATM network function Aircraft operator Ground handling agent	2013
Operational procedures	Phraseology	ACIS Phraseology	Phraseology for the implementation of ACIS. References: Procedures for Air Navigation Services-Air Traffic Management (Doc 4444)	ANSP Aircraft operator	2013

## DEPLOYMENT APPLICABILITY

**Operational conditions:**

This element is expected to bring benefits in complex or even simple but constrained airports. Collaborative decision-making by information sharing can highly facilitate coordination of common operational solutions in order to improve access and equity to ATM resources.

**Main intended benefits:**

Type	Operational description	Benefitting stakeholder(s)
Direct benefits	Efficiency of operations	Airport operator ANSP Aircraft operator
	Improve situational awareness of airport operator, aircraft operator and ANSP	Airport operator ANSP Aircraft operator
Indirect benefits	Increased safety	Airport operator ANSP Aircraft operator

## INTENDED PERFORMANCE IMPACT ON SPECIFIC KPAS AND KPIS

KPA	Focus Areas	Most specific performance objective(s) supported	KPI Impact	KPI
-----	-------------	--	------------	-----

## Appendix E – Feeder Airports concept

*Note: this appendix is under review as must not be considered as final.*

### *Purpose*

1. The purpose of this document is to describe a hub – feeder concept for Airports that wish to explore the possibilities of integrating into a pre-ACDM network. This document will describe the concept, the benefits, and proposed pre-requisites.

### *Scope*

2. The intended audience of this document is anybody who would like to know more about the integration of feeder Airports into a network.

### *Objectives*

3. The purpose of the Feeder concept is to allow a simple way of exchanging relevant and timely information between HUB & Feeder airports, thereby forming a network.

4. It could be used by feeder airports or smaller airports that have no plans to implement the Airport CDM Process.

### *The current situation – the problem*

5. Before take-off, the accuracy of the flight data available to destinations airports & the network is based upon the EOBT from the ICAO flight plan and an average taxi-time. It is well known that EOBTs in flight plans are not always updated and that the taxi-time and runway-in-use are not always adjusted to the operational situation. This can result in a reduced accuracy of traffic predictions for the destination airport, especially during periods when operations are difficult at the airport of departure.

6. Flights may suffer from take-off slots restrictions and updates after they started the pushback sequence or even taxiing. This can result in disturbing flight operations after the flight has received its departure clearance by late flight plan updates. This may result in extra workload within the Tower, APOC and extra delay for Aircraft Operators.

7. The destination airport will have no visibility on the true estimated arrival time of the flight and therefore its operational planning will be inefficient.

### *Hub- Feeder Airport Concept (Proposal)*

## **What is it?**

8. The best way for an airport to integrate into a network is to implement the Airport Collaborative Decision Making (A-CDM) process. However, airports that have no plans to implement the ACDM process for whatever reason but still wish to exchange data with hub airports may do so as a feeder

---

airport. Such an Airport may provide a reduced set updated flight information with a reduced set of advantages (compared to full CDM Airports).

9. A feeder airport can provide Target Take-Off-Time (TTOT) estimations, taking into account the local situation [i.e. actual off bloc time + actual taxi out time]. This would be available from the moment that the aircraft leaves the blocks.

*Benefits of becoming a feeder airport*

10. The Benefits for an airport to become a feeder airport are:
- Improved predictability
  - Improved collaborative culture
  - Facilitates migration to future full A-CDM without investing much resources as a full A-CDM implementation
11. The Benefits for the destination airport and network are:
- improved Traffic predictability in en-route ACCs,
  - improved flight plan consistency
  - improved situational awareness for AOs when the aircraft is at an outstation.
  - improved estimated landing time estimates for Airports of Destination (ADES)

*Pre-requisites for becoming a feeder airport*

a. Variable Taxi-Time or VTT:

It shall be possible to automatically calculate the taxi-time for every flight. The taxi-time shall at least be dependent on the runway-in-use but preferably also on the stand or parking position.

By automatic calculation it means that the platform or application being used should have that level of functionality. An example would be an airport with runway constraints in relation to the geographical surroundings and airport layout [i.e. apron vs runway and available taxiways].

In a case like this it is known that due to the proximity of the apron to the preferred departure runway a taxi of “XX” minutes is set for all flights.

It shall be possible to globally extend the taxi-time with a number of minutes to cover for operational circumstances (e.g. adverse conditions, closure of taxi-way, etc.) during which taxiing takes longer than normal.

The provided taxi-time shall have a pre-agreed accuracy.

b. Actual Off-Block event:

---

The Actual Off-Block Time event shall be available for all flights.

It could be passed by the Turnaround manager, automatically detected (by e.g. A-SMGCS or Docking Guidance Systems), ACARS generated (first O of OOOI). It would also be acceptable if this event is consistently recorded into the TWR system by the controller input, which is part of the operational procedures.

The off-block event shall be available with a pre-defined accuracy.

c. Return-to-Stand:

In cases where the aircraft has to return back to the stand (due e.g. a technical problem), it is important to inform the destination airport and network. This information is required to re-enable the acceptance of flight plan updates (e.g. DLA message).

For this reason, the Return-to-Stand shall be entered into the TWR system as part of the operational procedures.

d. Communication with destination airport/FMU:

The TWR shall be ready to accept calls/questions for individual flights from the destination airport/FMU, e.g. if an AO needs to file a DLA message after the flight has pushed back and the flight is taxiing.

Such calls will occur very infrequently but may be of great help in providing the best possible service to the Aircraft Operators.

e. Distribution of data.

The airport, usually the ATC TWR system, shall be able to transmit and receive messages via the AFTN network. If it is from an airport, then other means of communication could be used, i.e. telephone coordination, email, SITA messaging.

*Becoming a feeder airport*

a. Data exchange

For the data to be useful and meaningful the feeder airport should provide **AOBT, TTOT, ATOT and an updated estimated landing time**. This data can be initially taken from the airport daily schedules that make up the plan. As flights arrive and turn, the updated information should be recalculated and exchanged.

There is effort involved in updating data, unless there is an automated platform which could be as simple as a workable spreadsheet.

Data collection and inputs need to be considered as this will be the basis for the updated TTOT.

b. Issues & things to consider

---

A few issues to be aware of:

- The AO (airline) and Ground Handling Agent will possibly adjust their working practices for the filing of DLA or CHG messages. These shall always be filed before the off-block event.
- In a return-to-stand scenario, flight data updates should be considered. If the flight has an allocated slot, then provisions for this update must be made.
- Provisions of the procedures may be mentioned as an AIC or in the AIP. This is to make Operators at the airport aware of the above mentioned requirements.

#### *Integration of feeder airports*

The integration of an airport as a feeder is mainly done by an information exchange between the nominated unit (TWR or APOC) and the hub airport.

The minimum for information exchange could be anything from a simple meeting to a sophisticated automated solution. At this stage, that majority of exchanges are expected to take place via email [or other electronic means] or by voice.

It is based upon operational procedures, systems and data elements.

The availability of variable taxi-time estimations and accurate recording of the off-block event, result in an improved view on the expected traffic for the hub, airport and network, and all its users.

It starts at push-back approval and ends at take-off.

---



## **Appendix F - Generic MoU between partners and A-CDM stakeholders**

### **GENERIC MOU BETWEEN ASSOCIATES AND A-CDM STAKEHOLDERS**

#### **INTRODUCTION**

A-CDM involves a wide range of interactions between the various partners who are diverse in nature, both in terms of business interests and organizational characteristics. It is essential that their agreement to work together for the common good be summarized in a Memorandum of Understanding (MoU), to be signed and followed by all the partners.

This appendix contains a generic example of an A-CDM MoU which, when completed with the site specific details, can be used for a given A-CDM project. Use of this model is recommended, as it contains, or prompts for, all the information that has been shown to be essential for the smooth operation of an ACDM project.

This sample is designed to provide the framework of cooperation between airport partners. Cooperation between an airport and the network operations must also be based on an MoU, the model for which is available from the network operations.

#### **CONTENTS**

Project Description	Responsibilities of partners providing data
Objectives of the MoU	Confidentiality
Partners Obligations	Dispute resolution
Organization	Amendments
Costs	Signatures of contracting partners

\*\*\*

#### **Article 1 – Project Description**

1.1 Airport collaborative decision-making (A-CDM) is a concept which aims to improve the throughput of air traffic at airports. This will be achieved by providing all Contracting Partners with accurate, timely and relevant information, allowing better decisions to be made.

1.2 The objective of the project is to improve the aircraft turnaround process, ensuring the best possible use of airport infrastructure and resources to the benefit of all Contracting Partners.

#### **Article 2 - Objectives of the MoU**

This MoU has been signed by the Partners with the following primary aims:

- a. create a cooperative framework in which to implement A-CDM;
  - b. ensure technical mechanisms allowing for common information sharing;
  - c. implement procedures which increase traffic predictability;
-

- d. promote the exchange of information between the local A-CDM project and the network; and
- e. set up monitoring mechanisms in order to enable the evaluation of improvements and proposals for further optimization.

### **Article 3 - Obligations of Contracting partners**

The Contracting Partners accept the following obligations:

- a) ensure active participation in all levels and phases of the project as required;
- b) support the development/validation of all functional specifications;
- c) follow the agreed A-CDM operational procedures and rules; and
- d) share information under the agreed conditions and act on the shared information.

### **Article 4 - Organization**

The project structure specified below has been agreed:

- a) the steering group will consist of representatives from the Contracting Partners;
- b) the steering group will appoint the A-CDM project manager; and
- c) the terms of reference for the steering group, working group and subgroups, as appropriate, are in Attachment XX of this MoU.

### **Article 5 - Costs**

5.1 Costs associated with equipment or resources will be covered by the Partner concerned. This will also apply to any system adaptation or integration unless otherwise agreed.

5.2 Where an interface is required between Partners, each one will try to minimize the cost impact on the other. The provision and use of data to and by the Contracting Partners is free of charge.

5.3 Partners who are not signatories to this MoU wishing to access data may be allowed to do so with the agreement of the steering group. For using data under such a special dispensation, a charge is applicable as described in Attachment YY of this MoU. The charge can be avoided by becoming a signatory of the MoU.

### **Article 6 - Responsibilities of the Contracting Partners providing data**

6.1 The Contracting Partners shall:

- a) enter and maintain in the A-CDM database, the data for which they are responsible;
  - b) be responsible for the accuracy and timeliness of the data they enter and maintain in the A-CDM database;
  - c) participate in A-CDM data monitoring by using agreed key performance indicators (KPIs), perform a post-operational analysis and make results available to the other Contracting Partners; and
  - d) grant other Contracting Partners access to the data contained in the A-CDM database.
-

6.2 The detailed arrangements for the provision of data to the A-CDM database are the subject of service level agreements between the Contracting Partners.

### **Article 7 - Confidentiality**

7.1 The Contracting Partners shall keep confidential all information coming to their knowledge in the course of A-CDM operations relating to the business associations and transactions of the other Partners.

7.2 This includes technical or commercial arrangements, documents and materials a Partner may acquire while working under this MoU, provided however, that this obligation on a Contracting Partner shall not apply to knowledge or information which is in the public domain.

7.3 Contracting Partners shall keep confidential the substance of any report, test, recommendation, or advice which they have given to another Contracting Partner in connection with the A-CDM operation.

7.4 Contracting Partners may exchange information among themselves on the basis of service level agreements and with the network on the basis of agreements concluded on their behalf by [enter name of appointed representative].

(Section to be completed with provisions required/agreed locally.)

### **Article 8 - Dispute resolution**

(This section will be completed in accordance with the relevant provisions established locally)

### **Article 9 - Amendments**

Amendment proposals to this MoU, including termination, must be submitted in writing to the steering group at least ninety (90) days in advance, which will handle such proposals in accordance with the process described in its terms of reference.

### **Article 10 - Signatures of Contracting Partners**

The Contracting Partners hereby agree that this MOU shall be effective from [date].

**Printed names/signatures /titles**

-----