

**CAR/SAM PLANNING AND IMPLEMENTATION REGIONAL GROUP (GREPECAS)
MINUTE OF THE THIRD GREPECAS PROGRAMMES AND PROJECTS REVIEW COMMITTEE (PPRC)
VIRTUAL MEETING
(ePPRC/03)
16 – 17 August 2021**

List of Participants:

See **Appendix A.**

Agenda

See **Appendix B.**

Objective: Follow-up to CAR/SAM Planning and Implementation Regional Group (GREPECAS) activities – review of priority subjects on air navigation.

ICAO Documentation and Presentation by the NACC and SAM Regional Offices.

The documentation and presentations can be found in the following link, as listed in IP/01REV2:
<https://www.icao.int/NACC/Pages/meetings-2021-ppprc3.aspx>

Introduction

1. Mr. Melvin Cintron, Regional Director, ICAO NACC Regional Office and Secretary of GREPECAS, welcomed the participants and mentioned the great importance for GREPECAS and the CAR and SAM Regions States, of the review of programmes and projects, as well as the improvements on the implementation processes in all the air navigation fields of the ICAO Standards and Recommended Practices (SARPs), and the Global Air Navigation Plan (GANP) in the priorities of both regions. He especially emphasized that the global aviation sector is going through an unprecedented difficult time due to COVID-19.
2. The Chairperson of GREPECAS, Mr. Héctor Porcella (Dominican Republic), also welcomed the participants to the meeting and spoke about the review and update of the GREPECAS Projects as a support to the States concerning the implementation actions in the CAR/SAM Regions. He also emphasized the importance of the Programmes and Projects Review Committee (PPRC) for this purpose. Moreover, he indicated that the aviation sector is going through a difficult time due to COVID-19, and it is more important than ever, the cooperation to overcome this crisis together.
3. The Secretariat invited the PPRC Member States to evaluate the work of GREPECAS, to identify new implementation needs during the aviation recovery process in both regions, and to propose performance improvements and, if necessary, new projects and tasks to GREPECAS, which satisfy the requirements and needs of the new emerging technologies, focusing on the new priorities of the States. An special call was made to the Air Navigation Services (ANS) Project Coordinators on collaboration among the CAR/SAM air navigation fields, for a harmonized development, given that both Regional Offices are working closely to ensure that GREPECAS and Regional Aviation Safety Group–Pan America (RASG-PA) mandates are working properly, complying with ICAO Headquarters' requirements.

4. It was mentioned that GREPECAS should anticipate the requirements of new technologies, to better and proactively help the States of the CAR/SAM Regions, making greater efforts to maintain operations in both regions through a correct health management.

5. Finally, Mr. Héctor Porcella, Chairperson of GREPECAS, emphasized the importance of the review and update of the GREPECAS Projects, as support to the States on the implementation actions in the CAR/SAM Regions.

Discussion

Agenda Item 1: Adoption of the Provisional Agenda, Schedule and Working Method

1.1 The Secretariat submitted WP/01, which presented the Provisional Agenda and the Schedule for consideration. The Meeting had no objection in their approval

Agenda Item 2: Follow-up on GREPECAS Programmes and Projects

2.1 Reviewed GREPECAS Programmes and Projects

2.1.1 Under Agenda Item 2, the Secretariat presented under **WP/05** the final version of the Implementation Guide of Airport Collaborative Decision Making (A-CDM) for the CAR/SAM Regions as part of the activities of the GREPECAS F3 Project, approved in the last CRPP/05 Meeting. This version was adjusted to take into account both regions, in view that the last version, which was originally accepted by said meeting, was only adapted for the SAM Region.

2.1.2 The Meeting noted the information provided by WP/05, including its Appendix A, and agreed the following draft conclusion based on the suggested actions:

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| DRAFT CONCLUSION ePPRC/03/01 | | GUIDE FOR THE GREPECAS AIRPORT COLLABORATIVE DECISION MAKING (A-CDM) IMPLEMENTATION | |
| What: That, considering the new Project F3 on Collaborative Decision Making at the airport Level under the Aerodrome Programme, the States: a) include in Volume III of the Regional Air Navigation Plan the implementation requirements of A-CDM to those applicable airports (the requirements to be designated by the States) and that such implementations follow the implementation guide as a basis; and as part of Project F3; and b) propose to the Secretariat those aerodromes that could serve as pilot implementation projects, so that their performance may be monitored and the expected benefits validated by 30 November 2021. | | Expected impact: <input type="checkbox"/> Political / Global <input type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical | |
| Why: Ensure that, in those States and aerodromes where it is decided, in accordance with the Regional Plan, the implementation of A-CDM or in those aerodromes where the implementation is already underway, it be carried out in a harmonized manner thus avoiding disruptions in future integration between aerodromes and with the Air Traffic Management (ATM) network. | | | |
| When: 30 November 2021 | | Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed | |
| Who: <input checked="" type="checkbox"/> States <input type="checkbox"/> ICAO <input type="checkbox"/> Other: | | | |

2.1.3 Concerning Meteorology (MET) area activities, under **WP/06**, the Secretariat presented the most relevant activities for the implementation of the provisions of the Meteorological Service (MET) for international air navigation, emphasizing the most recent amendments to Annex 3 and the introduction of the Basic Building Blocks (BBBs) framework as part of the Sixth Edition of the GANP. In this sense, the Secretariat requested the States to take action and implement MET BBBs elements, considering to expedite the finishing and implementation processes of those elements.

2.1.4 WP/06 also described the Systemic Assistance Programme (SAP) of the NACC Regional Office and the assistance mechanisms of the SAM Regional Office, and mentioned some success stories to solve MET States' needs in the CAR/SAM Regions. In addition, the working paper indicated subsequent mechanisms to meet the needs of Contracting States and provide assistance on the effective implementation of ICAO Annex 3 SARPs.

2.1.5 Based on the aforementioned, the Meeting adopted the following draft conclusion:

| DRAFT CONCLUSION ePPRC/03/02 | | IMPLEMENTATION OF ICAO ANNEX 3 STANDARDS AND RECOMMENDED PRACTICES (SARPS) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <p>What:</p> <p>That, Contracting States:</p> <p>a) consider the necessary mechanisms to verify the effective implementation of the Basic Building Blocks (BBBs) corresponding to the Meteorological Service for International air navigation and notify their implementation emphasizing the following:</p> <ul style="list-style-type: none"> i) Quality Management System (QMS)/MET; ii) training of aeronautical meteorological personnel (considering international standards according to guidance from the World Meteorological Organization Publication 1083); iii) exchange of Operational Meteorological Information Messages (OPMET) in the ICAO Weather Information Exchange Model (IWXXM) format; iv) procedure for cases of volcanic ash and release of radioactive material; v) procedures for issuing information concerning <i>en-route</i> weather phenomena which may affect the safety of aircraft operations (SIGMET), information concerning <i>en-route</i> weather phenomena which may affect the safety of low-level aircraft operations (AIRMET), Aerodrome Warnings, Wind Shear Warnings; and vi) SIGMET issuance procedures in coordination with the Meteorological Watch Offices [MWO] of the adjacent Flight Information Regions (FIRs); and <p>b) finalize the implementation of the operational meteorological information (OPMET) message exchange in IWXXM format as a basis for the System wide information management (SWIM) equipping the operational meteorological offices (Aeronautical Meteorological Station [AMS], Aerodrome Meteorological Office [AMO] and Meteorological Watch Office [MWO]) with the following communications infrastructure:</p> <ul style="list-style-type: none"> i) connection to the Aeronautical Message Handling System (AMHS) system; ii) AMHS terminal installed in the MET Offices with the capacity to translate OPMET messages, from the Traditional alphanumeric code (TAC) format to the IWXXM format; and iii) AMHS terminals installed in MET Offices have the capacity to attach messages in IWXXM format to OPMET messages in TAC format. | <p>Expected impact:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Political / Global <input type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/ Technical | |
| <p>Why:</p> <p>Contracting States are required to ensure an adequate organization of the Air Navigation Services (ANS), particularly the Meteorological service for international air navigation and to properly implement the ICAO Annex 3 SARPs.</p> | | |
| <p>When:</p> <ul style="list-style-type: none"> a) 30 November 2021 b) 30 June 2022 | <p>Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed</p> | |
| <p>Who: <input checked="" type="checkbox"/> States <input type="checkbox"/> ICAO <input type="checkbox"/> Other:</p> | | |

2.1.6 The meeting reviewed **WP/07** on the Aeronautical Information Services (AIS)/Aeronautical Information Management (AIM) Activities for CAR and SAM Regions, presented by the Secretariat.

CAR Region

2.1.7 For the CAR Region, it was reported that an approach towards planning actions be considered to accelerate the process of completion of the 21 steps of Phases 1, 2 and 3 of the AIS to AIM Transition Roadmap, and the implementation of the BBB and the Procedures for Air Navigation Services (PANS) - AIM. Likewise, States were urged to keep their information/data updated.

2.1.8 The Secretariat requested a special interest in the AIM Collaborative Plan of the CAR Region that requires the participation of the States to update the progress data in the 21 steps of the ICAO Roadmap to AIM, and of this way to have a complete vision of the total advance of NAM/CAR Regions for the transition to AIM, the implementation towards the System Wide Information Management (SWIM).

2.1.9 The Secretariat commented a fundamental aspect in the AIM implementation process, which is the standardization itself, which is mainly focused on ensuring the quality of the data with emphasis on the QMS. This is key for the exchange of information and data in support of ATM, using the Aeronautical Information Exchange Model (AIXM)

2.1.10 The Meeting was also reminded that for almost 11 years, ICAO has yet to release and publish the guides that complement some of the most important steps for the transition to AIM, such as: AIM Quality, Doc 9839 (steps P-17 and P-18), the AIM Instruction Manual, Doc 9991 (step P-16), Guidance Guides for the Aeronautical Information Exchange Model (steps P-08, P-09, P10 and P-19) and also the Orientation Guides for the electronic Aeronautical information Publication (e-AIP) (step P-11, which incorporates steps P-15 and P-20).

2.1.11 Finally, it was reported that the AIM monitoring website will be activated, linked to the AIM Collaborative Plan, for which it is expected that the States provide their information through a dashboard, according to the dates established by the North American, Central American and Caribbean Working Group (NACC/WG) AIM Task Force (TF). This site will contain guides to support the implementation of the 21 steps to the transition to AIM, in addition to providing the AIM progress status of the NAM/CAR Regions. The progress of an initial beta version of the CAR AIM Tracking Website will be presented at the GREPECAS/19 Meeting.

Región SAM

2.1.12 The Meeting took note of the progress of the implementations in the AIS/AIM area in the SAM Region. Concerning it, the progress reported from the ePPRC/02 are the following:

- a) Aeronautical Information Publication (AIP) in electronic format (e-AIP)
Progress is observed in Argentina, Chile, Paraguay, and Peru;
- b) Terrain and Obstacle Digital Data Sets (TOD)
Progress is reported in Brazil, but the other States have not reported new obstacles survey. The States said that, in the context of the pandemic, it has become challenging to carry out the work requested for this element; and

c) QMS/AIM

Bolivia has made significant progress in implementing the QMS/AIM. Paraguay has regained its certification in December 2020. Additionally, Panama is preparing for the Certification Audit for the end of this year.

2.1.13 The Meeting was also informed of the AIM training courses promoted by the SAM Region, with support from the Regional Project. The delivery of these courses is carried out to create capacities in the States for AIM.

2.1.14 The Meeting, after analysing the information contained in WP/07, and considering that, the delayed implementation of phase 2 of the Roadmap from AIS to AIM has a direct impact on the performance of SWIM, decided to issue the following Draft Conclusion

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| DRAFT CONCLUSION ePPRC/03/03 | | IMPLEMENTATION OF THE DIGITAL DATA SETS (DDS), THE DATA CATALOG, THE STANDARD MODEL FOR THE EXCHANGE OF AERONAUTICAL INFORMATION AND THE e-AIP | |
| What: That, States, as far as possible, accelerate the implementation of the Digital Data Sets (DDS), the Data Catalog, and the standard Information Exchange Models, in all their domains, in order to make possible the management of information in an electronic environment by 2024. | | Expected impact: <input checked="" type="checkbox"/> Political / Global <input checked="" type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical | |
| Why: To comply with the requirements of ICAO Annex 15 and build the basis for SWIM. | | | |
| When: | Complete the implementations by 2024. | Status: | <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed |
| Who: | <input checked="" type="checkbox"/> States <input type="checkbox"/> ICAO <input type="checkbox"/> Other: | | |

2.1.15 Under **WP/08** - Guidance on the Issuance of SNOWTAM, the Meeting was informed of the preparation of a Guide for the issuance of SNOWTAM by the Secretariat, based on ICAO Annexes 14 and 15, the PANS - AGA and AIM, and Circular 355.

2.1.16 The Meeting considered that the new format of SNOWTAM generates a degree of difficulty, its implementation to the States where snow does not occur. Later, after reviewing the proposed guide, the Meeting understood that a guide is necessary to standardize concepts and procedures at the time of issuing a SNOWTAM

2.1.17 The Secretariat also recommended that the Guide be translated to English and then submitted to the GREPECAS plenary for approval. Likewise, the Meeting recommended that the Secretariat review the Guide's proposal and, if needed, modify the name considering the SNOWTAM scope was extended to the contamination of the runway by different types of hydrometeors (rain, drizzles, thunderstorms, etc.)

2.1.18 Under **WP/10**, the Secretariat presented information on the implementation activities for ANS, referring to the Communications, Navigation and Surveillance (CNS) field, developed in the CAR/SAM Regions since the last GREPECAS PPRC Meeting.

2.1.19 Within the framework of Projects C - Automation and Situational Compression and D - Ground-Ground and Ground-Air Communications Infrastructure of GREPECAS, the main initiatives/activities developed in the CAR/SAM Regions were presented in said paper, related with the implementation of ANS in the Communications, Navigation and Surveillance (CNS) area.

2.1.20 The activities carried out jointly in the CAR/SAM Regions were presented, in addition to the activities within the NSC carried out by each region.

2.1.21 The CAR Region presented information about activities in Air Traffic Services Inter-facility Data Communication (AIDC), MET, Surveillance and the Unmanned aircraft system (UAS) Remote piloted aircraft system (RPAS) and cybersecurity initiatives to cover ANS activities.

2.1.22 The SAM Region presented the activities regarding AIDC, Aeronautical Message Handling System (AMHS), Automatic Dependent Surveillance – Broadcast (ADS-B) Satellite testing, in addition to the activities of the Interoperability Task Force (Interop WG) to support and promote initiatives to modernize ANS and ensure interoperability between the automated systems used by AIM, ATM, Air traffic flow management (ATFM), CNS and MET users.

2.1.23 Under the presentation of the CNS activities of the CAR/SAM Regions, it was reported that the CAR Region has approved the "Concept of Operations for ADS-B for the NAM/CAR Regions" as a guideline document for the implementation of terrestrial and satellite ADS-B. This document is a guide to assist States in analysing the need for ADS-B operational implementation.

2.1.24 Taking into account that the development of the guide for the NAM/CAR Regions was carried out with the collaboration of the SAM States/Territories of Brazil and French Guiana, it was considered appropriate that the document be reviewed by the rest of the SAM States, to analyse the possibility of converting the document into a regional NAM/CAR/SAM guide, for the benefit of the all the regions. Note was taken and will seek to support the indicated progress.

2.1.25 Under **WP/15**, the Secretariat presented the Review and Status of Aerodrome F Programme Projects for the CAR and SAM Regions. Particularly, regarding Project F1 – Aerodromes Certification and Safety, the Meeting was informed that in the CAR Region there was little increment in 2021 in the number of certified aerodromes due to two factors: the certification of one airport in Mexico and the removal of 10 international aerodromes as requested by Bahamas, which resulted in the reduction to 146 aerodromes that represent a 62%.

2.1.26 Additionally, on the Runway Safety Team (RST) implementation, to date 73 aerodromes have implemented the RST and assistance is still being provided to the States/aerodromes that are in the implementation process, with the terms of reference, checklist, among others.

2.1.27 Regarding the SAM Region Project F1, the aerodrome certification status shows that, of a total of 104 international aerodromes, 48 have been certified. With the COVID-19 pandemic, in some States the Certification processes had to be postponed, but they are restarting. Regarding the implementation of RST, to date there is 32.69% implementation (34 aerodromes). Regarding projects F2 and F3, progress continues with the publication of the A-CDM guide for CAR/SAM Regions and preparation of airport planning guide material. The Meeting took due note and requested to support the Project F.

2.1.28 Under **WP/18**, the Secretariat presented the Challenges for Search and Rescue (SAR) Implementation in the CAR/SAM Regions, adopting the following draft conclusion:

| DRAFT CONCLUSION | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ePPRC/03/04 | REMOTE SUBSCRIPTION OF LETTERS OF AGREEMENT (LOAs) AND EFFECTIVE REGIONAL IMPLEMENTATION OF THE SAR SERVICE |
| <p>What:</p> <p>That, the ICAO NACC and SAM Regional Offices evaluate the current challenges regarding the provision of SAR services in the CAR/SAM Regions and identify opportunities for improvement in order to:</p> <ul style="list-style-type: none"> a) optimize regional coordination to allow subscribe and/or update SAR agreements, considering the signing of them remotely; b) promote joint work of the SAR between the CAR/SAM Regions; and c) develop a Project proposal to support activities a) and b) above, for GREPECAS consideration by the GREPECAS/19 Meeting. | <p>Expected impact:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Political / Global <input checked="" type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical |
| <p>Why:</p> <p>The provision of SAR services is an essential part of air navigation services, it is necessary to update and progress on the implementation of the requirements of Annex 12 to support the effective implementation of SAR as part of the follow-up to the Plan Air Navigation of the CAR/SAM Regions.</p> | |
| <p>When: GREPECAS/19 Meeting</p> | <p>Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed</p> |
| <p>Who: <input type="checkbox"/> States <input checked="" type="checkbox"/> ICAO <input type="checkbox"/> Other:</p> | <p>ICAO NACC and SAM Regional Offices</p> |

2.2 Air Navigation Services (ANS) Implementation in the CAR/SAM Regions

2.2.1 **WP/02** - CANSO Air Traffic Flow Management (ATFM) Data Exchange Network for the Americas (CADENA) Project Advancements, was presented by Jamaica , Trinidad and Tobago, *Empresa Argentina de Navegación Aérea* (EANA), *Empresa Cubana de Navegación Aérea* (ECNA), Civil Air Navigation Services Organisation (CANSO), *Corporación Centroamericana de Servicios Navegación Aérea* (COCESNA), and International Air Transport Association (IATA). Under the approval of the States, Air Navigation Service Providers (ANSPs) and International Organizations described above. CANSO briefed the paper, thankful for the trust provided by the other organizations.

2.2.2 CANSO provided a detailed presentation of the CADENA project, and described that CADENA follows ICAO Doc 9971 – Manual on Collaborative Air Traffic Flow Management, and updates its work plan based on the regional documents published by the ICAO Regional Offices (Caribbean/South American Air Traffic Flow Management Concept of Operation (CAR/SAM ATFM CONOPS), airspace restructure). CANSO explained the tangible results and benefits that ANSPs, airlines, and stakeholders have gained by participating in CADENA.

2.2.3 The accomplishments were indicated, which include the signature of the CADENA ATFM- Collaborative Decision Making (CDM) Letter of Agreement (LoA) among CADENA members, signature of the LoA related to Space Launch and Recovery, CADENA member data integration to the Federal Aviation Administration SWIM connection, improvements to the CADENA Operational Information System (OIS), weekly operational web conferences, hurricane, and contingency Ad-hoc conferences, CDM operations conferences, ATM/Space CDM conferences, CADENA ATFM/CDM Procedures Manual, and the development of the Planned Airways System Alternative (PASA) routes optimization. The accomplishments also included how PASA is supporting vaccine priority flight coordination, hurricane route deviations, among others. CANSO explained the process of the quarterly contingency training.

2.2.4 Under the route optimization project, CANSO communicated the results of the three city-pair trials (one operation, round trip) and estimated that the combined annual savings shows \$800K USD in operating costs and 1,950 tons of CO2 reduction. CANSO and IATA are moving into 90-day trials for three city pairs. More city-pair PASA route optimization trials are underway to move towards the Direct Routing (DCT) and Free Route Airspace (FRA).

2.2.5 As for recommendations, CANSO invited ANSPs and stakeholders to participate in the weekly ATFM/CDM operational planning web conference and encouraged regional ANSPs to share information and use the CADENA OIS. CANSO highlighted that participation in CADENA and the use of the OIS is at no charge to the ANSPs, airlines, and aviation organizations.

2.2.6 The Secretariat presented **WP/12** on Tasks Related to the Worldwide Notice to Airmen (NOTAM) Campaign: Elimination of Permanent NOTAMs, also known as Global NOTAM 2021 Campaign (NOTAM 2021), which was launched by ICAO Headquarters on 8 April 2021, as a new Global Campaign on NOTAM Improvement (NOTAM2021) by initiating Phase 1 with a global webinar, in collaboration with its seven Regional Offices on the old NOTAMs. This webinar was leaded by Dr. Pufahl, SWIM Technical Officer, (APufahl@icao.int).

2.2.7 As an initial action of the NACC Regional Office, a State Letter Ref.: *NT-N1-6.4 - E.OSG - NACC86055*, dated 10 June 2021, was issued, informing the start of Phase 1 on the old NOTAMs, and inviting the States to participate in the events to come on this topic. The first presentations and recordings of the World NOTAM Campaign Webinar are available at:

<https://www.icao.int/Meetings/NOTAM2021/Pages/default.aspx>

2.2.8 The Secretariat informed that four follow-up webinars have also been scheduled for 16 June, 31 August, 28 October, and 15 December 2021. Follow-up webinar registration links, as well as other information about the campaign, including a NOTAMeter tool are provided on the ICAO NOTAM website

<https://www.icao.int/airnavigation/information-management/Pages/GlobalNOTAMcampaign.aspx>

2.2.9 The Meeting was informed that the 2021 NOTAM Global Campaign has as the objective to facilitate the way NOTAMs are published and used and be more secure, concise and operational. Moreover, the NOTAM data originator remains responsible for ensuring that NOTAM information is relevant and the International NOTAM Office (NOF) is responsible for reviewing NOTAM publication requests and advising accordingly, in order to support a secure, timely, operational and concise NOTAM (using the Q code).

2.2.10 Finally, the Meeting was requested to:

- urge States, Territories and International Organizations to participate in the Global NOTAM 2021 Campaign;
- have the State Civil Aviation Administration's carry out the necessary tasks; and
- the NOTAM Global Campaign will be supported.

2.2.11 Under **WP/13** - Global NOTAM Improvement Campaign: Corrective Action Plan in the SAM Region, the Meeting was informed of the Campaign, which is planned to be developed into two phases:

- Phase 1: Depreciation of old NOTAMs, launched in a virtual event on April 8, 2021. Following the virtual launch, a series of webinars were planned throughout 2021 to monitor progress.
- Phase 2: Raise awareness about the correct use of NOTAM messages

2.2.12 The Meeting also was informed of the activities that SAM Region implemented in the context of the Global Campaign.

2.2.13 The Meeting urged the States which have NOTAMs with a validity period greater than 90 days still active to proceed to replace them with a Supplement or an Amendment to the AIP, depending on each case.


2.2.14 Under **IP/05**, the Secretariat informed punctually of the AIM Concept and presented the global developments related with AIM. in particular with the AIM (2.0) Concept, under the context of the Sixth Edition of the Global Air Navigation Plan (GANP) (ICAO Doc 7950) and Aviation System Block Upgrade (ASBU), as well as the BBBs, which are considered as a system independent from ASBU and related to GANP that represent a defined baseline for ANS.

2.2.15 It was indicated that the AIM Concept encompasses the management, exchange and integration of digital aeronautical information that is time-sensitive (4D) in a safe and efficient manner. The interoperability together with other relevant domains will allow to provide shared situational awareness to all members of the global ATM community for CDM.

2.2.16 The AIM concept considers process of the new Digital NOTAM (DNOTAM), aeronautical charts and Digital Data Sets (DDS - PANS-AIM), it is considered as an enabler service of the SWIM concept (Doc 10039) and includes:

- to acquire aeronautical data from reputable data sources;
- to process (validation, verification and management) of aeronautical data and information;
- to provide access to aeronautical information through information services (in a SWIM context); and
- to consume aeronautical information with the help of SWIM applications by end users.

2.2.17 The scope of the AIM (Operational) Concept encompasses various information management processes as indicated in the Scheme 1 below:

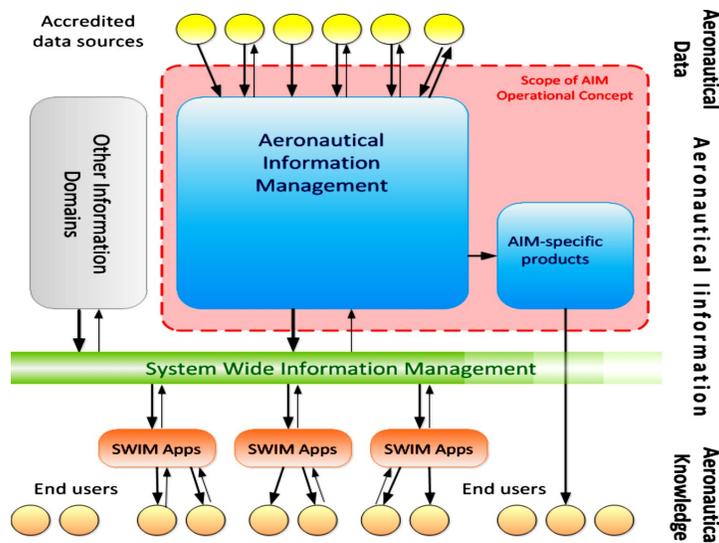

2.2.18 To conclude, the Secretariat proposed to the Meeting to consider the development of AIM Concept (2.0 Operational) in the Regional State’s planning, considering that all parties involved must have a clear understanding of their respective roles and responsibilities in the creation, organization, provision and management of services, as well as the performance of safety oversight. The distribution of aeronautical information under the concept of Aeronautical Information Management (AIM) is listed by means of distribution, distribution channel and type of connection, actors involved and speed of distribution:

| Aeronautical Information Products | Distribution medium | Distribution channel | Connection type | Actors involved | Distribution speed |
|-----------------------------------------------------|---------------------|----------------------|-----------------|-----------------------------|--------------------|
| Aeronautical Information Management (AIM) | | | | | |
| All aeronautical information | Digital | Broadband IP | G-G | The entire ATM community | Ultra-fast |
| All operationally relevant aeronautical information | | Data link | A-G | Pilot, controller, dispatch | Very fast |

2.3 GREPECAS ANS Dashboard Initiative

2.3.1 Under **WP/17**, the Secretariat presented the GREPECAS ANS dashboard initiative and the advance on the way and mean to report the progress of regional implementation through planned online system referred to as the Regional CAR/SAM Dashboard, according to the progress made by GREPECAS of the implementation of both CAR and SAM Regions. The next step calls for a measurement of air navigation areas performance, monitoring and reporting the applied strategy.

2.3.2 It was mentioned to the Meeting that with the implementation of a measurement and reporting strategy it is necessary to identify a set of regional performance indicators, supported by metrics. Therefore, the States should also implement a measurement strategy that includes the collection, processing, storage of data and mainly the presentation of reports considering the same identified regional performance metrics, this is something basic in the success of this approach.

2.3.3 To support of these tasks of data collection, measurement, reporting and data analysis, GREPECAS has recently created a new group under its structure: the Data Analysis Working Group (DAWG). Likewise, the ICAO CAR and SAM websites will allow the visualization of the implementation status through interactive graphs, maps and dynamic tables. As an additional point of this system, specific reports will be generated that will allow an easy representation of the data sets in the CAR/SAM Regional dashboard and in support of the ICAO Annual Air Navigation Report.

2.3.4 Additionally, it was commented that transparency will be sought in the exchange of information so that the system is safe and efficient. In accordance with these principles, the Regional Dashboard is essential to provide a vision of the status of implementation of operational safety, air navigation, efficiency and environmental benefits for the CAR/SAM Regions, ensuring that the information and data are used fairly and consistently, with the goal of improving safety and efficiency.

2.3.5 The Secretariat informed that an initial version could be presented during the GREPECAS/19 Meeting and concluded to consider the importance of providing the information and data sets required for the Annual Air Navigation Report and to urge the States to provide the data and the necessary information to the ICAO Regional Offices, as required. The Meeting took note of the GREPECAS ANS Dashboard Initiative.

Agenda Item 3: Organizational and Administrative Activities of the GREPECAS

3.1 Follow-up to outstanding GREPECAS Conclusions/Decisions

3.1.1 Under IP/03REV, the Secretariat presented an executive summary that showed the validity status of the conclusions and decisions resulting from the GREPECAS/18, PPRC/05, ePPRC/01 AND ePPRC/02 Meetings. The Secretariat's comments on the Decisions of said meeting were included, concluding that the resulting decisions and conclusions are presented in **Appendix C** to this minute.

3.2 Follow-up to the GREPECAS Improvements

3.2.1 IP/04 -Follow-up of GREPECAS Improvements showed the updated status of the Improvement Project to GREPECAS that, despite the adverse conditions, progress was made by the Secretariat in different topics of the Management System Project for improvements, which were detailed in the Appendix to IP/04, but in general, progress is observed as follows:

| Tasks by Areas | Number of tasks | Percentage | Analysis |
|----------------------------------------------|-----------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Diagnosis | 2 | 75% 50% | <p>Of the 35 tasks in total, defined in the Appendix Table, which represent 100%, the following progress behaviour is observed:</p> <ul style="list-style-type: none"> • Of which, 12 tasks are between 50% and 100% of progress and their completion, which represent 34.28% of progress in the tasks • Another 19 tasks have an advance between 10% and 35% are, which represent 54.28% of the total |
| System Requirements Replaced by DASHBOARD | 7 | 10% In Progress initial phase | |
| System Software Replaced by DASHBOARD | 9 | 10% In Progress initial phase | |
| GREPECAS structure | 3 | 100% | |
| | 1 | 90% | |
| | 2 | 0% | |
| GREPECAS Website | 3 | 90% | |
| | | 75% | |
| | | 65% | |

| Tasks by Areas | Number of tasks | Percentage | Analysis |
|---------------------------------------------|-----------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GREPECAS Image Change | 2 | 80%-65% | <ul style="list-style-type: none"> Only 4 tasks did not start, so their progress was 0%, which represents 11.42% of tasks without progress. |
| | 2 | 35%-20% | |
| | 1 | 0% | |
| Activities towards GREPECAS 19 | 1 | 80% | |
| | 1 | 30% | |
| | 1 | 0% | |
| Total Main Tasks (Phase 1) 35 = 100% | | | |

3.2.2 The Meeting was informed of the GREPECAS initiative revision to prioritize activities and tasks related through the Technological Platform for Planning, Programs and Projects through a Control Panel system (dashboard), as a monitoring and control mechanism and measurement of the efficiency of programmes and projects, as well as the generation of timely reports, regarding the status of the ANS implementation, with the following goals for 2022.

| INITIAL GOALS TO THE YEAR 2022 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Goal 1) Increase the annual percentage of effective implementation of the projects proposed in the Working Groups. |
| Goal 2) Link the needs of the CAR/SAM States with the implementation projects of the Regions, contributing to regional initiatives, through the training of Human Resources. |
| Goal 3) Establish an effective work methodology that guarantees the continuity of the work and the fulfilment of current and future goals. |
| Goal 4) Establish a program for the exchange of good practices among the States, based on the objectives of the Global Air Navigation Plan (GANP) and the ICAO Global Aviation Safety Plan (GASP), through the GREPECAS and the Regional Aviation Safety Group–Pan America (RASG-PA) implementation projects. |

3.2.3 The Secretariat provided a detailed report of the improvement activities and its status, as shown in **Appendix D** to this minute.

3.3 GREPECAS - RASG-PA Coordination

3.3.1 Under **WP/16**, the Secretariat presented to the Meeting the progress status of the implementation of the Global Runway Conditions Notification Format (GRF) in the CAR and SAM Regions, which has the implementation deadline established by the ICAO Council for 4 November 2021, in addition to some challenges identified in it. Several States commented on the challenges identified, which were noted by the Secretariat for analysis in a Workshop that the ICAO NACC and SAM Regional Offices are organizing in conjunction with CANSO on GRF aimed at air navigation service providers.

3.3.2 The Meeting took note of the content of the Paper and the concern of the Secretariat and the States regarding the progress of GRF implementation, adopting the following draft conclusion and decision:

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DRAFT CONCLUSION | |
| ePPRC/03/05 | GRF IMPLEMENTATION PLAN IN THE CAR AND SAM REGIONS |
| What: That, in order to encourage the harmonized implementation of the GRF in the Member States, the CAR/SAM States, that to date have not sent their GRF implementation plan and/or the assignment of GRF focal points to send it to their corresponding Regional Office by 15 October 2021. | Expected impact: <input type="checkbox"/> Political / Global <input type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical |
| Why: The implementation of the GRF is a measure adopted by the Member States to be implemented no later than 4 November 2021 and will significantly impact operational safety and therefore the capacity and efficiency of air transport. | |
| When: 15 October 2021 | Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed |
| Who: <input checked="" type="checkbox"/> States <input type="checkbox"/> ICAO <input type="checkbox"/> Other: | |

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DRAFT CONCLUSION | |
| ePPRC/03/06 | REINFORCE EFFORTS TO PROMOTE THE IMPLEMENTATION OF GRF IN CONJUNCTION WITH RASGPA |
| What: That, in order to encourage the harmonized implementation of the GRF in the Member States, GREPECAS coordinate with RASG-PA so that both forums can urge Member States to make efforts to guarantee the implementation of the GRF as soon as possible, by 15 October 2021. | Expected impact: <input type="checkbox"/> Political / Global <input type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical |
| Why: The implementation of the GRF is a measure adopted by the Member States to be implemented no later than 4 November 2021 and will significantly impact operational safety and therefore the capacity and efficiency of air transport. | |
| When: 15 October 2021 | Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed |
| Who: <input checked="" type="checkbox"/> States <input checked="" type="checkbox"/> ICAO <input type="checkbox"/> Other: | |

3.3.3 The Meeting was informed on the progress and challenges in the Global Reporting Format (GRF) implementation in the CAR/SAM Regions. The first detailed action was to coordinate with RASG-PA its support in order to encourage Member States to make efforts to guarantee the GRF implementation as soon as possible. Whereby, it was mentioned that this issue can be discussed in the next back-to-back meeting that will be held between the GREPECAS and RASG-PA plenary meetings.

3.3.4 Under **IP/05**, the Meeting was informed that during the CAR/SAM Planning and Implementation Regional Group (GREPECAS) Twenty First Scrutiny Working Group Meeting (GTE/21), held from 23 to 26 August 2021, the GTE jointly with the Pan America - Regional Aviation Safety Team Meeting (PA-RAST) developed and submitted a working paper on cooperation of safety data/information review between the GTE and the PA-RAST. Through this working paper, it was concluded that the GTE and PA-RAST will work together to develop a framework that includes a mechanism to exchange and analyse the information from both groups. It was also determined that the GTE will identify how this data exchange can be used to benefit in a better way the safety analysis of the Reduced Vertical Separation Minimum (RVSM) airspace between the CAR/SAM Regions.

3.3.5 It was also mentioned that on 24 August 2021 the First GREPECAS Data Analysis Working Group (DAWG/1) Meeting was carried out, which was considered as other excellent opportunity for a future coordination or collaboration of this team with the RASG-PA Safety Monitoring and Report Team (SMRT).

3.4 GREPECAS Plenary Meeting and Successive Back-to-back Meeting with RASG-PA and their periodicity

3.4.1 Under **WP/04**, the Secretariat informed the Meeting about the GREPECAS and RASG-PA Consecutive Plenary Meeting, following the requirements of the ICAO Council through the Air Navigation Commission (ANC), established the Planning and Implementation Regional Group (PIRGs) and the Regional Aviation Safety Groups (RASGs), with the purpose of identifying: regional priorities, implementation objectives and Air Navigation and Safety indicators in the regional implementation of the GANP (Doc 9750) and the GASP (Doc 10004), and with it, provide practical recommendations to the Council In mention.

3.4.2 The Terms of Reference (ToRs) for PIRGs and RASGs reviewed and approved by the ICAO Council in 2019 requested the requirement to hold the GREPECAS Plenary Meeting every year and consecutively (back-to-back) with the RASG-PA in order to report to the ICAO Council (ANC). This took place during the 40th session of the ICAO Assembly (from 24 September to 4 October 2019), where it was decided to align the PIRGs and RASGs meeting calendar for the presentation of annual reports to the Council (A40-WP/608) and during the review of Assembly Resolutions and Decisions (C-WP/14983 Rev.2), the Assembly Decision that the PIRGs and RASGs meet and report to the Council on an annual basis was approved.

3.4.3 Taking into account the update made by the ICAO Council, modifying the ToRs and indicating that the GREPECAS and RASG-PA groups will meet every year, and considering that the PPRC and the Executive Steering Committee (ESC) do not have the scope of plenary meetings of these groups before the ICAO Council, both GREPECAS and RASG-PA will hold their plenary meetings consecutively (back-to-back) on October 2021, as provided by the Council. This implies, as mentioned, to take the necessary measures to modify the Procedures Handbooks of both regional groups.

3.4.4 The Secretariat indicated that annual reports will be presented with a minimum content and also considered that the plenary meetings should approve the content of the annual report that will be submitted to the ANC so that it will be presented later to the Council. To this end, the following draft conclusion was adopted:

| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| DRAFT CONCLUSION ePPRC/03/07 | | NINETEENTH PLENARY MEETING OF GREPECAS AND CONSECUTIVELY WITH RASG-PA FOR THE APPROVAL OF THE ANNUAL REPORT | |
| What: That the Secretariat plan and materialize the Nineteenth Meeting of the CAR/SAM Regional Planning and Implementation Group (GREPECAS/19) and coordinates it to be consecutive (back-to-back) to the Eleventh Pan American Aviation Safety Summit and Tenth Regional Aviation Safety Group — Pan America Annual Plenary Meeting (RASG-PA/11), which will have the purpose of discussing, commenting on and approving the content of the GREPECAS Annual Report for the ICAO Council. | | Expected impact: <input type="checkbox"/> Political / Global <input checked="" type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical | |
| Why: To comply with the content of the Terms of Reference developed by the ICAO Council for PIRGs and RASGs. | | | |
| When: The Provisional Agenda must be complete and available for approval by GREPECAS at least 60 days before the Plenary Meeting. | | Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed | |
| Who: <input checked="" type="checkbox"/> States <input checked="" type="checkbox"/> ICAO <input type="checkbox"/> Other: | | ICAO NACC and SAM Regional Offices | |

3.4.5 Finally, it was also clarified that the ESC members during the ESC/36 Meeting (19 and 20 May 2021) and the ESC Secretariat, agreed to approve the corresponding actions in a coordinated manner for the Plenary Meeting. Consecutive of RASG-PA and GREPECAS, therefore, it was proposed to submit to GREPECAS consideration the Draft Conclusion of the previous paragraph.

3.5 CAR/SAM Air Navigation Plan (ANP) Vol. III Planning

Instructions for use of the template for Volume III of the Regional air navigation plan – CAR/SAM ANP

3.5.1 **WP/09** remarked that PPRC/5 Meeting approved Conclusion PPRC/05/10 "Development of Volume III of the CAR/SAM GANP in preparation of National Air Navigation Plans" which is intended to coordinate efforts for the development of electronic Air Navigation Plan (e-ANP) CAR/SAM Vol. III and updates of the National Air Navigation Plans.

3.5.2 The Secretariat is being executing the "Assistance for the formulation and management of Vol III of the CAR/SAM ANP" under a process aligned to the GANP – Sixth Edition (2019). As part of the aforementioned activities, the Instructions for use of the Template for Volume III of the Regional air navigation plan – CAR/SAM ANP were drafted. (See in **Appendix E** of this minute, the description of planned activities)

3.5.3 The Meeting analyzed the referred Instructions, which will be available for States during the activities of preparation of the Tables and texts of Volume III of the ANP CAR SAM, in accordance with the Template provided by the ICAO Headquarters (See Instructions in the **Appendix F** to this minute). The Instructions cover the following purposes:

- a. Standardize the understanding and practical application of the six-step approach to performance-based planning, as stipulated in the GANP, by air navigation specialists from the States of the CAR/SAM Regions, in the process of filling out the Tables of Vol. III.
- b. Obtain a homogeneous application of the Template of Vol. III and simplify the formulation of the Tables and texts.
- c. Complement the use of GANP tools; AN-SPA, performance dashboard, etc.
- d. Make an orderly transition from the plans and activities framed in the RPBANIP and the SAM-PBIP to the ANP CAR SAM Vol. III.

3.5.4 The aforementioned template is based on a printed format, which describes a sequence of tables that guide the introduction of planning data of each State /Territory, linked to designated airspaces and international airports. Following Tables contain the identification of the objectives of optimizing the performance of air navigation, to define solutions resulting from the ASBU framework or other regional initiatives.

3.5.5 The representatives of the GREPECAS States, assisted by the NACC and SAM Offices, will carry out the preparation of Vol. III. A number of teleconferences, seminars and other on-line activities must be scheduled for this purpose. State counterparts should have the authority to coordinate the development of Volume III with all parties involved in its administration.

3.5.6 Once Vol. III has been prepared, it must be approved by GREPECAS, starting the implementation phase, which should be supported by a programme/project aimed at developing and/or continuing the action plans for the implementation of the solutions identified in the ASBU framework.

3.5.7 Consequently; the Meeting drafted the following conclusion;

| DRAFT CONCLUSION ePPRC/03/08 | | PARTICIPATION OF STATES IN ACTIVITIES FOR THE ELABORATION OF ANP CAR/SAM VOLUME III | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| What: That, States a) adopt the Instructions for the use of template of air navigation regional plan – ANP CAR/SAM, Volume III; b) appoint or ratify their focal points/teams to act as counterparts to the Secretariat and communicate such nomination to the correspondent Regional Office by 20 October 2021; and c) ensure the active participation of focal points/task forces in the activities assisted by the Secretariat for the development of Volume III. | | Expected impact: <input type="checkbox"/> Political / Global <input checked="" type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical | |
| Why: Standardize the understanding and practical application of the six-step approach to performance-based planning by air navigation specialists from the States of the CAR/SAM Regions, in the process of filling out the Tables of Vol. III. Likewise, to obtain a homogeneous application of the Template of Vol. III and simplify the formulation of the Tables and texts. | | | |
| When: By 20 October 2021 | | Status: <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed | |
| Who: <input checked="" type="checkbox"/> States <input checked="" type="checkbox"/> ICAO <input type="checkbox"/> Other: | | | |

3.5.8 Under **WP/14**, the Secretariat presented to the Meeting an extract of the procedures for modifying the Regional Air Navigation Plan in order for the States to take note of the need for Volumes I and II of the ANP to be duly updated to guarantee its accuracy and validity, so as to guarantee a preparation and implementation of the future Volume III of the Plan with an adequate basis.

3.5.9 It was also commented to the States the importance of updating the Plan, and their responsibility under Article 28 of the Convention.

3.5.10 The Meeting took note of the information and based on the actions suggested in the note, adopted the following draft conclusion:

| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| DRAFT CONCLUSION ePPRC/03/09 | | PROPOSED AMENDMENT TO CARSAM ANP VOLUME I, TABLE AOP I-1 AND ANP VOLUME II, TABLE AOP II-1 | |
| What: That, as many aerodromes used for international operations or aerodromes under construction or planned for international operations in the CARSAM Region were not included in CARSAM ANP Volume I, Table AOP I-1 and ANP Volume II, Table AOP II-1, and it is also important that the information included in AOP Tables I-1 and AOP Table II-1 is accurate and up-to-date for regional planning of the other air navigation services. States: a) review the aerodromes listed in CAR/SAM ANP Volume I, Table AOP I-1 by 4 December 2021; b) review Volume II of the ANP, Table AOP II-1 to obtain the list of facilities and services to be provided by the State concerned in each aerodrome listed in Table AOP I-1 by 4 December 2021; c) initiate and send to ICAO NACC and SAM Regional Offices proposed amendments to CAR/SAM ANP Volume I, Table AOP I-1 and ANP Volume II, Table AOP II-1 according to the template provided in WP/14 (Appendix A), if its international aerodromes are not listed in Table AOP I-1 or require amendments to update the information provided in Tables AOP I-1 and AOP II-1 by 4 December 2021; and d) evaluate if the Proposal for Amendment (PfA) proposed to the AOP Tables impact Table MET II-2 of Volume II, of the CAR/SAM e-ANP, and if it will impact it, propose another PfA for Table MET II-2 by 4 December 2021. | | Expected impact: <input type="checkbox"/> Political / Global <input type="checkbox"/> Inter-regional <input type="checkbox"/> Economic <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Operational/Technical | |
| Why: The update of Volumes I and II of the ANP will allow an adequate basis for the construction of Volume III. | | | |
| When: | 4 December 2021 | Status: | <input checked="" type="checkbox"/> Valid / <input type="checkbox"/> Superseded / <input type="checkbox"/> Completed |
| Who: | <input checked="" type="checkbox"/> States <input checked="" type="checkbox"/> ICAO <input type="checkbox"/> Other: | | |

Agenda Item 4: Other Business

4.1 Through **WP/03**, CANSO presented the ICAO, CANSO, and Airbus ATM Cybersecurity Policy Template developed to address cybersecurity in ATM.

4.2 As technology and cyber-systems are now essential to modern society and air traffic management, CANSO highlighted the importance of securing our systems and adopting all necessary measures to ensure we continue to provide a highly safe and seamless service.

4.3 The policy template helps to ensure the resilience of the aviation system by outlining steps for developing a custom-fit solution for organisations seeking to establish cybersecurity policies as part of their standard procedures and integrate them into every aspect of their business.

4.4 CANSO provided a review of the ICAO, CANSO and Airbus webinar on aviation cybersecurity implementation addressed to States and Air Navigation Service Providers (ANSPs). The webinar was divided into three series that explained the threats and risks of a cyber-attack and provided cases of a security breach within our industry, described the ATM Cybersecurity Policy Template, evaluated the implementation status, and supported the development of a draft cybersecurity manual in several States/ANSPs. Over 250 participants from the Latin America and Caribbean, Europe, Africa, and Asia region attended the webinar.

4.5 CANSO also informed the meeting of the support offered by ICAO, CANSO and Airbus to different States in the NACC region in evaluating their cybersecurity maturity level. Other States and ANSPs are submitting their information and completing the checklist for evaluation.

4.6 Concluding with WP/03, CANSO invited and encouraged States and ANSPs to develop their cybersecurity and strategic plan to ensure continued mission operations regardless of the cyber threat; and participate in cybersecurity assessment and evaluation.

4.7 The Secretariat, under **WP/11**, reported that because of Decision ePPRC/02/04 “Coordination for the implementation and assistance to the States in UAS/RPAS and Cybersecurity”, an analysis was carried out on the responsibilities with the States of the different regional implementation groups. For this reason, an analysis was carried out on UAS operations to determine the challenges they represent to air traffic control and analyse their applicability in other areas:

1. ANS: AIM, AGA, ATM, CNS, MET and SAR (GREPECAS)
2. Aviation Security and Facilitation (AVSEC / FAL)
3. Safety (RASG-PA)

4.8 In this sense, the Secretariat mentioned that, at the same time, all the Regional Groups have to work together, because the UAS operations interact in all the Areas. All ICAO Annexes will be updated for these operations, therefore, when developing national regulations, procedures and other documents, ICAO requirements must be integrated and their applicability analysed according to the type of operation.

4.9 In addition, on the results of the analysis of the UAS/RPAS systems, the Secretariat shared information on the development of documentation available by ICAO, to support the development of state regulations and the organization of the approval process for this type of aviation (**Appendix G** to this minute). ICAO, according to the analysis cited above, established three categories for UAS operations:

1. Open category and specific categories: ICAO Model for the regulation of UAS Part-1 and Part-2. Document under the following link:
<https://www.icao.int/safety/UA/Documents/Final%20Model%20UAS%20Regulations3%20-%20Parts%20101%20and%20102.pdf>

2. Certified category: All ICAO Annexes apply.
3. Approval of aviation organizations (AAO): For UAS operators, ICAO Model for the regulation of UAS Part-149:
<https://www.icao.int/safety/UA/Documents/Final%20Model%20UAS%20Regulations3%20-%20Part%20149.pdf>

Cybersecurity

4.10 Under WP/11, the Secretariat also reported on relevant aspects regarding cybersecurity technology and cybernetic systems in general and indicated the responsibility of the Working Groups (WGs) that support regional implementation tasks on this issue. The Secretariat invited the Meeting to observe the ICAO Cybersecurity strategy found at the following link:

<https://www.icao.int/cybersecurity/Documents/AVIATION%20CYBERSECURITY%20STRATEGY.SP.pdf>

4.11 For modern society, there is a dependence on technology, which provides greater efficiency to day-to-day activities. However, along with the benefit of cyber-technologies, there are risks that affect all systems and infrastructures. Cyber threats and cyber-attacks have a transnational component and effect, as global systems are interconnected globally. In addition, the complexity of the action has implications beyond coordination, for various actors at the national, regional and international levels. Establish information on the ICAO cybersecurity strategy and its seven pillars.

4.12 The Meeting recalled Resolution A40-10, citing that there are ways to address cybersecurity in civil aviation, that ICAO Assembly 40 urged States and Industry to adopt measures to counter cyber threats to civil aviation working on the implementation of cyber security strategies. Additionally, identify potential cyber security threats and risks, define responsibilities, promote a common understanding among member States of cyber threats and risks and promote coordination between governments and the industry in aviation cybersecurity and others. WP 11 in its paragraph 2.11, presented a series of measures identified by ICAO.

4.13 It was mentioned that the interfaces between aviation security components require special attention, as well as ATM security, component security and CNS operations. (ADS-B, GNSS, data link), airspace security, airport security and the security and protection of aeronautical information and data in AIM. **Appendix H** to this minute provides information on the applicability of the documentation available from different sources, to begin risk analysis and cybersecurity work for ATM operations. All areas of aviation can be affected by cyberattacks

4.14 The Meeting concluded jointly with the Secretariat that both the UAS Operation and Cybersecurity challenges could not be addressed in isolation by the different sectors of the aviation community, both require work that includes all aviation disciplines. In addition, they require seeing the system as a whole. Moreover, not by parts, proposing the following approach:

- There are more unmanned aircraft flying, new services emerging, technology in constant development, which includes Artificial Intelligence (AI), provides new challenges to operations and its regulation ensuring an efficient and safe airspace.
- Cyber-attacks are increasing and aviation did not consider this type of threat at first, but technological progress, global interconnectivity, as well as other interests make the sector vulnerable to this threat.

- It is necessary to consider the adoption of multidisciplinary approaches to work on both challenges and the adoption of tasks and agreements between the regional working groups.
- The work progress made by ICAO on emerging issues such as UAS/RPAS was noted.

4.15 The Secretariat invited the International Federation of Aeronautical Information Management Associations (IFAIMA) that presented important topics under development in AIM such as: training, NOTAM/SNOWTAM, digitization, quality, among others, that both ICAO in the WG-A Working Group and EUROCONTROL are working hard.

4.16 IFAIMA reported on the restructured Annex 15, 16th edition (2018), the complete AIS Manual (Doc 8126), 7th edition, unedited and its different parts:

Part I - Regulatory framework for aeronautical information services

Part II - Aeronautical data processing

Part III - Aeronautical information in a standardized presentation and related services

Part IV - Digital aeronautical information products and related services (pending development)

4.17 It was also discussed the alignment of Doc 8126 - *Aeronautical Information Services Manual* with Doc 10055 - *Manual on notification and publication of differences*, the 1st. Edition 2021, the generation of the complete AIS/AIM Training Manual (2021), the development of the complete AIS Quality Manual (2021), as well as the proposed amendments to Annex 4 - Aircraft with folding wingtips (alignment with Doc 8697 - *Manual of Aeronautical Charts*) and to Annex 14 - *Aerodromes*, regarding aircraft with folding wingtips.

4.18 In addition to Introduction of the Competency Based Training and Assessment (CBTA) methodology; labelling of AIP and Aeronautical information circular (AIC) amendments, AIC checklist, terminology alignment (with Doc 8126), editorial work, to Annex 15 and PANS-AIM, as well as, PANS-ABC: Consolidate the NOTAM selection criteria (Doc 8126) with the NOTAM code (PANS-ABC) and in PANS-AIM, Appendix 4 and in joint work to eliminate the old NOTAMs (old NOTAM)", suggesting to the Meeting to see the following link: <https://youtu.be/rNbF2jVT9Jo>

4.19 The preparation of a Roadmap on the AIM Quality Manual (Doc 9839) was mentioned, with the participation of United States. Additionally, on this topic the Quality of NOTAM was discussed with the participation of IATA. More details on IFAIMA's presentation can be found in **Appendix I** to this minute.

4.20 Another new and of great interest topic was the Prioritization of OPS NOTAM, that is, the OPS Classification, aligned to the AIM Operational Concept (AIM 2.0).

OPS CLASSIFICATION

Operational relevance

(opening, closing, operational limitation ...)

Question: *Can this aerodrome be used and reached?*

Accessibility

(minima, instrument procedures, means of approach, markup ...)

Question: *Does this aerodrome publication affect the performance of my flight?*

Environment

(obstacles impacting performance, work in progress, particular conditions such as ground limitations, noise abatement procedures...)

Question: *Do I have to follow restrictive or special conditions?*

« Nice to have »


(Bird hazard, activity zones aerobatics, para jumping ...)

Question: *Which additional "nice to know" not impacting the operational character?*



4.21 Finally, IFAMA presented a basic topic in the transition to AIM, the New ICAO AIM Training Manual (Doc 9991), and its proposed structure was discussed:

| | |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Based on guidance from PANS-TRG (Doc 9868) | Competency-based methodology |
| Aligned with the Air Traffic Controller (ATCO) training manual methodology | Knowledge, Skills and Abilities (KSA) within the standards and conditions |
| Based on results | ICAO framework |
| Examples included | Complete list of competencies |
| Training specification | Framework adapted from AIS |
| Competition model adapted to AIS | Select applicable competencies |
| Evidence guide | Assign observable behaviors |
| Competency checklist | Determine the standards and conditions of evaluation |
| Evaluation form | Phases and progression of training: Initial, Functional and Specialized |
| Sample curriculum | Upgrade |

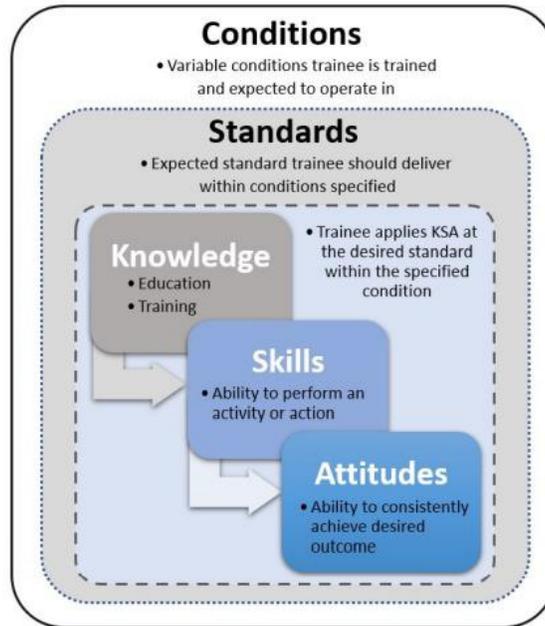



North American, Central American and Caribbean Office (NACC)
Oficina para Norteamérica, Centroamérica y Caribe (NACC)

GREPECAS Programmes and Projects Committee (PPRC) Third Virtual Meeting (ePPRC/03)
Tercera Reunión Virtual el Comité de Revisión de Programas y Proyectos (CRPP) del GREPECAS
(ePPRC/03)

Online, 31 August – 1 September 2021 / En línea, 31 de agosto – 1 de septiembre de 2021

APPENDIX A – APÉNDICE A

LIST OF PARTICIPANTS / LISTA DE PARTICIPANTES

ARGENTINA

1. Moira Callegare
2. Verónica Villarruel
3. Roxana Vasques Ferro
4. Claudia Ribero
5. Silvina Rotta
6. Susana Tribiani

BARBADOS

7. Gail Clarke

BOLIVIA

8. Reynaldo Cusi Mita
9. Jaime Yuri Alvarez Miranda

BRAZIL/BRASIL

10. Jorge Avila
11. Antonio Salles

CHILE

12. Francisco Uzieda

COLOMBIA

13. Harlen Mejia
14. Germán Velez
15. Juliana Lizarazo

COSTA RICA

16. Marco Lopez

CUBA

17. Orlando Nevot

DOMINICAN REPUBLIC/REPÚBLICA DOMINICANA

18. Héctor Porcella
19. Claudia Roa
20. Pedro Piña
21. Gender Castro
22. Betty Castaing
23. Carlos Alcántara
24. Gabriel Medina Felipe

GUATEMALA

25. Enio Pantaleón Hernandez Aguilar

MEXICO/MÉXICO

26. Edgar González Flores
27. Alvaro Perez
28. Verónica Vilchis
29. Sandra Carrera
30. Alonso Hernández
31. Fernando Ontiveros
32. Héctor Abraham García Cruz
33. Marco Villa
34. Gabriel García
35. Mario Sergio Dávalos Solis
36. María León
37. Juan Carlos Ramos
38. Sofía Manzo
39. Arturo Villela
40. Jorge Caballero
41. Alejandro Valdes Souto

- 42. José Gil
- 43. Aura Carolina Olalde Castro
- 44. Berenice Isabel Pérez García
- 45. Raúl Alcaraz y Montiel

PANAMA/PANAMÁ

- 46. Arsenio Bethancourt
- 47. Ivan de Leon
- 48. Agustin Zuñiga

PARAGUAY

- 49. José Luis Chavez
- 50. Tomas Yentzch

TRINIDAD AND TOBAGO/TRINIDAD Y TABAGO

- 51. Veronica Ramdath
- 52. Richard Halliday

UNITED STATES/ESTADOS UNIDOS

- 53. Michelle Westover
- 54. Krista Berquist
- 55. Michael Polchert
- 56. Leah Moebius

URUGUAY

- 57. Rosanna Barú

VENEZUELA

- 58. Daniela Caraballo
- 59. Kender Ferrer
- 60. Landy Palma

CANSO

- 61. Javier Vanegas

COCESNA

- 62. Gabriel Quirós Pereira

IATA

- 63. José Fernando Rojas Ocampo

IFAIMA

- 64. Iliana Sanchez Navarro

ICAO/OACI

- 65. Melvin Cintron
- 66. Fabio Rabbani
- 67. Oscar Quesada-Carboni
- 68. Julio Siu
- 69. Jaime Calderón
- 70. Raúl Martínez
- 71. Jorge Armoa
- 72. Luis Sánchez
- 73. Fabio Salvatierra
- 74. Fernando Hermoza
- 75. Mayda Ávila
- 76. Eddian Méndez
- 77. Francisco Almeida da Silva
- 78. Roberto Sosa
- 79. Rubén Martinez Lino

LIST OF PARTICIPANTS / LISTA DE PARTICIPANTES

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|---------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------|
| Argentina | | |
| Moira Callegare Directora de Proyectos de Navegación Aérea | Administración Nacional de Aviación Civil (ANAC) | E-mail mcallegare@anac.gov.ar |
| Verónica Villarruel Directora de Normas Regulaciones y Procedimientos | ANAC | E-mail vvillarruel@anac.gov.ar |
| Silvina Rotta Especialista AIS | ANAC | E-mail silvibrotta@gmail.com |
| Susana Tribiani Inspector ANS-AIS | ANAC | E-mail susanatribiani@gmail.com |
| Roxana Vasques Ferro Directora de Meteorología Aeronáutica | Servicio Meteorológico Nacional (SMN) | E-mail rvasques@smn.gov.ar |
| Claudia Ribero Dirección de Meteorología Aeronáutica | SMN | E-mail cribero@smn.gov.ar |
| Barbados | | |
| Gail Clarke Aerodromes and ATS Inspector | Barbados Civil Aviation Department | E-mail gail.clarke@barbados.gov.bb |
| Bolivia | | |
| Jaime Yuri Alvarez Miranda Director de Navegación Aérea | Dirección General de Aeronáutica Civil (DGAC) | E-mail jalvarez@dgac.gob.bo |
| Reynaldo Cusi Mita Jefe Unidad ATM/SAR | DGAC | E-mail reynaldocusi@gmail.com |
| Brazil | | |
| Jorge Avila USOAP/SSP Coordinator | Departamento de Controle do Espaço Aéreo (DECEA) | E-mail avila@decea.gov.br |
| Antonio Salles Advisor | DECEA | E-mail sallesaars@decea.mil.br |
| Chile | | |
| Francisco Uzieda Jefe Sección Navegación Aérea | Dirección General de Aeronáutica Civil (DGAC) | E-mail fuzieda@dgac.gob.cl |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|-------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------|
| Colombia | | |
| Harlen Mejia Coordinador de grupo | Unidad Administrativa Especial de Aeronáutica Civil (UAEAC) | E-mail harmafe@gmail.com |
| Juliana Lizarazo Gestión de Seguridad Operacional | UAEAC- | E-mail juliana.camargo@aerocivil.gov.co |
| Germán Velez Inspector ANS-AIS | UAEAC- | E-mail german.velez@aerocivil.gov.co |
| Costa Rica | | |
| Marco Lopez Jefe Programa Seguridad Operacional del Estado - SSP | Dirección General de Aviación Civil | E-mail mlopez@dgac.go.cr |
| Cuba | | |
| Orlando Nevot Director de Aeronavegación | Instituto de Aeronáutica Civil de Cuba | E-mail orlando.nevot@iacc.avianet.cu |
| Dominican Republic / República Dominicana | | |
| Héctor Porcella GREPECAS Chairman/ Presidente del GREPECAS | Instituto Dominicano de Aviación Civil (IDAC) | E-mail hector.porcella@idac.gov.do |
| Claudia Roa Directora de Navegación Aérea | IDAC | E-mail croa@idac.gov.do |
| Pedro Piña Director de Normas de Vuelo | IDAC | E-mail pedro.pina@idac.gov.do |
| Gender Castro Director de Seguridad Operacional | IDAC | E-mail gender.castro@idac.gov.do |
| Betty Castaing Coordinadora de Fiscalización | IDAC | E-mail bcastaing@idac.gov.do |
| Carlos Alcántara Coordinador Técnico de la Dirección General | IDAC | E-mail calcantara@idac.gov.do |
| Gabriel Medina Felipe Asesor Técnico de la Dirección General | IDAC | E-mail gabriel.medina@idac.gov.do |
| Guatemala | | |
| Enio Pantaleón Hernandez Aguilar Coordinador de Tránsito Aéreo | Dirección General de Aviación Civil | E-mail enio.hernandez@dgac.gob.gt |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------|
| Mexico / México | | |
| Edgar González Flores Subdirector de Información y Meteorología Aeronáutica | Agencia Federal de Aviación Civil (AFAC) | E-mail egonzaf@sect.gob.mx |
| Alvaro Perez Subdirector | AFAC | E-mail aperegal@sect.gob.mx |
| Verónica Vilchis Inspector Verificador Aeronáutico | AFAC | E-mail esiavilchis@gmail.com |
| Sandra Carrera Inspector Verificador Aeronáutico | AFAC | E-mail scarrera@sect.gob.mx |
| Alonso Hernández Inspector Verificador Aeronáutico | AFAC | E-mail alonso.hernandez@sect.gob.mx |
| Fernando Ontiveros Inspector Verificador Aeronáutico | AFAC | E-mail fernando.ontiveros@sect.gob.mx |
| Héctor Abraham García Cruz Inspector Verificador Aeronáutico | AFAC | E-mail hgarcicr@sect.gob.mx |
| Marco Villa Inspector Verificador Aeronáutico | AFAC | E-mail marco-avs@hotmail.com |
| Gabriel García Inspector | AFAC | E-mail gabriel.garcia@sect.gob.mx |
| Mario Sergio Dávalos Solís Director Dirección de Tránsito Aéreo | Servicios a la Navegación en el Espacio Aéreo Mexicano (SENEAM) | E-mail el_pallino@hotmail.com |
| María León Directora de Meteorología y Telecomunicaciones aeronauticas | SENEAM | E-mail maria.leon@sect.gob.mx |
| Juan Carlos Ramos Subdirector de Telecomunicaciones | SENEAM | E-mail jcrsxp@gmail.com |
| Sofía Manzo Jefe de los Servicios de Tránsito Aéreo en la Gerencia Regional Sureste | SENEAM | E-mail SPTISHA@HOTMAIL.COM |
| Arturo Villela Jefe de los Servicios de Tránsito Aéreo Noreste | SENEAM | E-mail arvivi@gmail.com |
| Jorge Caballero Jefe de Centro de Control MMID | SENEAM | E-mail jecfebles@hotmail.com |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|-----------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------|
| Mexico / México | | |
| Alejandro Valdes Souto Encargado de ATFM México | SENEAM | E-mail alevales28@hotmail.com |
| José Gil Responsable Área Normativa DTA | SENEAM | E-mail jose.gil@sct.gob.mx |
| Aura Carolina Olalde Castro Auditor SMS | SENEAM | E-mail olakro9@gmail.com |
| Berenice Isabel Pérez García Auditor SMS | SENEAM | E-mail geckoisa@gmail.com |
| Raúl Alcaraz y Montiel Analista SMS | SENEAM | E-mail ralcarazv@gmail.com |
| Panama | | |
| Arsenio Bethancourt Jefe de ATM | Autoridad Aeronáutica Civil (AAC) | E-mail arsenio.bethancourt@aeronautica.gob.pa |
| Ivan de Leon Jefe de Gestión de Navegación Aérea AIS/MET | AAC | E-mail ivan.deleon@aeronautica.gob.pa |
| Agustin Zuñiga Jefe de los servicios de control de aeródromo | AAC | E-mail agustin.zuniga@aeronautica.gob.pa |
| Paraguay | | |
| José Luis Chavez Dirección de Aeronáutica | Dirección Nacional de Aeronáutica Civil (DINAC) | E-mail joselch@gmail.com |
| Tomas Yentzch Subdirector de Navegación Aérea | DINAC | E-mail tayi68@gmail.com |
| Trinidad and Tobago / Trinidad y Tabago | | |
| Veronica Ramdath Manager Communication Navigation Surveillance | Trinidad and Tobago Civil Aviation Authority (TTCAA) | E-mail vramdath@caa.gov.tt |
| Richard Halliday CNS Engineer | TTCAA | E-mail rhalliday@caa.gov.tt |
| United States / Estados Unidos | | |
| Michelle Westover Senior Foreign Affairs Specialist, Team Lead | FAA | E-mail Michelle.Westover@faa.gov |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------|
| Krista Berquist Manager, Western Hemisphere Office, Office of International Affairs | Federal Aviation Administration (FAA) | E-mail Krista.Berquist@faa.gov |
| Michael Polchert Manager Americas and ICAO | FAA | E-mail michael.polchert@faa.gov |
| Leah Moebius ATO ICAO Lead | FAA | E-mail leah.moebius@faa.gov |
| Uruguay | | |
| Rosanna Barú Encargado División Navegación Aérea | Dirección Nacional de Aviación Civil e Infraestructura Aeronáutica (DINACIA) | E-mail rbaru@dinacia.gub.uy |
| Venezuela | | |
| Daniela Caraballo Gerente General ORI | Instituto Nacional de Aeronautica Civil (INAC) | E-mail daniela.caraballo@inac.gob.ve |
| Kender Ferrer Controlador de Trafico Aéreo Jefe II | INAC | E-mail kenderfer@gmail.com |
| Landy Palma Analista ORI | INAC | E-mail landy152@gmail.com |
| COCESNA | | |
| Gabriel Quirós Pereira Gerente Técnico | COCESNA | E-mail gabriel.quiros@cocesna.org |
| CANSO | | |
| Javier Vanegas Director Regional | CANSO | E-mail javier.vanegas@canso.org |
| IATA | | |
| José Fernando Rojas Ocampo Regional Safety Assistant Director | IATA | E-mail rojasf@iata.org |
| IFAIMA | | |
| Iliana Sanchez Navarro AIS consultant & Aeronatical cartography | Ifaima | E-mail ilianasanchez.din@gmail.com |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| ICAO / OACI | | |
| Melvin Cintron Regional Director / Director Regional | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail mcintron@icao.int |
| Fabio Rabbani Regional Director / Director Regional | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 |
| Oscar Quesada-Carboni Deputy Regional Director / Director Regional Adjunto | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail oquesada@icao.int |
| Julio Siu Deputy Regional Director / Director Regional Adjunto | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail jsiu@icao.int |
| Jaime Calderon Regional Officer, Aerodromes and Ground Aids / Especialista Regional en Aeródromos y Ayudas Terrestres | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail jcalderon@icao.int |
| Raúl Martínez Regional Officer, Aeronautical Information Management (AIM) / Especialista Regional en Gestión de Información Aeronáutica | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail rmartinez@icao.int |
| Jorge Armoa Regional Officer, Aeronautical Information Management / Aeronautical Meteorology and Environment / Especialista Regional en Gestión de la Información Aeronáutica, Meteorología Aeronáutica y Medio Ambiente | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail jarmoa@icao.int |
| Luis Sanchez Regional Officer, Aeronautical Meteorology and Environment/ Especialista Regional en Meteorología Aeronáutica y Medio Ambiente | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail lsanchez@icao.int |
| Fabio Salvatierra Regional Officer, Aerodromes and Ground Aids / Especialista Regional en Aeródromos y Ayudas Terrestres | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail fsalvatierra@icao.int |

| Name / Position Nombre / Puesto | Administration / Organization Administración / Organización | E-mail Correo-e |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| ICAO / OACI | | |
| Fernando Hermoza Regional Officer, Air Traffic Management and Search and Rescue/ Especialista Regional en Tránsito Aéreo y Búsqueda y Salvamento | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail fhermoza@icao.int |
| Mayda Ávila Regional Officer, Communications, Navigation and Surveillance/ Especialista Regional en Comunicaciones, Navegación y Vigilancia | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail mavila@icao.int |
| Eddian Méndez Regional Officer, Air Traffic Management and Search and Rescue/ Especialista Regional en Gestión de Tránsito Aéreo y Búsqueda y Salvamento | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail emendez@icao.int |
| Francisco Almeida da Silva Regional Officer, Communications, Navigation and Surveillance/ Especialista Regional en Comunicaciones, Navegación y Vigilancia | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail falmeida@icao.int |
| Roberto Sosa Regional Officer, Air Navigation Services and Safety/ Especialista Regional en Servicios de Navegación Aérea y Seguridad Operacional | South American Office (SAM) / Oficina para Sudamérica | Tel. + 511 611 8686 E-mail rsosa@icao.int |
| Ruben Martinez Lino Regional Officer, Accident Investigation / Especialista Regional en Investigación de Accidentes | North American, Central American and Caribbean Office / Oficina para Norteamérica, Centroamérica y Caribe (NACC) | Tel. + 52 55 5250 3211 E-mail RGMLino@icao.int |

**APPENDIX B
AGENDA**

Agenda Item 1: Adoption of the Provisional Agenda, Schedule and Working Method

Agenda Item 2: Follow-up on GREPECAS Programmes and Projects

- 2.1 Reviewed GREPECAS Programmes and Projects
- 2.2 Air Navigation Services (ANS) Implementation in the CAR/SAM Regions
- 2.3 GREPECAS ANS Dashboard Initiative

Agenda Item 3: Organizational and Administrative Activities of the GREPECAS

- 3.1 Follow-up to outstanding GREPECAS Conclusions/Decisions
- 3.2 Follow-up to the GREPECAS Improvements
- 3.3 GREPECAS–RASG-PA Coordination
- 3.4 GREPECAS Plenary Meeting and Successive Back-to-back Meeting with RASG-PA and their periodicity
- 3.5 CAR/SAM Air Navigation Plan (ANP) Vol. III Planning

Agenda Item 4: Other Business

APPENDIX C
VALID CONCLUSIONS AND DECISIONS

| Decision/ Conclusion | Title | Date of completion | Responsible | Comments |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GREPECAS 18/1 | ACTIONS FOR ATFM IMPLEMENTATION IN THE CAR REGION | Undetermined in the recoding of GREPECAS 18 Conclusions and background | a) States and Territories in the CAR Region b) ICAO NACC Regional Office | Valid |
| GREPECAS 18/3 | REVISION OF THE MET PROGRAMME AND ITS TASKS | Undetermined in the recoding of GREPECAS 18 Conclusions | <i>States</i> | States continue to be encouraged to submit their ISO certifications. The ePPRC/02 was recommended to analyse the implementation of the QMS in light of the most recent provisions of Annex 3 and the costs that ISO implementation demands. Pending response from the PPRC. |
| GREPECAS 18/4 | DEVELOPMENT OF AIR NAVIGATION PLANS ALIGNED WITH THE GANP AND THE REGIONAL PERFORMANCE-BASED AIR NAVIGATION PLANS | Superseded given the entry into force of the GANP 6th Edition. Superseded by the new Draft Conclusion PPRC/05/10 | | |
| GREPECAS 18/6 | RESOLUTION OF AERONAUTICAL METEOROLOGY DEFICIENCIES | <i>December 2016</i> | States | CAR States have received assistance for the implementation of the qualification, competencies and training requirements of the Aeronautical Meteorology Program (PMA). |
| GREPECAS 18/7 | POSTPONEMENT OF THE APPROVAL OF VOL. III OF CAR/SAM eANP | Superseded given the entry into force of the GANP 6th Edition. Superseded by the new Draft Conclusion PPRC/05/10 | | |

| Decision/ Conclusion | Title | Date of completion | Responsible | Comments |
|-------------------------|------------------------------------------------------------------------|----------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GREPECAS 18/13 | SAFETY MANAGEMENT IMPLEMENTATION | Implementation development in progress | States | Valid Pending comment for recent updates in activities and the change in Flight Safety position. However, the implementation process of Operational Safety Management is in progress |
| GREPECAS 18/14 | ENHANCEMENT OF SOUTH ATLANTIC (SAT) GROUP STRUCTURE | June 2020 | ICAO HQ SAT Group | Completed Sponsored by ICAO HQ, two Atlantic Coordination Meetings (ACM) were held, resulting in the restructuring of the SAT Group, creating the Implementation Management Group for the Atlantic (SAT IMG) to develop the SAT Vision, CONOPS and work plans. |
| GREPECAS 18/15 | INTERFACE CONTROL DOCUMENTS FOR AIDC IMPLEMENTATION | April 2018 | CAR and SAM States | Completed The AIDC/ASIA PAC version 3.0 protocol was adopted between the adjacent control centres between the CAR and SAM Regions. The interconnections among SAM States will also use the AIDC/ASIA PAC version 3 protocol. The CAR Region and the States adjacent to the United States will use the NAM/ICD Version E protocol or higher. |
| GREPECAS 18/16 | SHORT-TERM IMPLEMENTATION BY THE STATES OF AIDC FUNCTIONALITY | May 2019 | CAR and SAM States | Completed The SAM Region Implementation Group (SAM/IG) has created the Interoperability Task Force (Interop TF), which activated two subgroups |

| Decision/ Conclusion | Title | Date of completion | Responsible | Comments |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | | to deal with issues related to AIDC implementation and errors mitigation and flight plans duplication/multiplicity (ATM/AIDC Subgroup and ATM/FPL Subgroup). |
| GREPECAS 18/21 | SUPPORT TO GTE AND CARSAMMA ACTIVITIES TO IMPROVE THE ANALYSIS OF INFORMATION ON DEVIATIONS IN RVSM AIRSPACE | PPRC/05 | a) States / International Organizations and CARSAMMA b) CARSAMMA and GTE c) States / International Organizations, in coordination with CARSAMMA and ICAO Regional Offices d) GTE | Still valid due to various pending activities. |
| PPRC/05/10 | DEVELOPMENT OF VOLUME III OF THE CAR/SAM eANP IN PREPARATION OF NATIONAL AIR NAVIGATION PLANS | Before 2021 | Stakeholders | Valid Guided by NACC and SAM DRDs, as indicated during interregional coordination meetings. |
| PPRC/05/13 | INCLUSION OF THE AERONAUTICAL REQUIREMENT OF TROPICAL CYCLONE ADVISORY INFORMATION FOR THE WESTERN SOUTH ATLANTIC | GREPECAS/19 | SAM RO/MET | SAM RO/MET advances with the procedures before HQ in coordination with NACC RO/MET |
| PPRC/05/08 | REVIEW OF MET PROGRAMME AND ITS PROJECTS | 30 November 2019 | Programme H Project Coordinators | In reformulation according to ePPRC/01/03 and what is required by ePPRC/02 |
| ePPRC/01/01 | STATUS OF IMPLEMENTATION OF THE AUTOMATED MANAGEMENT SYSTEM OF GREPECAS | 26 June 2020 | GREPECAS Chairperson | The new GREPECAS Chairpersonship confirms this commitment and its implementation will continue |

| Decision/ Conclusion | Title | Date of completion | Responsible | Comments |
|---------------------------------|------------------------------------------------------------------------------------------------|-------------------------------|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| ePPRC/01/03 | REVIEW OF THE CURRENT PPRC PROGRAMMES AND PROJECTS | 30 November 2020 | States and ICAO | The Secretariat proposes to hold one or more evaluation meetings of the GREPECAS Projects for the CAR/SAM Regions and meet the stipulated date |
| ePPRC/02/01 | PRESENTATION OF REVISED GREPECAS PROJECTS | 8 February 2021 | Coordinators | During the specific project presentation and review meeting, the required update was concluded. |
| ePPRC/02/02 | CAR/SAM REGIONS ATFM DOCUMENTATION UPDATE | | States | The documentation has been duly updated. |
| ePPRC/02/03 | REVIEW OF THE A-CDM IMPLEMENTATION PLAN PROPOSAL | 8 February 2021 | States | A new version of the Plan was presented in both languages and was included on the GREPECAS website. |
| ePPRC/02/04 | COORDINATION FOR THE IMPLEMENTATION AND ASSISTANCE TO THE STATES IN UAS/RPAS AND CYBERSECURITY | ePPRC/03 | ICAO | Various webinars and coordination workshops have been held for both topics, most of them guided by NACC RO/CNS. |
| ePPRC/02/05 | RASG-PA/GREPECAS COORDINATION | Immediate | States Coordinators ICAO | Coordination between both Groups has been made in various and constant ways between the CAR and SAM Regional Offices with the ROs involved. |
| ePPRC/02/06 | GREPECAS 2021 MEETINGS PROGRAMME | Immediate | States | An events programme that includes 2022 was concluded and coordinated |

APPENDIX D

Tabla del estado de las actividades de mejora propuestas al GREPECAS (Fase 1)
Status improvement Table of the activities proposed to GREPECAS (Phase 1)

| Área/Area | Descripción/Description | | Status |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Diagnóstico | 1 | Crear un compendio con las deficiencias detectadas en las tres reuniones anteriores Create a compendium with the deficiencies detected in the three previous meetings | 75% |
| Diagnosis | 2 | Priorizar las deficiencias detectadas / Prioritize the deficiencies detected | 50% |
| Requerimientos del Sistema de Gestión Ver. Beta en IDAC Management System Requirements Beta Ver. in IDAC | 3 | Desarrollar una tarjeta de puntuación equilibrada / Develop a balanced scorecard | Sustituido por DASHBOARD En Progreso fase inicial |
| | 4 | Desarrolle un mecanismo de control y seguimiento del proyecto con alertas tempranas para acciones vencidas Develop a project monitoring and control mechanism with early alerts for overdue actions | |
| | 5 | Mecanismo para medir los impactos de los programas y proyectos a través de indicadores Mechanism to measure the impacts of programs and projects through indicators | Replaced by DASHBOARD In Progress initial phase |
| | 6 | Generación de Informes en tiempo real desde la Plataforma Generation of reports in real time from the Platform | |
| | 7 | Asignar horas al personal colaborativo por: año, Reunión, Licencias médicas, Vacaciones, etc. Assign hours to collaborative staff by: year, Meeting, Medical leave, Vacation, etc. | |
| | 8 | Alerta de sobrecarga del recurso / Resource overload alert | 10% |
| | 9 | Cargar estructura de desglose de trabajo estándar predeterminado por proyecto Load Default Standard Work Breakdown Structure By Project | |
| | Software del Sistema System Software | 10 | Crear plantillas adicionales / Create additional templates |
| 11 | | Desarrollar requisitos del sistema / Develop system requirements | |
| 12 | | Crear sistema automatizado para la gestión de programas y proyectos de GREPECAS Create automated system for managing GREPECAS programs and projects | Replaced by DASHBOARD In Progress initial phase |
| 13 | | Crear versión en línea para el Sistema / Create online version for the System | |
| 14 | | Definir roles, funciones y responsabilidades Define roles, functions and responsibilities | |
| 15 | | Crear un correo para difundir los mensajes de alerta Create an email to broadcast the alert messages | 10% |
| 16 | | Crear bloques para filtros / Create blocks for filters | |
| 17 | | Crear enlaces entre objetivos estratégicos, programas y proyectos Create links between strategic objectives, programs and projects | 10% |
| 18 | Implementación y prueba de versión en línea / Online version testing and deployment | | |
| Estructura de GREPECAS GREPECAS structure | 19 | Revisar la estructura actual y el Manual de procedimientos (AMDts)-Circular Estados- Review the current structure and the Procedures Manual (AMDts) -Circular States- | 100% |
| | 20 | Proponer una nueva Estructura para apoyar mejor los proyectos Propose a new Structure to better support projects | En espera On hold 2022 |
| | 21 | Revisar las funciones, roles y responsabilidades y proponga ajustes en caso necesario. Nuevos términos de referencia. Actualización de PoC de GRP Review the functions, roles and responsibilities and propose adjustments if necessary. New terms of reference. GRP PoC upgrade | 100% |
| | 22 | Crear el Grupo de trabajo de "Data Analysis"/ Create the "Data Analyzes" Working Group | 100% |
| | 23 | Revisar las funciones y responsabilidades de la interacción GREPECAS RASG-PA. "GAP Analysis Ad-HOC Group" - Respuesta pendiente del Grupo Review the functions and responsibilities of the GREPECAS RASG-PA interaction. "GAP Analysis Ad-HOC Group" - Pending response from the Group | 90% |
| | 24 | Realizar capacitación basada en los nuevos requisitos de perfiles Conduct training based on new profile requirements | En espera On hold 2022 |
| Página WEB del GREPECAS GREPECAS WEBSITE | 25 | Revisar la página WEB para depuración / Check the WEB page for debugging | 65% |
| | 26 | Revisar estructura de la página WEB / Review structure of the WEB page | 75% |
| | 27 | Recomendar mejoras a la estructura de la pagina / Recommend improvements to the structure of the page | 90% |
| Cambio de Imagen del GREPECAS GREPECAS Image Change | 28 | Realizar estrategia de re-lanzamiento de GREPECAS / Carry out GREPECAS re-launch strategy | 35% |
| | 29 | Plan de marketing / Marketing plan | 80% |
| | 30 | Encuesta a Estados miembros y análisis de datos / Member State survey and data analysis | 65% |
| | 31 | Sensibilización de los Estados / State awareness | 20% |
| | 32 | Difusión sobre los acontecimientos en la gestión de GREPECAS Dissemination of events in the management of GREPECAS | En espera On hold 2022 |
| Actividades hacia el GREPECAS 19 Activities towards GREPECAS 19 | 33 | Agenda propuesta se presentó a DRD / Proposed agenda was presented to DRD | 80% |
| | 34 | CAR/SAM Coordinación / CAR/SAM Coordination | 30% |
| | 35 | NACC ANS ROs Coordinación NACC ANS ROs Coordination | En espera On hold 2022 |

APPENDIX E

**ASSISTANCE FOR THE FORMULATION AND MANAGEMENT
OF VOL III OF THE CAR/SAM ANP**

**ASSISTANCE FOR THE FORMULATION AND MANAGEMENT OF VOLUME III OF THE CAR/SAM ANP
(REV. 3)**

- OUTPUT** > VOLUME III of the CAR/SAM ANP aligned with the GANP and the ASBU methodology.
- OUTCOME** > Implementation of ASBU elements/modules to improve air navigation performance in the CAR/SAM Region, applying a consistent, measurable and cost-effective process.
- BENEFITS** > Airspace and ANS services: operationally safe, effective and interoperable.
Main airports: with ACDM and/or demand/capacity management.
Environment: reduction of CO2 emissions*

** To be defined: The proposal is to reduce CO2 emissions by 150,000 tons between May 2024 - May 2028, through the implementation of GANP operational threads (APTA, ACDM, FRTO, NOPS, etc.). Calculations based on IFSET.*

| | | |
|-----------------------|-------|--------------------------------------------------------------------|
| Abbreviations: | NNV | NACC regional air navigation officers (MA, JC, RM, LS) |
| | SNV | SAM regional air navigation officers (JA, RS, FS, FA) |
| | ANB | Air Navigation Bureau / ANB Officer Olga de Frutos (ODF) |
| | DRD | Regional deputy directors (OQ, JS) |
| | STOs | States/Territories/Organisations |
| | GV3 | GREPECAS project for the management of Vol. III of the CAR/SAM ANP |
| | ANIWG | CAR implementation group |
| | SAMIG | SAM implementation group |
| | COORD | Subproject coordinators - ATM/SAR officers (FH, EM) |

See Explanatory Notes in the last Table

(6) ASSISTANCE FOR THE FORMULATION AND MANAGEMENT OF VOLUME III OF THE CAR/SAM ANP

Note. - Following the Secretariat's GANTT numbering.

<<<<

| <i>Description of activities</i> | <i>Start</i> | <i>End</i> | <i>Responsible party</i> | <i>Remarks</i> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|-----------------------------|----------------|
| (6.1) Regional planning concepts and methods contained in the GANP 6th ed. | | | | |
| (6.1.1) Virtual meeting 1 <ul style="list-style-type: none"> Review of GANP methodology and website Gap analysis for managing KPIs and selecting ASBU elements | 15 April 2021 | 15 April 2021 | COORD NNV SNV | COMPLETED |
| (6.1.2) Virtual meeting 2 <ul style="list-style-type: none"> Coordination for drafting and defining the contents of the Instructions to States on the implementation of the template for Volume III Continue ASBU implementation in the CAR and SAM Regions | 16 April 2021 | 16 April 2021 | COORD NNV SNV | COMPLETED |
| (6.2) Drafting of Instructions on the use of the template for Volume III of the Regional air navigation plan | | | | |
| (6.2.1) Development of DRAFT Instructions, including the implementation phase | 15 April 2021 | 7 June 2021 | COORD | COMPLETED |
| (6.2.2) Virtual meeting 3. DRAFT validation | 8 June 2021 | 9 June 2021 | COORD NNV SNV DRDS | COMPLETED |
| (6.2.3) DRAFT translation and editing | 11 June 2021 | 25 June 2021 | COORD | COMPLETED |
| (6.2.4) Instructions approved by GREPECAS/PPRC | 16 August 2021 | 18 August 2021 | E PPRC 03 | |

| <i>Description of activities</i> | <i>Start</i> | <i>End</i> | <i>Responsible party</i> | <i>Remarks</i> |
|---------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|-----------------------------------|----------------|
| (6.3) Workshops with States/Territories/Organisations (STOs) | | | | |
| (6.3.1) Promote / coordinate the creation of the work team in each STO, for its participation in workshops | 23 August 2021 | 10 September 2021 | DR DRD COORD | |
| (6.3.2) Deliver CAR workshop. Initial tables prepared by STOs. | 27 September 2021 | 10 November 2021 | NNV STOs | |
| (6.3.3) Deliver SAM workshop. Initial tables prepared by STOs. | 27 September 2021 | 10 November 2021 | SNV STOs | |
| (6.3.4) 1st feedback from industry / stakeholders IATA - CANSO – IFALPA – ACI LAC, etc. | 15 November 2021 | 20 November 2021 | DRD ANB COORD NNV SNV | |
| (6.3.5) Deliver CAR/SAM workshop with all STOs. Consolidation. | 1 February 2022 | 18 February 2022 | NNV SNV STOs | |
| (6.3.6) Follow-up to CAR/SAM workshop. Delivery of tables by STOs. Tables in final draft version prepared by STOs. | 21 February 2022 | 11 March 2022 | NNV SNV STOs | |
| (6.3.7) 2nd feedback from industry / stakeholders IATA - CANSO – IFALPA – ACI LAC, etc. | 15 March 2022 | 18 March 2022 | COORD NNV SNV | |
| (6.3.8) Final editing of tables and SP/EN translation. | 21 March 2022 | 31 March 2022 | COORD | |
| (6.4) Formulation of Volume III of the CAR/SAM ANP with the participation of STOs | | | | |
| (6.4.1) Consolidation of draft 1.0 of Volume III of the CAR/SAM ANP. Validation by NACC RO and SAM RO. | 4 April 2022 | 13 April 2022 | COORD NNV SNV DRD | |

| <i>Description of activities</i> | <i>Start</i> | <i>End</i> | <i>Responsible party</i> | <i>Remarks</i> |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|------------------------------|----------------|
| (6.4.2) Submit to STOs for objections or feedback. Submit to GREPECAS for approval. | 20 April 2022 | 13 May 2022 | COORD STOs | |
| (6.4.3) Approval of Volume III by GREPECAS/PPRC. Submit the PfA to HQ Montreal. | 9 May 2022 | 6 June 2022 | GREPECAS/PPRC COORD | |
| (6.5) Formulation of the new programme/project “Management of Volume III of the CAR/SAM ANP – GV3” | | | | |
| (6.5.1) Formulate the draft GV3 scheme | 1 September 2021 | 10 September 2021 | COORD NNV SNV | |
| (6.5.2) Consolidate the draft GV3. Edit and translate. Submit to GREPECAS | 13 September 2021 | 8 October 2021 | COORD | |
| (6.5.3) Approval of GV3 by GREPECAS/PPRC | 27 October 2021 | 29 October 2021 | GREPECAS 19 | |
| (6.6) Updating or replacement of GREPECAS projects ABCDEFGH | | | | |
| (6.6.1) Analysis for the update or replacement of projects ABCDEFGH, to be taken over by Regional Offices (with ANIWG and SAMIG) | 2 November 2021 | 22 November 2021 | COORD NNV SNV | |
| (6.6.2) Validation/approval of approaches. Definition of transition process with DRDs | 29 November 2021 | 7 December 2021 | COORD NNV SNV DRDS | |
| (6.6.3) Draft the <u>revised projects</u> for implementation of ASBU elements stipulated in Volume III | 10 January 2022 | 8 April 2022 | COORD NNV SNV ANIWG | |

| <i>Description of activities</i> | <i>Start</i> | <i>End</i> | <i>Responsible party</i> | <i>Remarks</i> |
|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------|---------------------------------------|----------------|
| | | | SAMIG | |
| (6.6.4) Draft the <u>new projects</u> at the Regional Offices for the implementation of ASBU elements stipulated in Volume III | 10 January 2022 | 8 April 2022 | COORD NNV SNV ANIWG SAMIG | |
| (6.6.5) Approval by GREPECAS of revised or, where applicable, new projects ABCDFGH | 9 May 2022 | 6 June 2022 | GREPECAS | |
| (6.7) Preparation for deactivation of CAR /RPB- RPBANIP and SAM/PBIP | | | | |
| (6.7.1) Analysis for CAR/RPBANIP deactivation. Define the approach. | 10 January 2022 | 8 April 2022 | COORD NNV | |
| (6.7.2) Analysis for SAM/PBIP deactivation. Define the approach. | 10 January 2022 | 8 April 2022 | COORD SNV | |
| (6.7.3) Validation /approval of approaches. Specify transition process with DRDs. | 18 April 2022 | 29 April 2022 | COORD DRDS | |
| (6.7.4) Approval by GREPECAS of RPBANIP and PBIP deactivation | 9 May 2022 | 6 June 2022 | GREPECAS | |
| (6.8) Start of implementation of Volume III and project modifications, and new GV3 management. Deactivation of RPBANIP and PBIP | | | | |
| (6.8.1) Start of programme/project “Management of Volume III of the CAR/SAM ANP - GV3” | 1 August 2022 | | | |
| (6.8.2) Entry into force of Volume III of the CAR/SAM ANP | 1 August 2022 | | | |
| (6.8.3) Entry into force of revised or new projects ABCDFGH | 1 August 2022 | | | |

| <i>Description of activities</i> | <i>Start</i> | <i>End</i> | <i>Responsible party</i> | <i>Remarks</i> |
|------------------------------------------|----------------------|------------|--------------------------|----------------|
| (6.8.4) Deactivation of RPBANIP and PBIP | 1 August 2022 | | | |

<<<<<<<

MILESTONES

| Activity | Dates | Notes |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------|
| Tentative date of approval by GREPECAS/PPRC of the Instructions on the use of the template for Volume III of the Regional air navigation plan | 18 August 2021 | Immediate application |
| Tentative date of approval by GREPECAS/PPRC of the programme/project “Management of Volume III of the CAR/SAM ANP - GV3” | 29 October 2021 | Date of application 1 August 2022 |
| Tentative date of approval by GREPECAS of Volume III of the CAR/SAM ANP. Formalities before ICAO. | 6 June 2022 | Date of application 1 August 2022 |
| Tentative date of approval by GREPECAS of the revised or new projects ABCDFGH | 6 June 2022 | Date of application 1 August 2022 |
| Tentative date of approval by GREPECAS of the deactivation of RPBANIP and PBIP | 6 June 2022 | Date of application 1 August 2022 |

<<<<<<<

EXPLANATORY NOTES

| | |
|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| (6.1) Regional planning concepts and methods contained in the GANP 6th Ed. | DEFINE COMMON DENOMINATORS REGARDING REGIONAL PLANNING AND THE GANP. |
| (6.2) Drafting of Instructions on the use of the template for Volume III of the Regional air navigation plan | ENSURE HOMOGENEOUS IMPLEMENTATION BY STATES OF THE TEMPLATE FOR VOLUME III ALIGNED WITH THE GANP. |

| | |
|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (6.3) Workshops with States/Territories/Organisations (STOs) | CREATE STO TEAMS, CIRCULATE THE INSTRUCTIONS IN THE CAR AND SAM REGIONS. PROVIDE TRAINING IN THE USE OF TABLES AND BUILD CAPACITIES IN MEASUREMENT OF KPIS AND/OR REGIONAL METRICS |
| (6.4) Formulation of Volume III of the CAR/SAM ANP with participation of STOs | FORMULATE VOLUME III BASED ON THE DELIVERABLES OF CAR/SAM STATES/TERRITORIES/ORGANISATIONS |
| (6.5) Formulation of the new programme/project “Management of Volume III of the CAR/SAM ANP – GV3” | FORMULATE THE NEW GREPECAS PROJECT FOR MANAGEMENT OF VOLUME III IN ORDER TO FACILITE THE IMPLEMENTATION OF THE PRESCRIBED ASBU ELEMENTS AND MEASURE REGIONAL PERFORMANCE |
| (6.6) Update or replacement of GREPECAS projects ABCDFGH | UPDATE OR, WHERE APPLICABLE, REPLACE GREPECAS PROJECTS ABCDFGH, TO BE TAKEN OVER BY THE REGIONAL OFFICES |
| (6.7) Preparation for deactivation of the CAR/RPB-RPBANIP and the SAM/PBIP | PREPARE TO DEACTIVATE CAR /RPBANIP AND SAM/PBIP, COMPLETING ALIGNMENT WITH GANP |
| (6.8) Entry into force of Volume III and project modifications and new GV3 management. Deactivation of RPBANIP and PBIP. | ENTRY INTO FORCE OF VOL. III, DEACTIVATION OF CAR /RPBANIP AND SAM/PBIP. FULL ALIGNMENT OF CAR/SAM ANP WITH GANP 6TH ED. |

-

APPENDIX F

**INSTRUCTIONS FOR USE OF THE TEMPLATE FOR VOLUME III OF
THE REGIONAL AIR NAVIGATION PLAN – CAR/SAM ANP**



**INTERNATIONAL CIVIL AVIATION ORGANIZATION
SOUTH AMERICAN REGIONAL OFFICE**

**INSTRUCTIONS FOR USE OF THE TEMPLATE FOR
VOLUME III OF THE REGIONAL
AIR NAVIGATION PLAN – CAR/SAM ANP**

| | |
|----------------|--------------------|
| Version | Draft 1.1 |
| Date | 8 July 2021 |

**INSTRUCTIONS FOR USE OF THE TEMPLATE FOR VOLUME III OF THE
REGIONAL AIR NAVIGATION PLAN - CAR/SAM ANP**

CHANGE CONTROL

| Version | Date | Change | Pages |
|----------------|--------------|------------------------|--------------|
| Draft 1.0 | 30 June 2021 | ----- | ----- |
| Draft 1.1 | 8 July 2021 | Validation NACC/SAM | |
| | | | |
| | | | |
| | | | |

Table of contents

| | | |
|-----|-----------------------------------------------------|----|
| 1. | INTRODUCTION | 5 |
| 1.1 | Reference documents..... | 5 |
| 1.2 | Definitions | 5 |
| 1.3 | Acronyms..... | 5 |
| 1.4 | ICAO-driven planning..... | 6 |
| 1.5 | References for developing Vol. III | 6 |
| 1.6 | Purpose | 7 |
| 1.7 | Scope | 7 |
| 2. | GENERAL ASPECTS AND REQUIREMENTS | 8 |
| 2.1 | Personnel and data requirements | 8 |
| 3. | BASIC CONCEPTS | 9 |
| 3.1 | Performance-based approach (PBA) | 9 |
| 3.2 | Key performance area (KPA) | 9 |
| 3.3 | Key performance indicator (KPI) and metrics..... | 10 |
| 3.4 | ASBU Framework | 11 |
| 4. | PROCEDURES | 11 |
| 4.1 | Planning and implementation in progress..... | 11 |
| 4.2 | Formulation of the planning tables in Vol. III..... | 18 |

Appendix A – GANP KPI Overview

Appendix B – GANP ASBU threads

Appendix C - Regional SWOT analysis examples

Appendix D - ASBU elements of operational thread

Attachment – ANP VOL III TEMPLATE

1. INTRODUCTION

1.1 Reference documents

- Doc 9750, GANP, Sixth edition 2019 <https://www4.icao.int/ganportal/>
- Doc 9854 Global air traffic management operational concept (GATMOC)
- Doc 9883 Manual on Global performance of the air navigation system
- Doc 9882 Manual on ATM system requirements

1.2 Definitions

Note: Sources and references are from Doc 9883

SWOT analysis. Strengths, weaknesses, opportunities and threats (SWOT) analysis is a business management term used to denote the analysis of a system or organization with the aim of developing an inventory of present and future strengths, weaknesses, opportunities and threats that may require performance management attention (Chapter 2, 2.3.2 and Appendix D, 3.2.7 refer).

Key performance area (KPA). KPAs are a way of categorizing performance subjects related to high-level ambitions and expectations. ICAO has defined 11 KPAs: safety, security, environmental impact, cost effectiveness, capacity, flight efficiency, flexibility, predictability, access and equity, participation and collaboration, interoperability (Chapter 2, 2.2.4, Appendix A, Figure I-A-2 and 3.3 refer).

Performance management process. This term refers to a repetitive or continuous process which applies the principles of the performance-based approach to manage (generally improve) selected performance aspects of an organization or system (*i.e.* the air navigation system). The process is executed through a sequence of well-defined steps, which are described in Chapter 2, Figure I-2-1.

Examples of performance management processes are safety management, security management, and capacity management.

1.3 Acronyms

| | |
|--------|---------------------------------------------------|
| A-CDM | Airport collaborative decision-making |
| AN-SPA | Air navigation system performance assessment |
| ASBU | Aviation system block upgrades |
| PPRC | GREPECAS programmes and projects review committee |
| DCB | Demand-capacity balancing |
| FUA | Flexible use of airspace |
| GANP | Global air navigation plan (Doc 9750) |
| GASP | Global aviation safety plan (Doc 1004) |
| KPI | Key performance indicator |

| | |
|---------|-------------------------------------------------------------------|
| KPA | Key performance area |
| PBA | Performance-based approach |
| PBN | Performance-based navigation |
| RPBANIP | CAR Regional performance-based air navigation implementation plan |
| SAMPBIP | SAM performance-based air navigation system implementation plan |
| TBD | To be determined |
| Vol. | Volume |

1.4 ICAO-driven planning

The International Civil Aviation Organization (ICAO) has developed Doc 9854 “Global ATM operational concept”, which describes the ICAO vision of a globally applicable ATM.

It also developed the global "Aviation System Block Upgrade" (ASBU) framework as a programmatic framework that presents a set of air traffic management (ATM) solutions or upgrades that builds on existing equipment and establishes an implementation framework to achieve global interoperability within given timelines.

The Sixth edition of the Global Air Navigation Plan (GANP - Doc 9750) enables members of the aviation community to participate together to achieve an agile, safe, secure, sustainable, high-performance and interoperable global air navigation system.

At the same time, new demands on the aviation system, emerging technologies, innovative ways of doing business and the changing human role pose challenges and also offer opportunities that call for an urgent transformation of the air navigation system so that aviation continues to drive social well-being in the CAR and SAM Regions.

1.5 References for developing Vol. III

Conclusion PPRC/05-10 – Development of Volume III of the CAR/SAM e-ANP and preparation of national air navigation plans (NANPs), the main purpose of which is to coordinate efforts for the development of Vol. III of the CAR/SAM e-ANP and update the national air navigation plans.

AN/Conf-13 recommendation 4.3/1, item d) “encourage the planning and implementation regional groups (PIRGs) to embrace a performance-based approach for implementation and adopt the six-step performance management process, as described in the *Manual on Global Performance of the Air Navigation System* (Doc 9883), by reflecting the process in Volume III of all regional air navigation plans”.

1.6 Purpose

The Instructions will be used by CAR/SAM States when preparing the tables and texts of Volume III of the CAR/SAM ANP, in accordance with the template provided by ICAO Headquarters (see the Attachment at the end of this document).

These Instructions address the following objectives:

- a. Standardise the understanding and practical application of the six-step approach to performance-based planning, as stipulated in the GANP, by area navigation specialists of CAR/SAM States in the process of filling in the Tables of Vol. III.
- b. Achieve a homogeneous application of the Vol. III template and simplify the development of tables and texts.
- c. Complement the use of the GANP tools (AN-SPA, performance dashboard, etc.).
- d. Carry out an orderly transition of the plans and activities under the RPBANIP and the SAM-PBIP to the CAR/SAM ANP Vol. III.

The cited template is based on a printed format, which describes a sequence of tables that guide the insertion of planning data of each State/Territory, linked to designated airspaces and international airports, following the identification of air navigation performance optimisation objectives, leading to the definition of solutions derived from the ASBU framework or other regional initiatives. In the future, this template will be prepared in electronic format by ICAO, with a view to automating the management and updating of data and the monitoring of implementation activities.

1.7 Scope

1.7.1 Vol. III contains the dynamic/flexible elements of the CAR/SAM ANP and provides guidance for the implementation of air navigation systems and their upgrading, taking into account the ASBU framework as well as GANP technology roadmaps. Vol. III may also include additional implementation guides to supplement the material contained in Vol. I and Vol. II.

1.7.2 The six-step method of Doc 9883 is applied for the **drafting** and subsequent **management** of Vol. III, as follows:


In the drafting phase:

- Step 1: Define/review scope, context and general ambitions/expectations
- Step 2: Identify opportunities, issues and set (new) objectives
- Step 3: Quantify objectives
- Step 4: Select solutions to exploit opportunities and resolve issues

In the management phase:

- Step 5: Implement solutions
- Step 6: Assess achievement of objectives

These instructions focus on the drafting phase of Vol. III based on the template provided. See Graph 1 below.

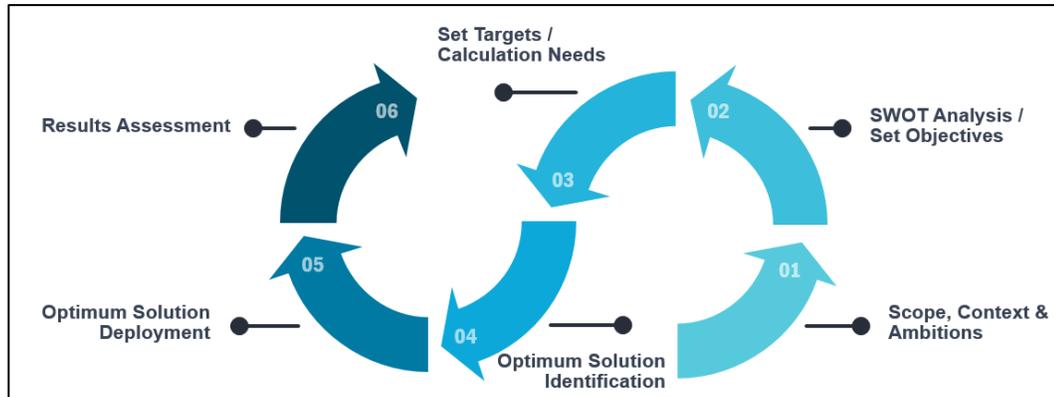

Graph 1.- Six-step performance management process

1.7.3 Once Vol. III has been developed, it must be approved by GREPECAS/PPRC and the implementation phase will start, which should be supported by a programme/project aimed at developing and/or continuing the action plans for the implementation of the solutions identified from the ASBU framework. These solutions, if applicable, will be supplemented with regional initiatives (also called non-ASBU solutions) as outlined in Step 4 of the method. This entails managing indicators and metrics to make sure that the process is delivering the expected performance results.

1.7.4 Vol. III, as approved by GREPECAS, shall have its respective amendment procedures, in accordance with the framework set forth in Volume I, Appendix A, Part C.

2. GENERAL ASPECTS AND REQUIREMENTS

2.1 Personnel and data requirements

2.1.1 The drafting of Volume III is done by GREPECAS State representatives, assisted by officers of the NACC and SAM Regional Offices. State counterparts should have the authority and/or designate a working group (WG) within their Administration to coordinate the drafting of Volume III with all the stakeholders. Such a group should be multidisciplinary in nature and have a coordinator to act as focal point (POC) for this Regional Office and, at the same time, to be the spokesperson for the State, supported by the following human and technological resources:

- a. Specialists and technicians from:

- ✓ the CAA;
 - ✓ the air navigation service providers (ATS, ATFM, CNS, MET, AIM, SAR areas) and airports;
 - ✓ the State environmental agency;
 - ✓ the industry;
 - ✓ the users
- b. IT technicians and statisticians with expertise in business intelligence (BI) tools
 - c. IT tools for efficient collection, analysis and management of air traffic data
 - d. Collaborative arrangements with data originators to meet data quality requirements

2.1.2 Data management

Data management is the process of data collection, processing (including quality assurance), storage and reporting in support of the performance-based approach. In practical terms, data management is about:

- a. how to set up the data acquisition process needed for performance monitoring;
- b. how to aggregate performance data and exchange the data among States and planning groups;
- c. how groups can best manage their information base in which performance data are stored; and
- d. how to organise performance evaluations.

The entities that will act, in each State, as performance data providers must be defined. Appendix A describes the KPIs and identifies, for reference, the required data and data providers for each KPI.

3. BASIC CONCEPTS

3.1 Performance-based approach (PBA)

The performance-based approach is a decision-making method based on three principles: strong focus on desired/required results; informed decision-making, driven by those desired/required results; and reliance on facts and data for decision-making. The PBA is a way of organising the performance management process.

3.2 Key performance area (KPA)

KPAs are a way of categorising performance subjects related to high-level ambitions and expectations (see the summary below).

ICAO has defined eleven KPAs: safety, security (cybersecurity), environmental impact, cost effectiveness, capacity, flight efficiency, flexibility, predictability, access and equity, participation and collaboration, interoperability.

Summary of GANP efficiency ambitions

| KPA | Ambition |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| ACCESS AND EQUITY | No aviation community member excluded or treated unfairly. |
| CAPACITY | Nominal capacity easily scalable with demand. |
| | Disruptive events do not interrupt service provision and do not significantly affect the performance of the system. |
| COST-EFFECTIVENESS | No increase of total direct ANS cost while maintaining the safety and quality of service. |
| | Significant increase of ANS productivity, irrespective of demand. |
| EFFICIENCY | Reduction of the gap between the flight efficiency achieved and the desired optimum trajectory of airspace users. |
| ENVIRONMENT | ANS-induced inefficiencies to be progressively removed to contribute to the global ICAO aspirational goals for CO ₂ emissions. |
| | To benefit from achieved flight efficiency gains. |
| FLEXIBILITY | To absorb required changes to individual business and operational trajectories. |
| INTEROPERABILITY | Essential at an operational and technical level. |
| PARTICIPATION BY THE ATM COMMUNITY | Pre-agreed level of participation to make the maximum shared use of the air navigation resources. |
| PREDICTABILITY | No increase in ANS delivery variability including asset availability. |
| SAFETY | Zero ANS-related accidents and a significant (50%) reduction of ANS-related serious incidents. |
| SECURITY | Zero significant disruptions due to cyber incidents |

3.3 Key performance indicator (KPI) and metrics

3.3.1 Current/past performance, expected future performance (estimated as part of forecasting and performance modelling), as well as actual progress in achieving performance objectives is quantitatively expressed by means of indicators, in this case called key performance indicators, or KPIs.

3.3.2 To be relevant, indicators need to correctly express the intention of the associated performance objective. Since indicators support objectives, they should be defined having a specific performance objective in mind.

Indicators are not often directly measured. They are calculated from supporting metrics according to clearly defined formulas, e.g. cost-per-flight indicator = sum (costs)/sum (flights).

Performance measurement is therefore done through the collection of data for the supporting metrics.

3.3.3 The tables and forms of the current regional air navigation implementation documents do not always reflect qualitatively the benefits of an ASBU module/element implementation in terms of performance, as metrics of a quantitative nature are applied.

3.3.4 Measuring implementation through the GANP KPIs will enable States to:

- a. organise the preparation of the ASBU modules/elements for their implementation; and
- b. measure and document the efficiency benefits of the modules/elements implemented.

3.4 ASBU Framework

The ASBU framework furthers the evolution of the global air navigation system towards the achievement of the identified performance ambitions by defining operational improvements and associated performance benefits derived from the specific operational concepts defined in the different evolutionary stages of the conceptual roadmap.

Once validated and available for introduction, these operational improvements will support the adoption of a holistic, performance-based approach to modernising the air navigation system in a cost-effective manner.

The adoption of a globally harmonised performance management process for upgrading the air navigation system is needed in order to achieve consistency of global, regional and national plans.

For the purpose of these instructions, the adoption of Block 0 (2013) and Block 1 (2019) modules/elements will be analysed first and foremost. However, if the necessary conditions and enablers are in place, planning for Block 2 (2025) could be undertaken, for example, for issues related to system-wide information management (SWIM).

See the list of GANP ASBU modules/elements in Appendix B.

4. PROCEDURES

4.1 Planning and implementation in progress

GANP and GASP Implementation

4.1.1 The development of Vol. III shall take into account that ICAO Assembly Resolution A40-1 stipulates that the GASP and GANP be implemented and maintained current in close cooperation and coordination with all stakeholders, and that these plans serve as a framework for the development and implementation of regional, sub-regional and national plans, thereby ensuring consistency, harmonisation and coordination of efforts to enhance the safety, capacity and efficiency of international civil aviation.

Technology and information threads

4.1.2 For the drafting of Vol. III, it must be noted that several ASBU modules/elements of the Technology (see note below) and Information thread are currently in the process of implementation through GREPECAS programmes. These modules/elements constitute the essential platform to ensure safety, efficiency and proper use of airspace capacity and services, in the context of the implementation of the operational thread.

Note. - The GANP contains technology roadmaps, which can be found at:

<https://www4.icao.int/ganportal/ASBU/Roadmap/Technology>

4.1.3 The GANP does not specifically define the linkage of technology and information modules/elements with specific KPIs. However, in some cases, the GANP recognises the KPA that may be associated to these modules/elements.

4.1.4 Therefore, in order to give continuity to the implementation of the technology and information threads, list 1 and list 2 below show the technology and information modules/elements associated to Block 0 and Block 1, which are to be considered in the planning scheme for Vol. III. As discussed in 4.1.9 below, these modules/elements must be analysed and included in [Table 11](#).

4.1.5 It must be recognised that the implementation of the technology and information threads meet certain performance objectives in various KPAs, *i.e.* interoperability, efficiency, capacity, safety, security, and cost-effectiveness. The ASUR and DAIM modules associated to GASP safety improvement initiatives are noteworthy.

4.1.6 The above would offer the possibility of measuring the implementation performance within a KPI; otherwise, a quantitative metric could be applied.

List 1.- Technology modules/elements essential for the CAR/SAM Regions

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|----------------------------------------------------------------------------------------------------|-------------------|
| ASUR | Alternative surveillance Initial ground surveillance capability | Technology |
| ASUR-B0/1 | Automatic dependent surveillance - broadcast (ADS-B) | |
| ASUR-B0/2 | Multilateration cooperative surveillance systems (MLAT) | |
| ASUR-B0/3 | Cooperative surveillance radar downlink of aircraft parameters (SSR-DAPS) | |
| ASUR-B1/1 | Reception of aircraft ADS-B signals from space (SB ADS-B) | |
| COMI | Communication infrastructure Improvement of AMS and AFS telecommunication infrastructure | Technology |
| COMI-B0/1 | Aircraft communication addressing and reporting system (ACARS) | |
| COMI-B0/2 | Aeronautical telecommunication network / Open systems interconnection (ATN/OSI) | |
| COMI-B0/3 | VHF data link (VDL) Mode 0/A | |
| COMI-B0/4 | VHF data link (VDL) Mode 2 Basic | |

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|--------------------------------------------------------------------------------------------------------|-------------------|
| COMI-B0/5 | Satellite communications (SATCOM) Class C data | |
| COMI-B0/6 | High frequency data link (HFDL) | |
| COMI-B0/7 | ATS message handling system (AMHS) | |
| COMI-B1/1 | Ground-ground aeronautical telecommunication network / Internet protocol suite (ATN/IPS) | |
| COMI-B1/2 | VHF data link (VDL) Mode 2 Multi-frequency | |
| COMI-B1/3 | SATCOM Class B Voice and data | |
| COMI-B1/4 | Aeronautical mobile airport communication system (AeroMACS) – ground-ground | |
| COMS | Communication services/systems Improvement of AMS and AFS communication services and systems | Technology |
| COMS-B0/1 | CPDLC (FANS 1/A & ATN B1) for domestic and procedural airspace | |
| COMS-B0/2 | ADS-C (FANS 1/A) for procedural airspace | |
| COMS-B1/1 | PBCS approved CPDLC (FANS 1/A+) for domestic and procedural airspace | |
| COMS-B1/2 | PBCS approved ADS-C (FANS 1/A+) for procedural airspace | |
| COMS-B1/3 | SATVOICE (incl. routine communications) for procedural airspace | |
| NAVS | Navigation systems Improvement of air navigation systems | Technology |
| NAVS-B0/1 | Ground-based augmentation system (GBAS) | |
| NAVS-B0/2 | Satellite-based augmentation system (SBAS) | |
| NAVS-B0/3 | Aircraft-based augmentation system (ABAS) | |
| NAVS-B0/4 | Navigation minimal operating networks (Nav MON) | |
| NAVS-B1/1 | Extended GBAS | |

List 2.- Information modules/elements essential for the CAR/SAM Regions

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|-----------------------------------------------------------------------------------------------------------|--------------------|
| AMET | Advanced meteorological information Meteorological information to improve efficiency and safety | Information |
| AMET-B0/1 | Meteorological observations products | |
| AMET-B0/2 | Meteorological forecast and warning products | |
| AMET-B0/3 | Climatological and historical meteorological products | |
| AMET-B0/4 | Dissemination of meteorological products | |
| AMET-B1/1 | Meteorological observations information | |
| AMET-B1/2 | Meteorological forecast and warning information | |

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------|
| AMET-B1/3 | Climatological and historical meteorological information | |
| AMET-B1/4 | Dissemination of meteorological information | |
| DAIM | Digital aeronautical information management | Information |
| | Optimise the provision of digital aeronautical information | |
| DAIM-B1/1 | Provision of quality-assured aeronautical data and information | |
| DAIM-B1/2 | Provision of digital Aeronautical Information Publication (AIP) data sets | |
| DAIM-B1/3 | Provision of digital terrain data sets | |
| DAIM-B1/4 | Provision of digital obstacle data sets | |
| DAIM-B1/5 | Provision of digital aerodrome mapping data sets | |
| DAIM-B1/6 | Provision of digital instrument flight procedure data sets | |
| DAIM-B1/7 | NOTAM improvements | |
| FICE | Flight and flow information for a collaborative environment | Information |
| | Increased interoperability, efficiency and capacity through ground-ground data integration | |
| FICE-B0/1 | Automated basic inter facility data exchange (AIDC) | |
| SWIM See Note* | System-wide information management | Information |
| | Improvement of information management performance through the application of SWIM | |
| SWIM-B2/1 | Information service provision | |
| SWIM-B2/2 | Information service consumption | |
| SWIM-B2/3 | SWIM registry | |
| SWIM-B2/4 | Air/ground SWIM for non-safety critical information | |
| SWIM-B2/5 | Global SWIM processes | |
| SWIM-B3/1 | Air/ground SWIM for safety-critical information | |
| *Note: The SWIM thread is planned for block 2 (year 2025) and block 3. However, procedure and infrastructure enablers for the exchange of information are currently being implemented. | | |

Operational threads

4.1.7 GREPECAS must maintain and enhance the results of its programmes and projects related to PBN implementation, based on the APTA module, which is associated to the mandate of ICAO Assembly Resolution A37-11, as well as the improvement of DCB, which involves the implementation of ATFM, FUA, FRTO and A-CDM (in airspace or airports that require it). Likewise, there are operational modules associated to GASP safety improvement initiatives, including APTA and SNET.

4.1.8 In this regard, list 3 below shows the modules/elements in the **Operational** category (Blocks 0 and 1) that are essential for planning in the CAR/SAM Regions, as reflected in Vol. III.

Note. - Planning for the GADS operational module, associated to SAR optimisation, is discussed further below.

4.1.9 The modules/elements analysed and selected from list 3 must be included in Table 11, indicating the appropriate KPI for measuring implementation performance. If this KPI is not contained in Table 8, it shall be included according to the references contained in Appendix D, and a baseline analysis will be conducted and annual improvement goals will be defined using Table 9 and Table 10 respectively.

List 3.- Essential modules/elements of the operational category

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| ACDM | Airport collaborative decision-making Improved airport operations through airport CDM | Operational |
| ACDM-0/1 | Aiport collaborative decision-making information sharing (ACIS) | |
| ACDM-0/2 | Integration with ATM network function | |
| ACDM-1/1 | Airport operations plan (AOP) | |
| ACDM-B1/2 | Airport operations centre (APOC) | |
| APTA | Airport accessibility Optimisation of PBN-based instrument approach procedures | Operational |
| APTA-B0/1 | PBN approaches (with basic capabilities) | |
| APTA-B0/2 | PBN SID and STAR procedures (with basic capabilities) | |
| APTA-B0/3 | SBAS/GBAS CAT I precision approach procedures | |
| APTA-B0/4 | CDO (Basic) | |
| APTA-B0/5 | CCO (Basic) | |
| APTA-B0/6 | PBN helicopter point-in-space (PinS) operations | |
| APTA-B0/7 | Performance-based aerodrome operating minima - Advanced aircraft | |
| APTA-B0/8 | Performance-based aerodrome operating minima - Basic aircraft | |
| APTA-B1/1 | PBN approaches (with advanced capabilities) | |
| APTA-B1/2 | PBN SID and STAR procedures (with advanced capabilities) | |
| APTA-B1/3 | Performance-based aerodrome operating minima - Advanced aircraft with SVGS | |
| APTA-B1/4 | CDO (Advanced) | |
| APTA-B1/5 | CCO (Advanced) | |
| FRTO | Improved operations through enhanced trajectories Capacity optimisation and flexible flights through enhanced en-route trajectories | Operational |

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|-------------------------------------------------------------------------------------------|--------------------|
| FRTO-B0/1 | Direct routing (DCT) | |
| FRTO-B0/2 | Airspace planning and flexible use of airspace (FUA) | |
| FRTO-B0/3 | Pre-validated and coordinated ATS routes to support flight and flow | |
| FRTO-B0/4 | Basic conflict detection and conformance monitoring | |
| FRTO-B1/1 | Free route airspace (FRA) | |
| FRTO-B1/2 | Required navigation performance (RNP) routes | |
| FRTO-B1/3 | Advanced flexible use of airspace (FUA) and management of real-time airspace data | |
| FRTO-B1/4 | Dynamic sectorisation | |
| FRTO-B1/5 | Enhanced conflict detection tools and conformance monitoring | |
| FRTO-B1/6 | Multi-sector planning | |
| FRTO-B1/7 | Trajectory options set (TOS) | |
| NOPS | Network operations Optimise air traffic flow management | Operational |
| NOPS-B0/1 | Initial integration of collaborative airspace management with air traffic flow management | |
| NOPS-B0/2 | Collaborative network flight updates | |
| NOPS-B0/3 | Network operation planning basic features | |
| NOPS-B0/4 | Initial airport/ATFM slots and A-ACDM network interface | |
| NOPS-B0/5 | Dynamic ATFM slot allocation | |
| NOPS-B1/1 | Short-term ATFM measures | |
| NOPS-B1/10 | Collaborative trajectory options program (CTOP) | |
| NOPS-B1/2 | Enhanced network operations planning | |
| NOPS-B1/3 | Enhanced integration of airport operations planning with network operations planning | |
| NOPS-B1/4 | Dynamic traffic complexity management | |
| NOPS-B1/5 | Full integration of airspace management with air traffic flow management | |
| NOPS-B1/6 | Initial dynamic airspace configurations | |
| NOPS-B1/7 | Enhanced ATFM slot swapping | |
| NOPS-B1/8 | Extended arrival management supported by the ATM network function | |
| NOPS-B1/9 | Target times for ATFM purposes | |
| NOPS-B2/1 | Optimised ATM network services in the initial TBO context | |
| NOPS-B2/2 | Enhanced dynamic airspace configuration | |
| NOPS-B2/3 | Collaborative network operation planning | |
| NOPS-B2/4 | Multi ATFM slot swapping and airspace user priorities | |
| NOPS-B2/5 | Further airport integration within network operation planning | |
| NOPS-B2/6 | ATFM adapted to cross-border free-route airspace (FRA) | |
| NOPS-B2/7 | UTM network operations | |
| NOPS-B2/8 | Upper airspace network operations | |
| NOPS-B3/1 | ATM network services in full TBO context | |
| NOPS-B3/2 | Cooperative network operations planning | |
| NOPS-B3/3 | Innovative airspace architecture | |

| <i>ASBU - Block/element</i> | <i>Description</i> | <i>Thread</i> |
|-----------------------------|--------------------------------------------------------------------------------------------|--------------------|
| SNET | Ground-based safety networks Improved efficiency of ground-based safety networks | Operational |
| SNET-B0/1 | Short-term conflict alert (STCA) | |
| SNET-B0/2 | Minimum safe altitude warning (MSAW) | |
| SNET-B0/3 | Area proximity warning (APW) | |
| SNET-B0/4 | Approach path monitoring (APM) | |
| SNET-B1/1 | Enhanced STCA with aircraft parameters | |
| SNET-B1/2 | Enhanced STCA in complex TMAs | |
| | | |

Search and rescue (SAR) service and GADSS

4.1.10 The implementation of the GANP GADSS (Global Aeronautical Distress and Safety System) module improves the performance of the SAR service, as its purpose is to optimise the warning service to ATS by improving aircraft management in abnormal or distress situations. See Appendix B.

4.1.11 Planning for the implementation of the GADS module shall take into account the planning and implementation of activities to improve and maintain SAR in CAR/SAM States, *inter alia*:

- a. Support States in establishing an entity to provide 24-hour SAR services within their territory and areas where the State has accepted responsibility for providing SAR to ensure that assistance is provided to persons in distress;
- b. Promote the harmonisation of aeronautical/maritime SAR policies, regulations, practices and procedures in accordance with ICAO and IMO provisions;
- c. Develop and update SAR agreements between rescue coordination centres (RCCs) of adjacent States and international SAR service agencies, as appropriate;
- d. Promote the establishment of joint aeronautical/maritime SAR committees, including voluntary SAR organisations, and the formulation of agreements among all national SAR service stakeholders; and
- e. Develop a human resource planning and training strategy in line with ICAO SAR provisions.

4.2 Formulation of the planning tables in Vol. III

The **AN-SPA (air navigation system performance assessment)** tool guides the user in the application of the six-step method described in Doc 9883, leading to an understanding and the identification of relevant improvements within the ASBU framework based on the description of problems, limitations or gaps affecting the operational scenario of a State or region, focusing on aerodromes, TMAs or en-route airspace.

It is highly recommended to carry out practices and exercises with this tool in multidisciplinary groups of the ANS community. To use it, you must register and login at:

<https://www4.icao.int/ganportal/Account/Login?ReturnUrl=%2Fganportal%2FANSPA%2FReports>

The planning procedure based on ICAO Doc 9883 and the six-step method are shown below.

STEP 1: DEFINE/REVIEW SCOPE, CONTEXT AND GENERAL AMBITIONS/EXPECTATIONS

Scope

- Time period: Immediate planning of achievements that can support aviation recovery in the CAR/SAM Regions in the short term (2021 - 2024) is foreseen, with a changing scenario expected in that period, depending on the evolution of the pandemic.
- Key performance areas: The **11 KPAs** of the GANP are analysed.
- Geographically: CAR/SAM airspace, within the scope of airports, terminal control areas (TMAs) and en-route segments.
- Operations under consideration: Air traffic operating under IFR.

Context

Ambitions and expectations

The general expectation of States, industry, ANSP providers, airports, and the ATM community at large is to improve the system, aiming to support the initiatives deployed for the reactivation and recovery of regional aviation in face of COVID 19.

The area navigation system must also be strengthened in order to show resilience to temporary disruptions or loss of capacity, and environmental protection aspects must be analysed.

Procedure: The following table allows for the identification of the scope of airspace: ALL FIRs and TMAs to be covered by State planning must be included:

Table 1

| State | FIR(s) | TMA(s) | | NOTES |
|-------|--------|----------------|------|-------|
| | | ICAO Indicator | Name | |
| | | | | |
| | | | | |

STEP 2: IDENTIFY OPPORTUNITIES, ISSUES AND SET (NEW) OBJECTIVES

2.1 Develop a list of present and future opportunities and issues that require performance management attention

Procedure: Based on the scope, context and general ambitions/expectations which were agreed upon during the previous step, the system should be analysed in order to develop an inventory of present and future opportunities and issues (weaknesses, threats) that may require performance management attention. See graph below:



This part of the process is generally known as strengths, weaknesses, opportunities and threats (SWOT) analysis:

- Strengths are (internal) attributes of a system or an organisation that help in the realisation of ambitions or in meeting expectations.

- Weaknesses are (internal) attributes of a system or an organisation that are a detriment to realising ambitions or meeting expectations.
- Opportunities are external conditions that help in the realisation of ambitions or in meeting expectations.
- Threats are external conditions that are a detriment or harmful to realising ambitions or meeting expectations.

Appendix C contains an example of a SWOT analysis.

CAR/SAM REGIONAL SWOT ANALYSIS

Table 2

| STRENGTHS | Notes |
|------------------|-------|
| | |
| | |
| | |
| | |

<<<<

Table 3

| WEAKNESSES | Notes |
|-------------------|-------|
| | |
| | |
| | |
| | |
| | |

<<<

Table 4

| OPPORTUNITIES | Notes |
|----------------------|-------|
| | |
| | |
| | |
| | |
| | |

<<<

Table 5

| THREATS | Notes |
|---------|-------|
| | |
| | |
| | |
| | |
| | |
| | |

Based on the above SWOT analysis, in the following Table it is recommended to identify the main key performance areas (KPAs) that can help moderate or reverse the weaknesses (internal front), as well as mitigate the threats (external front).

Table 6

| Related KPAs | Weaknesses | Threats |
|------------------------------------|------------|---------|
| Safety | | |
| Access and equity | | |
| Participation of the ATM community | | |
| Cost effectiveness | | |
| Capacity | | |
| Predictability | | |
| Interoperability | | |
| Security (cybersecurity) | | |
| Flexibility | | |
| Efficiency | | |
| Environmental impact | | |

2.2 Define performance objectives

IMPORTANT

For analysis and development of Tables 7 to 11, please refer to Appendix D, which contains the list "ASBU Elements - Expected Performance Impact on KPAs and specific KPIs", the purpose of which is to summarise the information presented in the GANP and provide a functional description of each operational ASBU element (Blocks 0 and 1). The cited Appendix has the following layout:

| ASBU Element | KPA | Focus Areas | Performance objective | KPI |
|--------------|-----|-------------|-----------------------|-----|
| | | | | |

List of performance objectives for KPAs and selected KPIs

Table 7

(Examples)

Note.- The performance objective is selected from Appendix D. Also, refer to the GANP Catalogue of performance objectives.

| KPA | Focus areas | Performance objective | Notes |
|------------|---------------------------------------|-------------------------------------------------|--------------|
| Capacity | Capacity, performance and utilisation | Reduce approach minima (ceiling and visibility) | |
| Capacity | Capacity, performance and utilisation | Increase arrival rate | |
| | | | |
| | | | |

STEP 3: QUANTIFY OBJECTIVES, SET GOALS AND CALCULATE REQUIREMENTS

3.1 Link key performance areas, performance objectives and indicators

List of KPIs and KPAs

Table 8
(Examples)

| KPA | Performance objective | KPI | Definition |
|------------|-------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Capacity | Reduce approach minima (ceiling and visibility) | KPI10 Airport peak throughput | The 95th percentile of the hourly number of operations recorded at an airport, in the “rolling” hours sorted from the least busy to the busiest hour. |

| KPA | Performance objective | KPI | Definition |
|----------|-----------------------|-------------------------------|------------------------------------------------------------------|
| | | | Can be computed for arrivals, departures or arrivals+departures. |
| Capacity | Increase arrival rate | KPI10 Airport peak throughput | |
| | | | |

3.2 Define the desired speed of progress in terms of baseline and target performance

Baseline performance for the selected KPIs

Table 9

(Examples)

| FIR /TMA/AIRPORT | BASELINE KPIs (2019) | | | | | | Operations measured [units] |
|------------------|----------------------|-------|--|--|--|--|-----------------------------|
| | KPI10 | KPIxx | | | | | |
| Airport XYZA | 12 ACFT/ h | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Annual performance targets and requirements

Table 10

(Examples)

| FIR /TMA/AIRPORT | TARGETS [KPIs] | | | | | Notes |
|------------------|-----------------|-------|-------|-------|-------|--------------------------------------------------------|
| | KPI10 | KPIxx | KPIxx | KPIxx | KPIxx | |
| Airport XYZA | 18 ACFT/ h | | | | | KPI10 increase “x” ACFT / hour or % annual improvement |
| | | | | | | |
| | | | | | | |
| | | | | | | |

STEP 4: SELECT SOLUTIONS TO EXPLOIT OPPORTUNITIES AND RESOLVE ISSUES

Solutions based on ASBU elements/modules or regional initiatives to exploit opportunities (associated to the KPI)

Note 1.- The ASBU elements are selected from Appendix D. Also refer to the GANP performance dashboard.

Note 2.- Other improvements outside the ASBU framework (non-ASBU), developed in the form of Regional Initiatives, may be included, which could address identified gaps or opportunities, thus contributing to the achievement of the expected level of performance.

**Table 11
(Examples)**

| FIR /TMA/AIRPORT | KPI or metric | ASBU elements / Regional initiatives | Start | End | Notes |
|-------------------------|----------------------------------------------------------|-----------------------------------------------------------------|--------------|------------|----------------------------------------------|
| TMA | Metric: ADS B system installed | ASUR-B0/1 Automatic dependent surveillance - broadcast (ADS-B) | 2021 | 2025 | Essential technology element |
| Airport | Metric: Digital terrain data set available and published | DAIM-B1/3 Provision of digital terrain data sets | 2021 | 2025 | Essential information element |
| Airport | KPI10 Airport peak throughput | APTA-B0/1 PBN approaches (with basic capabilities) | 2021 | 2023 | Essential operational element |
| Airport | KPI10 Airport peak throughput | APTA-B0/2 PBN SID and STAR procedures (with basic capabilities) | 2021 | 2023 | Essential operational element |
| Airport | KPI10 Airport peak throughput | RSEQ-B0/1 Arrival management | 2023 | 2025 | Performance objective, Increase arrival rate |
| | | | | | |

STEP 5: IMPLEMENT SOLUTIONS¹

Step 5 is the implementation phase of the performance management process. This is where the changes and improvements selected during the previous step are organised into detailed plans that are implemented and begin to produce benefits.

Status of implementation of selected ASBU improvements or Regional Initiatives

Table 12

(Examples)

| FIR/TMA /AIRPORT | ASBU elements / Regional Initiatives | Start | End | Status of implementation | Notes |
|-------------------------|--------------------------------------------------------------------|--------------|------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Airport XYZA | APTA-B0/1 PBN approaches (with basic capabilities) | 2021 | 2023 | <i>In progress</i> | . |
| Airport XYZA | APTA-B0/2 PBN SID and STAR procedures (with basic capabilities) | 2021 | 2023 | <i>In progress</i> | |
| | | | | <i>100% completed</i> <i>1% - 99% in progress</i> <i>0% planned</i> <i>Delayed*</i> | <i>*Delayed means that implementation is or will be delayed beyond end date</i> |

¹ For reference only, because Steps 5 and 6 will be deployed in the management phase

STEP 6: ASSESS ACHIEVEMENT OF OBJECTIVES

The purpose of Step 6 is to continuously keep track of performance and monitor whether performance gaps are being closed as planned and expected.

First of all, this implies data collection to populate the supporting metrics with the data needed to calculate the performance indicators. These indicators are then compared with the targets defined in Step 3 in order to draw conclusions on the speed of progress in achieving the objectives.

This step includes monitoring the progress of implementation projects, particularly in those cases where the implementation of solutions takes several years, as well as checking periodically whether all assumptions are still valid and the planned performance of the solutions is still meeting the requirements.

With regard to the review of actually achieved performance, the output of Step 6 is simply an updated list of performance gaps and their causes. In practice, the scope of the activity is often interpreted as being much wider and includes recommendations to mitigate the gaps. This is then called performance monitoring and review, which in addition to Step 6 includes Steps 1, 2 and 3 of the performance management process.

Performance benefits derived from the implementation of selected ASBU improvements or Regional Initiatives

Table 13

(Examples)

| FIR/TMA/AIRPORT | ASBU elements / Regional Initiatives | KPI | | | Notes |
|-----------------|--------------------------------------------------------------------------|------------|-------|-------|--------------------------------------------------------------|
| | | KPI10 | KPIxx | KPIxx | |
| Airport XYZA | APTA-B0/1 PBN approaches (with basic capabilities) | 15 ACFT/ h | | | 2022: half of the expected improvement was achieved |
| | APTA-B0/2 PBN SID and STAR procedures (with basic capabilities) | 15 ACFT/ h | | | 2022: half of the expected improvement was achieved |
| | | | | | |



KPI OVERVIEW

| KPI01 | Departure punctuality |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Percentage of flights departing from the gate on-time (compared to schedule). |
| Measurement Units | % of scheduled flights |
| Operations Measured | IFR departures of scheduled airlines |
| Variants | <p>Variant 1A – % of departures within ± 5 minutes of scheduled time of departure</p> <p>Variant 1B – % of departures delayed ≤ 5 minutes versus schedule</p> <p>Variant 2A – % of departures within ± 15 minutes of scheduled time of departure</p> <p>Variant 2B – % of departures delayed ≤ 15 minutes versus schedule</p> |
| Objects Characterized | The KPI is typically computed for traffic flows, individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This is an airspace user and passenger focused KPI: departure punctuality gives an overall indication of the service quality experienced by passengers, and the ability of the airlines to execute their schedule at a given departure location. |
| Parameters | <p>On-time threshold (maximum positive or negative deviation from scheduled departure time) which defines whether a flight is counted as on-time or not.</p> <p>Recommended values: 5 minutes and 15 minutes.</p> |
| Data Requirement | <p>For each departing scheduled flight:</p> <ul style="list-style-type: none"> • Scheduled time of departure (STD) or Scheduled off-block time (SOBT) • Actual off-block time (AOBT) |
| Data Feed Providers | Schedule database(s), airports, airlines and/or ANSPs |
| Formula / Algorithm | <p>At the level of individual flights:</p> <ol style="list-style-type: none"> 1. Exclude non-scheduled departures 2. Categorize each scheduled departure as on-time or not <p>At aggregated level:</p> <ol style="list-style-type: none"> 3. Compute the KPI: number of on-time departures divided by total number of scheduled departures |

- | | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • China / Europe benchmarking study (CAUC - EUROCONTROL, 2017) |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

| | |
|--------------|---------------------------------|
| KPI02 | Taxi-out additional time |
|--------------|---------------------------------|

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Actual taxi-out time compared to an unimpeded/reference taxi-out time. |
| Measurement Units | Minutes/flight |
| Operations Measured | The duration of the taxi-out phase of departing flights |
| Variants | <ul style="list-style-type: none"> Variant 1 – basic (computed without departure gate and runway data) Variant 2 – advanced (computed with departure gate and runway data) |
| Objects Characterized | The KPI is typically computed for individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This KPI is intended to give an indication of the efficiency of the departure phase operations on the surface of an aerodrome. This may include the average queuing that is taking place in front of the departure runways, non-optimal taxi routing and intermediate aircraft stops during taxi-out. The KPI is also typically used to estimate excess taxi-out fuel consumption and associated emissions (for the Environment KPA). The KPI is designed to filter out the effect of physical airport layout while focusing on the responsibility of ATM to optimize the outbound traffic flow from gate to take-off. |
| Parameters | <p>Unimpeded/reference taxi-out time:</p> <ul style="list-style-type: none"> • Recommended approach for the basic variant of the KPI: a single value at airport level, e.g. the 20th percentile of actual taxi times recorded at an airport, sorted from the shortest to the longest. • Recommended approach for the advanced variant of the KPI: a separate value for each gate/runway combination, e.g. the average actual taxi-out time recorded during periods of non-congestion (needs to be periodically reassessed). |
| Data Requirement | <p>For each departing flight:</p> <ul style="list-style-type: none"> • Actual off-block time (AOBT) • Actual take-off time (ATOT) <p>In addition, for the advanced KPI variant:</p> <ul style="list-style-type: none"> • Departure gate ID • Take-off runway ID |
| Data Feed Providers | Airports (airport operations, A-CDM), airlines (OOOI data), ADS-B data providers and/or ANSPs |

| | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Formula / Algorithm | At the level of individual flights: -F30- 1. Select departing flights, exclude helicopters 2. Compute actual taxi-out duration: ATOT minus AOBT 3. Compute additional taxi-out time: actual taxi-out duration minus unimpeded taxi-out time At aggregated level: 4. Compute the KPI: sum of additional taxi-out times divided by number of IFR departures |
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • Singapore / US / Europe benchmarking study (CAAS - FAA - EUROCONTROL, 2017) • China / Europe benchmarking study (CAUC - EUROCONTROL, 2017) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal • Single European Sky Performance Scheme • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| KPI03 | ATFM slot adherence |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Percentage of flights taking off within their assigned ATFM slot (Calculated Take-Off Time Compliance). |
| Measurement Units | % of flights subject to flow restrictions |
| Operations Measured | The take-off of IFR flights subject to flow restrictions. |
| Variants | Variants are possible depending on the size of the ATFM slot window. |
| Objects Characterized | The KPI is typically computed for individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This KPI gives an indication of the capability of an airport to contribute to ATFM effectiveness by delivering outbound traffic in a predictable manner to the departure runway, in compliance with assigned ATFM slots. |
| Parameters | Size of the ATFM slot window. Variant 1: the period between 5 minutes before and 10 minutes after the CTOT. Variant 2: the period between 5 minutes before and 5 minutes after the CTOT. |
| Data Requirement | For each departing IFR flight subject to an ATFM regulation: <ul style="list-style-type: none"> • Calculated Take-Off Time (CTOT) • Actual take-off time (ATOT) |
| Data Feed Providers | Airports, ATFM service |

Formula / Algorithm At the level of individual flights: -F31-

1. Exclude flights not subject to an ATFM regulation
2. Categorize each departing flight as compliant with its ATFM slot window or not

At aggregated level:

3. Compute the KPI: number of compliant departures divided by total number of departing flights subject to an ATFM regulation

- References & Examples of Use
- [PRC Performance Review Report \(EUROCONTROL 2017\)](#)
 - [European ANS Performance Data Portal](#)
 - Slot Tolerance Window (STW) compliance (Single European Sky Performance Scheme)
 - EDCT Window compliance (US)
 - [CANSO Recommended KPIs for Measuring ANSP Operational Performance \(2015\)](#)

KPI04 Filed flight plan en-route extension

Definition Flight planned en-route distance compared to a reference ideal trajectory distance.

Measurement Units % excess distance

Operations Measured The planned en-route distance, as selected during the preparation of flight plans.

Variants Variant 1, using a 40 NM cylinder around the departure and destination airport as the start/end of en-route airspace.

Variant 2, using a 40 NM cylinder around the departure airport and a 100 NM cylinder around the destination airport as the start/end of en-route airspace.

Objects Characterized The KPI can be computed for any volume of en-route airspace; this implies that it can be computed at State level (covering the FIRs of a State).

Utility of the KPI This KPI measures the en-route horizontal flight (in)efficiency contained in a set of filed flight plans crossing an airspace volume. Its value is influenced by route network design, route & airspace availability, airspace user choice (e.g. to ensure safety, to minimize cost and to take into account wind and weather) and airspace user constraints (e.g. overflight permits, aircraft limitations). A significant gap between this KPI and the Actual en-Route Extension KPI indicates that many flights are not flown along the planned route, which should trigger an analysis of why this is happening.


Parameters A '*Measured area*' is defined for which the KPI is computed. For example, a State.

A '*Reference area*' is defined as a (sub)regional boundary considered, containing all '*Measured areas*', for example States within the same ICAO Region.

Departure terminal area proxy: a cylinder with 40 NM radius around the departure airport.

Destination terminal area proxy: a cylinder with 40 NM radius around the destination airport (variant 1). For variant 2 the radius is 100 NM.

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Requirement | <p>For each flight plan:</p> <ul style="list-style-type: none"> • Departure airport (Point A) • Destination airport (Point B) • Entry point in the 'Reference area' (Point O) • Exit point from the 'Reference area' (Point D) • Entry points in the 'Measured areas' (Points N) • Exit points from the 'Measured areas' (Points X) • Planned distance for each NX portion of the flight |
| Data Feed Providers | ANSPs |
| Formula / Algorithm | <p>For the horizontal trajectory of each flight, different parts (trajectory portions) are considered (see Figure 1 for the example of a flight departing outside the 'Reference Area' and overflying a measured State; Figure 2 for the example of a domestic flight within a measured State):</p> <ol style="list-style-type: none"> 1. The part of the flight which is within the reference area (segment OD). If airports A and/or B are located within the reference area, the points O and/or D are placed on the airport reference point (ARP). 2. The part of the flight for which the State level indicator is computed (between points N and X). If points A and/or B (the airports) are located within the measured State, the points N and/or X are placed on the 40 NM circle (variant 1) around the airport reference point as shown in Figure 2, to exclude terminal route efficiency from the indicator. <p>Between points N and X, three quantities can be computed: the planned distance (length of flight plan trajectory), the local direct distance (great circle distance between N and X, not required for this indicator), and the contribution of the trajectory between N and X to the completion of the great circle distance between O and D. This contribution is called the "achieved distance". The formula for computing this is based on four great circle distances interconnecting the points O, N, X and D:</p> $\text{achieved distance} = [(OX-ON)+(DN-DX)]/2.$ <p>When a given flight traverses multiple States, the sum of the planned distance in each State equals the total planned distance from O to D. Likewise the sum of all achieved distances equals the direct distance from O to D.</p> <p>The extra distance for a portion NX of a given flight is the difference between the actual/flight planned distance and the achieved distance. The total extra distance observed within a measured area (e.g. a State) over a given time period is the sum of the planned distances across all traversing flights, minus the sum of the achieved distances across all traversing flights.</p> <p>The KPI is computed as the total extra distance divided by total achieved distance, expressed as a percentage.</p> |
| References & Examples of Use | <ul style="list-style-type: none"> • ICAO EUR Doc 030 EUR Region Performance Framework Document (July 2013) • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal • Single European Sky Performance Scheme • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

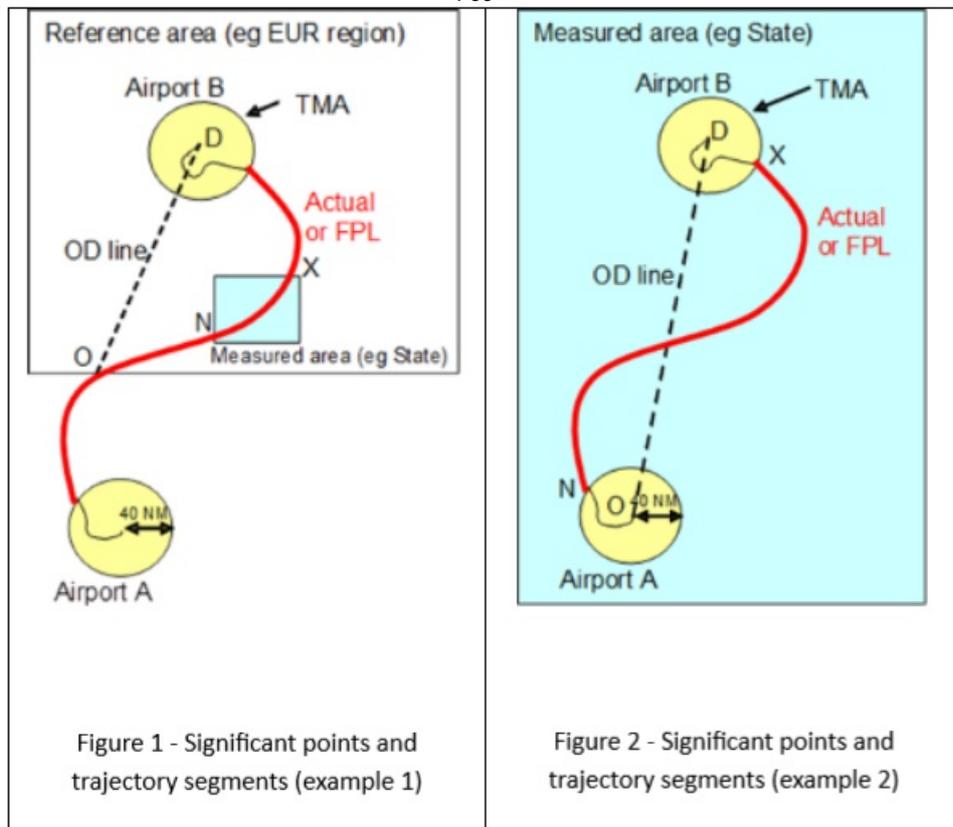

Significant points and trajectory segments (examples 1 and 2)

| KPI05 Actual en-route extension | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Actual en-route distance flown compared to a reference ideal distance. |
| Measurement Units | % excess distance |
| Operations Measured | The actual distance flown by flights in en-route airspace. |
| Variants | <p>Variant 1, using a 40 NM cylinder around the departure and destination airport as the start/end of en-route airspace.</p> <p>Variant 2, using a 40 NM cylinder around the departure airport and a 100 NM cylinder around the destination airport as the start/end of en-route airspace.</p> |
| Objects Characterized | The KPI can be computed for a traffic flow or a volume of en-route airspace; this implies that it can be computed at State level (covering the FIRs of a State). |
| Utility of the KPI | <p>This KPI measures the en-route horizontal flight (in)efficiency as actually flown, of a set of IFR flights crossing an airspace volume. Its value is influenced by route network design, route & airspace availability, airspace user choice (e.g. to ensure safety, to minimize cost and to take into account wind and weather) and airspace user constraints (e.g. overflight permits, aircraft limitations), and tactical ATC interventions modifying the trajectory (e.g. reroutings and 'direct to' clearances).</p> <p>The KPI is also typically used to estimate the excess fuel consumption and associated emissions (for the Environment KPA) attributed to horizontal flight inefficiency.</p> |

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | Identical to the parameters of the 'Filed Flight Plan en-Route Extension' KPI. |
| Data Requirement | <p>For each actual flight trajectory:</p> <ul style="list-style-type: none"> • Departure airport (Point A) • Destination airport (Point B) • Entry point in the 'Reference Area' (Point O) • Exit point from the 'Reference Area' (Point D) • Entry points in the 'Measured Areas' (Points N) • Exit points from the 'Measured Areas' (Point X) • Distance flown for each NX portion of the actual flight trajectory, derived from surveillance data (radar, ADS-B...). |
| Data Feed Providers | ANSPs, ADS-B data providers |
| Formula / Algorithm | Identical to the formula/algorithm of the 'Filed Flight Plan en-Route Extension' KPI. |
| References & Examples of Use | <ul style="list-style-type: none"> • ICAO EUR Doc 030 EUR Region Performance Framework Document (July 2013) • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal • Single European Sky Performance Scheme • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| | |
|--------------|-----------------------------------|
| KPI06 | En-route airspace capacity |
|--------------|-----------------------------------|

| | |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | The maximum volume of traffic an airspace volume will safely accept under normal conditions in a given time period. |
| Measurement Units | Variant 1: Movements/hr Variant 2: Number of aircraft (occupancy count) |
| Operations Measured | The nominal capability of an ANSP to deliver ATM services to IFR traffic in a given volume of en-route airspace, as seen at a given planning horizon. For each horizon a different type of capacity is to be considered: <ul style="list-style-type: none"> • Planned capacity: expected values one or more years ahead for planning and investment purposes • Declared capacity: values used during the strategic and pre-tactical ATFM processes • Expected capacity: values as finalised at the end of the pre-tactical process • Actual capacity: values as actually used on the day of operation during tactical ATFM and ATC. |
| Variants | <p>Variant 1: airspace throughput (entry flow rate)</p> <p>Variant 2: airspace occupancy count</p> |
| Objects Characterized | The KPI is typically used at the level of individual sectors (sector capacity) or en-route facilities (ACC capacity). |

| | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Utility of the KPI | <p>The KPI measures an upper bound on the allowable throughput or occupancy count of an en-route facility or sector.</p> <p>Planned capacities are primarily used for multi-year and investment planning. Declared, expected and actual capacities are used in traffic flow management as well as for measuring and monitoring service delivery and efficiency. Some ANSPs may prefer not to declare capacities, and only have these capacities established on a daily basis based on known/current operational factors. Establishing capacities at different planning horizons provides an important reference for understanding the total system performance under normal operating conditions and provides a basis to work from when determining the impact of operational factors limiting capacity. These factors include – but are not limited to – ATCO availability and workload.</p> |
| Parameters | <p>Variant 1: time interval at which the throughput declaration is made.</p> <p>Variant 2: time interval at which the average occupancy count declaration is made.</p> |
| Data Requirement | The various capacities are determined by the ANSP, and are dependent on traffic pattern, sector configuration, ATCO and system capability, etc. |
| Data Feed Providers | ANSPs |
| Formula / Algorithm | <p>At the level of an individual en-route facility:</p> <ol style="list-style-type: none"> 1. Select highest value from the set of established capacities (the maximum configuration capacity). 2. Compute the KPI: for variant 1, convert the value to an hourly movement rate, if the declaration is at smaller time intervals. |
| References & Examples of Use | <ul style="list-style-type: none"> • Brazil / Europe benchmarking study (DECEA - EUROCONTROL, 2017) • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| KPI07 | En-route ATFM delay |
|-------|---------------------|
|-------|---------------------|

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | ATFM delay attributed to flow restrictions in a given en-route airspace volume |
| Measurement Units | Minutes/flight |
| Operations Measured | The management of (temporary) capacity shortfalls in en-route airspace due to high demand and/or capacity reductions for a variety of reasons, resulting in the allocation of ATFM delay |
| Variants | None |
| Objects Characterized | The KPI can be computed for any volume of en-route airspace which participates in the ATFM process. |

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Utility of the KPI | This KPI is a time aggregation of the ATFM delay generated by flow restrictions which are established to protect a given volume of en-route airspace against demand/capacity imbalances. These flow restrictions (also called ATFM regulations) normally have a delay cause associated with them. This allows the KPI to be disaggregated by cause, which allows better diagnosis of the reasons for demand/capacity imbalances. Typically, the KPI is used to check whether ANSPs provide the capacity needed to cope with demand. |
| Parameters | None |
| Data Requirement | For each IFR flight: - Estimated Take-off Time (ETOT) computed from the last filed flight plan - Calculated Take-off Time (CTOT) - ID of the flow restriction generating the ATFM delay - Airspace volume associated with the flow restriction - Delay code associated with the flow restriction |
| Data Feed Providers | ATFM |
| Formula / Algorithm | At the level of individual flights: <ol style="list-style-type: none"> 1. Select the flights crossing the volume of en-route airspace 2. Select the subset of flights which are affected by the flow restrictions in this airspace 3. Compute ATFM delay: CTOT minus ETOT <p>At aggregated level:</p> <ol style="list-style-type: none"> 4. Compute the KPI: sum of ATFM delays divided by number of IFR flights crossing the airspace |
| References & Examples of Use | <ul style="list-style-type: none"> • ICAO EUR Doc 030 EUR Region Performance Framework Document (July 2013) • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal • Single European Sky Performance Scheme • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

KPI08 Additional time in terminal airspace

| | |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Actual terminal airspace transit time compared to an unimpeded time. Actual trajectories are generally longer in time and distance due to path stretching and/or holding patterns. In the example below the unimpeded trajectories are shown in red, and the actual trajectories in green and blue. See Figure 1: Terminal trajectories. |
| Measurement Units | Minutes/flight |
| Operations Measured | The terminal airspace transit time during the arrival flight phase. |

| | |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Variants | <p>Variants are possible depending on the chosen size of terminal airspace (40 NM or 100 NM cylinder) and the richness of the data feed: basic (without arrival runway ID) or advanced (with arrival runway ID)</p> <p>Variants with 100 NM cylinder are useful if airports have holding patterns outside the 40 NM cylinder.</p> <p>The use of generic cylinders abstracts local specifics in terms of approach airspace design (e.g. TMA) and ensures comparability across different airports.</p> <p>See table 1: Cylinder variants</p> |
| Objects Characterized | <p>The KPI is typically computed for individual airports, or clusters of airports (selection/grouping based on size and/or geography).</p> |
| Utility of the KPI | <p>This KPI is intended to give an indication of the average queuing that is taking place in terminal airspace. This queuing is the result of sequencing and metering. The KPI captures the extent to which arriving flights are subjected to speed reductions, path extensions and holding patterns to absorb the queuing time. The KPI is also typically used to estimate excess fuel consumption and associated emissions (for the Environment KPA) attributable to horizontal flight inefficiency in terminal airspace. The KPI is designed to filter out the operational variability of terminal airspace transit time (e.g. due to wind, aircraft speed and length of the approach procedure, such as the difference between a straight-in approach and a downwind arrival) while focusing on the responsibility of ATM to optimize the inbound traffic flow from terminal airspace entry to landing.</p> |
| Parameters | <p>Destination terminal area proxy (also called Arrival Sequencing and Metering Area – ASMA): a cylinder with 40 NM radius around the destination airport. For variants A100 and B100 the radius is 100 NM.</p> <p>For the advanced variants only: list of terminal airspace entry segments (used to group flights entering the cylinder from \pm the same direction).</p> <p>Unimpeded terminal airspace transit time:</p> <ul style="list-style-type: none"> • Recommended approach for the basic variants of the KPI: a single value at airport level = the 20th percentile of actual terminal airspace transit times recorded at an airport, sorted from the shortest to the longest. • Recommended approach for the advanced variants of the KPI: a separate value for each entry segment/landing runway combination = the average terminal airspace transit time recorded during periods of non-congestion (needs to be periodically reassessed). |
| Data Requirement | <p>For each arriving flight:</p> <ul style="list-style-type: none"> • Terminal airspace entry time, computed from surveillance data (radar, ADS-B...) • Actual landing time (ALDT) <p>In addition, for the advanced KPI variants:</p> <ul style="list-style-type: none"> • Terminal airspace entry segment, computed from surveillance data (radar, ADS-B...) • Landing runway ID |
| Data Feed Providers | <p>Airlines (OOOI data), airports, ADS-B data providers and/or ANSPs</p> |

Formula / Algorithm At the level of individual flights: -F38-

1. Select arrivals, exclude helicopters
2. Compute actual terminal airspace transit time: ALDT minus terminal airspace entry time
3. Compute additional terminal airspace transit time: actual terminal airspace transit time minus unimpeded terminal airspace transit time

At aggregated level:

4. Compute the KPI: sum of additional terminal airspace transit times divided by number of IFR arrivals

References &
Examples of Use

- [Comparison of ATM-Related Operational Performance: U.S./Europe \(September 2016\)](#)
- [Singapore / US / Europe benchmarking study \(CAAS - FAA - EUROCONTROL, 2017\)](#)
- [PRC Performance Review Report \(EUROCONTROL 2017\)](#)
- [European ANS Performance Data Portal](#)
- [Single European Sky Performance Scheme](#)
- [CANSO Recommended KPIs for Measuring ANSP Operational Performance \(2015\)](#)

| | 40 NM cylinder | 100 NM cylinder |
|--------------------|----------------|-----------------|
| Advanced data feed | Variant A40 | Variant A100 |
| Basic data feed | Variant B40 | Variant B100 |

Table 1: Cylinder variants

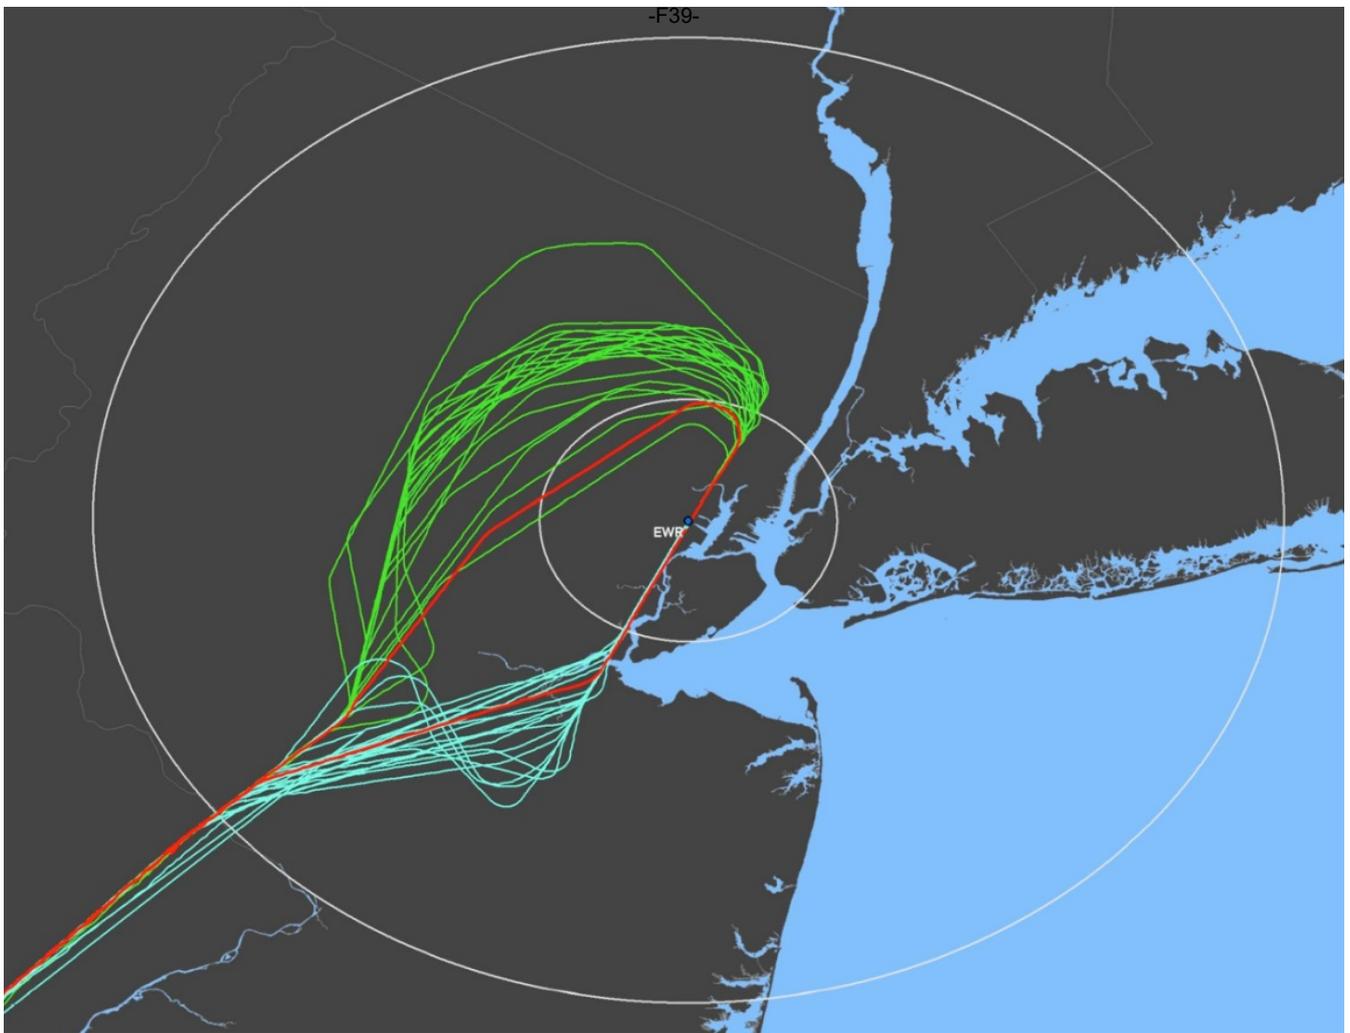


Figure 1: Terminal trajectories

KPI09

Airport peak capacity

Definition The highest number of operations an airport can accept in a one-hour time frame (also called declared capacity). Can be computed for arrivals, departures or arrivals+departures.

Measurement Units Number of departures / hour, Number of landings / hour, Number of (departures+landings) / hour

Operations Measured The capacity declaration of an airport.

Variants Variant A: Airport peak arrival capacity

Variant D: Airport peak departure capacity

Variant AD: Airport peak movement capacity (departures + arrivals)

Objects Characterized The KPI is computed for individual airports.

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Utility of the KPI | This KPI indicates the highest number of operations that an airport will accept, using the most favorable runway configuration under optimum operational conditions. The runways may or may not be the most constraining factor for airport capacity: at some airports the most constraining factor may be the terminal airspace, the taxiways, the number of gates, passenger handling capacity etc. The KPI is typically used for scheduling and ATFM purposes, and to develop capacity investment plans. |
| Parameters | None |
| Data Requirement | Scheduling parameters for slot controlled airports Airport Acceptance Rates (AAR), Airport Departure Rates (ADR) |
| Data Feed Providers | Airports |
| Formula / Algorithm | At the level of an individual airport: 1. Select highest value from the set of declared capacities. 2. Compute the KPI: convert the value to an hourly rate, if the declaration is at smaller time intervals. |
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • Brazil / Europe benchmarking study (DECEA - EUROCONTROL, 2017) • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| KPI10 Airport peak throughput | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | The 95th percentile of the hourly number of operations recorded at an airport, in the “rolling” hours sorted from the least busy to the busiest hour. Can be computed for arrivals, departures or arrivals+departures. |
| Mesurement Units | Number of departures / hour, Number of landings / hour, Number of (departures+landings) / hour |
| Operations Measured | The actual number of operations at an airport. |
| Variants | Variant 1: IFR operations only Variant 2: IFR + VFR operations (relevant for airports with a high percentage of VFR traffic) To be combined with: Variant A: Airport peak arrival throughput Variant D: Airport peak departure throughput Variant AD: Airport peak movement throughput (departures + arrivals) |
| Objects Characterized | The KPI is computed for individual airports. |
| Utility of the KPI | This KPI gives an indication of “busy-hour” actual movement rates at an airport, as recorded during a given time period. For congested airports, this throughput is an indication of the effectively realized capacity; for uncongested airports it is a measure of demand. |

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | Time interval for “rolling” hours. Recommended value: 15 minutes. The percentile chosen to exclude outliers. Recommended value: 95th percentile. |
| Data Requirement | For each flight: <ul style="list-style-type: none"> • Actual landing time (ALDT) • Actual take-off time (ATOT). |
| Data Feed Providers | Airports |
| Formula / Algorithm | At the level of individual flights: <ol style="list-style-type: none"> 1. Select flights, exclude helicopters At the level of individual “rolling” hours: <ol style="list-style-type: none"> 2. Convert the set of flights to hourly landing rates and departure rates by “rolling” hour 3. Sort the “rolling” hours from the least busy to the busiest hour 4. Compute the KPI: it equals the rate value of the 95th percentile of the “rolling” hours |
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • Singapore / US / Europe benchmarking study (CAAS - FAA - EUROCONTROL, 2017) • China / Europe benchmarking study (CAUC - EUROCONTROL, 2017) • Brazil / Europe benchmarking study (DECEA - EUROCONTROL, 2017) |

KPI11 Airport throughput efficiency

| | |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Airport throughput (accommodated demand) compared to capacity or demand, whichever is lower. Can be computed for arrivals, departures or arrivals+departures. |
| Measurement Units | Average Over/Under Delivery or % of accommodated operations. |
| Operations Measured | The number of unaccommodated operations at an airport. |
| Variants | Variant A: IFR arrivals Variant D: IFR departures Variant AD: IFR Operations (arrivals + departures) |
| Objects Characterized | The KPI is computed for individual airports. |
| Utility of the KPI | This KPI assesses how effectively capacity is managed by the ANSP. It is a measure of accommodated demand, compared to the available capacity of the airport, irrespective of the delay incurred by arriving traffic. Seen in another way, it captures the “missed” slots. At congested airports, the KPI relates the throughput to the declared capacity. At uncongested airports (or airports without declared capacity) the KPI relates the throughput to the unconstrained demand based on flight plans. |
| Parameters | Time interval at which to perform the most granular calculations. Recommended value: 15 minutes. |

| | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Requirement | <p style="text-align: right;">F42-</p> <p>For each arriving and/or departing flight:</p> <ul style="list-style-type: none"> • Actual landing time (ALDT) and take-off time (ATOT) • Estimated landing time (ELDT) and take-off time (ETOT) (from flight plan) <p>For each time interval:</p> <ul style="list-style-type: none"> • Declared landing capacity of the airport • Declared departure capacity of the airport • Declared total capacity of the airport |
| Data Feed Providers | Airports |
| Formula / Algorithm | <p>Example for arrivals:</p> <p>For each time interval:</p> <ol style="list-style-type: none"> 1. Compute the throughput: count the number of actual landings based on ALDT 2. Compute the demand: count the number of estimated landings based on ELDT 3a. if demand \geq capacity: efficiency = throughput / capacity 3b. if demand < capacity: efficiency = throughput / demand <p>At aggregated level (longer time periods):</p> <ol style="list-style-type: none"> 4. Compute the KPI: $\text{sum}(\text{efficiency} \times \text{demand}) / \text{sum}(\text{demand})$ <p><i>Note: See Table 1: Example for arrivals. The average percentage weighted by actual arrivals is 96.1%. The average under-delivery of arrivals is -1.8. The same process can be used for departures or combined operations.</i></p> |
| References & Examples of Use | <ul style="list-style-type: none"> • Singapore / US / Europe benchmarking study (CAAS - FAA - EUROCONTROL, 2017) • Brazil / Europe benchmarking study (DECEA - EUROCONTROL, 2017) • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| Hour | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 |
|-----------------------------------------|-------|------|------|------|------|-------|-------|-------|-------|
| Data | | | | | | | | | |
| Demand | 41 | 58 | 59 | 70 | 67 | 59 | 63 | 72 | 66 |
| Capacity | 35 | 35 | 35 | 35 | 35 | 35 | 40 | 45 | 45 |
| Throughput | 30 | 38 | 36 | 36 | 36 | 32 | 35 | 37 | 44 |
| Performance Score | | | | | | | | | |
| Throughput / Min (Demand, Capacity) | 85.7% | 108% | 103% | 103% | 103% | 91.4% | 87.5% | 82.2% | 97.8% |
| Throughput minus Min (Demand, Capacity) | -5 | 3 | 1 | 1 | 1 | -3 | -5 | -8 | -1 |

Table 1: Example for arrivals

KPI12 Airport/Terminal ATFM delay

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | ATFM delay attributed to arrival flow restrictions at a given airport and/or associated terminal airspace volume. |
| Measurement Units | Minutes/flight |
| Operations Measured | The management of (temporary) capacity shortfalls at and around destination airports due to high demand and/or capacity reductions for a variety of reasons, resulting in the allocation of ATFM delay. |
| Variants | None |
| Objects Characterized | The KPI is typically computed for individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This KPI is a time aggregation of the ATFM delay generated by flow restrictions which are established to protect a destination airport or its terminal area against demand/capacity imbalances. If a terminal area covers multiple airports, each individual flight delay is attributed to the corresponding destination airport. These flow restrictions (also called ATFM regulations) normally have a delay cause associated with them. This allows the KPI to be disaggregated by cause, which allows better diagnosis of the reasons for demand/capacity imbalances. Typically, the KPI is used as a proxy to check whether airports and ANSPs provide the capacity needed to cope with demand. |
| Parameters | None |

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Requirement | <p>For each IFR flight:</p> <ul style="list-style-type: none"> • Estimated Take-off Time (ETOT) computed from the last filed flight plan • Calculated Take-off Time (CTOT) • ID of the flow restriction generating the ATFM delay • Airport or terminal airspace volume associated with the flow restriction • Delay code associated with the flow restriction |
| Data Feed Providers | ATFM |
| Formula / Algorithm | <p>At the level of individual flights:</p> <ol style="list-style-type: none"> 1. Select the flights arriving at this airport 2. Select the subset of flights which are affected by the flow restrictions at this airport or its terminal airspace 3. Compute ATFM delay: CTOT minus ETOT <p>At aggregated level:</p> <ol style="list-style-type: none"> 4. Compute the KPI: sum of ATFM delays divided by number of arrivals at the airport |
| References & Examples of Use | <ul style="list-style-type: none"> • ICAO EUR Doc 030 EUR Region Performance Framework Document (July 2013) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal • Single European Sky Performance Scheme • CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

| KPI13 Taxi-in additional time | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Actual taxi-in time compared to an unimpeded/reference taxi-in time |
| Measurement Units | Minutes/flight |
| Operations Measured | The duration of the taxi-in phase of arriving flights |
| Variants | <p>Variant 1 – basic (computed without landing runway and arrival gate data)</p> <p>Variant 2 – advanced (computed with landing runway and arrival gate data)</p> |
| Objects Characterized | The KPI is typically computed for individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This KPI is intended to give an indication of the various taxi-in inefficiencies that occur after landing. Its value may be influenced by unavailability of the arrival gate and effects such as non-optimal taxi routing and intermediate aircraft stops during taxi-in. The KPI is also typically used to estimate excess taxi-in fuel consumption and associated emissions (for the Environment KPA). The KPI is designed to filter out the effect of physical airport layout while focusing on the responsibility of the airport to provide parking space and ATM to optimize the inbound traffic flow from landing to in-blocks. |

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | Unimpeded/reference taxi-in time: -F45- <ul style="list-style-type: none"> Recommended approach for the basic variant of the KPI: a single value at airport level, e.g. the 20th percentile of actual taxi times recorded at an airport, sorted from the shortest to the longest Recommended approach for the advanced variant of the KPI: a separate value for each runway/gate combination, e.g. the average actual taxi-in time recorded during periods of non-congestion (needs to be periodically reassessed) |
| Data Requirement | For each arriving flight: <ul style="list-style-type: none"> Actual landing time (ALDT) Actual in-block time (AIBT) <p>In addition, for the advanced KPI variant:</p> <ul style="list-style-type: none"> Landing runway ID Arrival gate ID |
| Data Feed Providers | Airports (airport operations), airlines (OOOI data), ADS-B data providers and/or ANSPs |
| Formula / Algorithm | At the level of individual flights: <ol style="list-style-type: none"> Select arriving flights, exclude helicopters Compute actual taxi-in duration: AIBT minus ALDT Compute additional taxi-in time: actual taxi-in duration minus unimpeded taxi-in time <p>At aggregated level:</p> <ol style="list-style-type: none"> Compute the KPI: sum of additional taxi-in times divided by number of IFR arrivals |
| References & Examples of Use | <ul style="list-style-type: none"> Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) China / Europe benchmarking study (CAUC - EUROCONTROL, 2017) PRC Performance Review Report (EUROCONTROL 2017) CANSO Recommended KPIs for Measuring ANSP Operational Performance (2015) |

KPI14

Arrival punctuality

| | |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Percentage of flights arriving at the gate on-time (compared to schedule) |
| Measurement Units | % of scheduled flights |
| Operations Measured | IFR arrivals of scheduled airlines |
| Variants | <p>Variant 1A – % of arrivals within ± 5 minutes of scheduled time of arrival</p> <p>Variant 1B – % of arrivals delayed ≤ 5 minutes versus schedule</p> <p>Variant 2A – % of arrivals within ± 15 minutes of scheduled time of arrival</p> <p>Variant 2B – % of arrivals delayed ≤ 15 minutes versus schedule</p> |

| | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Objects Characterized | The KPI is typically computed for traffic flows, individual airports, or clusters of airports (selection/grouping based on size and/or geography). |
| Utility of the KPI | This is an airspace user and passenger focused KPI: arrival punctuality gives an overall indication of the service quality experienced by passengers, and the ability of the airlines to execute their schedule at a given destination. |
| Parameters | On-time threshold (maximum positive or negative deviation from scheduled arrival time) which defines whether a flight is counted as on-time or not. Recommended values: 5 minutes and 15 minutes. |
| Data Requirement | For each arriving scheduled flight: <ul style="list-style-type: none"> • Scheduled time of arrival (STA) or Scheduled in-block time (SIBT) • Actual in-block time (AIBT) |
| Data Feed Providers | Schedule database(s), airports, airlines and/or ANSPs |
| Formula / Algorithm | At the level of individual flights: <ol style="list-style-type: none"> 1. Exclude non-scheduled arrivals 2. Categorize each scheduled arrival as on-time or not At aggregated level: <ol style="list-style-type: none"> 3. Compute the KPI: number of on-time arrivals divided by total number of scheduled arrivals |
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • China / Europe benchmarking study (CAUC - EUROCONTROL, 2017) • PRC Performance Review Report (EUROCONTROL 2017) |

KPI15 Flight time variability

| | |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Distribution of the flight (phase) duration around the average value. |
| Mesurement Units | Minutes/flight |
| Operations Measured | Scheduled flights with the same flight ID on a given airport-pair (flight XYZ123 from A to B): the gate-to-gate duration, and at more detailed level the duration of the individual flight phases (taxi-out, airborne, taxi-in) |
| Variants | Different parameter values possible (see 'Parameters'). |
| Objects Characterized | The KPI is typically computed for the scheduled traffic flows interconnecting a given cluster of airports (two or more; selection/grouping based on size and/or geography). |

Utility of the KPI The “variability” of operations determines the level of predictability for airspace users and hence has an impact on airline scheduling. It focuses on the variance (distribution widths) associated with the individual phases of flight as experienced by airspace users.

The higher the variability, the wider the distribution of actual travel times and the more costly time buffer is required in airline schedules to maintain a satisfactory level of punctuality. In addition, reducing the variability of actual block times can potentially reduce the amount of excess fuel that needs to be carried for each flight in order to allow for uncertainties.

Parameters Minimum monthly flight frequency filter: flights with a frequency less than 20 times per month are not included in the indicator.

Outlier filter:

Variant 1: Only 70% of the (remaining) flights are considered in the indicator, i.e. the 15th percentile (percentile 1) is used to determine the shortest duration, the 85th percentile (percentile 2) is used to determine the longest duration

Variant 2: Only 60% of the (remaining) flights are considered in the indicator, i.e. the 20th percentile (percentile 1) is used to determine the shortest duration, the 80th percentile (percentile 2) is used to determine the longest duration

Data Requirement For each flight:

OOOI data: gate “out” (AOBT), wheels “off,” wheels “on,” and gate “in” (AIBT) actual times.

Data Feed Providers Airlines

Formula / Algorithm At the level of flights with the same flight ID , at monthly or longer (e.g. annual) time aggregation level:

1. Exclude flight IDs not meeting the minimum monthly frequency requirement
2. Sort flights in ascending order of flight (phase) duration
3. Identify shortest (percentile 1) and longest (percentile 2) duration
4. Compute variability: (longest – shortest) / 2

At the more aggregated level:

5. Compute the KPI: weighted average of the individual flight ID variabilities

- References & Examples of Use**
- [Comparison of ATM-Related Operational Performance: U.S./Europe \(September 2016\)](#)
 - [PRC Performance Review Report \(EUROCONTROL 2017\)](#)
 - [CANSO Recommended KPIs for Measuring ANSP Operational Performance \(2015\)](#)

KPI16 Additional fuel burn

Definition Additional flight time/distance and vertical flight inefficiency converted to estimated additional fuel burn attributable to ATM

Mesurement Units kg fuel/flight

| | |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Variants | <p>Variant 1 – simple approach: calculation based on the average value other KPIs for groups of flights and corresponding average fuel burn values</p> <p>Variant 2 – advanced approach: calculation based on values computed for individual flights</p> |
| Objects Characterized | <p>This KPI is a conversion of the additional flight time/distance and vertical flight inefficiency KPIs to a corresponding (estimated) additional fuel consumption; hence it describes a performance characteristic of the same objects as the additional flight time/distance and vertical flight inefficiency KPIs: en-route airspace, terminal airspace and airports. Typically the KPI is published at the level of a State or (sub)region.</p> |
| Utility of the KPI | <p>This KPI is designed to provide a simple method for estimating ATM-related fuel efficiency at aggregated level, without the need to model fuel burn at the level of individual flights. By adding the average additional fuel burn value of the individual flight phases, a gate-to-gate value is produced which is representative for an “average flight”.</p> <p>The KPI is often further converted into additional CO₂ emission (for the environment KPA) and/or the monetary value of fuel savings (for the cost effectiveness KPA).</p> <p>The KPI is sometimes called the “benefit pool”: it gives an indication of the ATM-induced flight inefficiency that is theoretically actionable by ATM.</p> <p>In practice the actionable “benefit pool” is smaller: real optimum performance is achieved at a residual non-zero value of the KPI.</p> |
| Parameters | <p>Average fuel flow (kg/min) during taxi</p> <p>Average fuel flow (kg/min) during arrival in terminal airspace</p> <p>Average fuel flow (kg/km) in en-route airspace</p> <p>Average additional fuel flow (kg/FL/km) during cruise due to flying lower</p> |
| Data Requirement | <p>Indicator values to be converted to estimated additional fuel burn:</p> <p>KPI02 Taxi-Out Additional Time (min/flight)</p> <p>KPI13 Taxi-In Additional Time (min/flight)</p> <p>KPI05 Actual en-Route Extension (%) & average en-route distance flown (km/flight)</p> <p>KPI08 Additional time in terminal airspace (min/flight)</p> <p>KPI17 Level-off during climb</p> <p>KPI18 Level capping during cruise & average cruise (ToC-ToD) distance flown (km/flight)</p> <p>KPI19 Level-off during descent</p> |
| Data Feed Providers | Performance analysts |

Compute the KPI: (KPI02 Taxi-Out Additional Time x Average fuel flow during taxi) + (KPI13 Taxi-In Additional Time x Average fuel flow during taxi) + (KPI05 Actual en-Route Extension (%) x Average en-route distance flown x Average fuel flow in en-route airspace) + (KPI08 Additional time in terminal airspace x Average fuel flow during arrival in terminal airspace) + (KPI17 Level-off distance during climb x Average additional fuel flow during climb) + (KPI18 Average number of FL too low x Average distance during cruise x Average additional fuel flow per FL too low during cruise) + (KPI19 Level-off distance during descent x Average additional fuel flow during descent).

References &
Examples of Use

- [Comparison of ATM-Related Operational Performance: U.S./Europe \(September 2016\)](#)

KPI17

Level-off during climb

Definition Distance and time flown in level flight before Top of Climb.

Measurement Units NM/flight and minutes/flight

Operations Measured Actual IFR flights

Variants

- Variant 1: Average distance flown in level flight before Top of Climb
- Variant 2: Average time flown in level flight before Top of Climb

Objects Characterized The KPI is typically computed for traffic flows, individual airports, or clusters of airports (selection/grouping based on size and/or geography).

Utility of the KPI This KPI is intended to give an indication of the amount of level flight during the climb phase. Ideally, there should be no level flight during climbs because level flight results in a higher fuel burn and possibly more noise. Aircraft should reach their cruising altitudes as soon as possible since the fuel consumption is lower at higher altitudes.

Parameters

- Analysis radius: the radius around the analysed airport within which the climb trajectory is analysed (e.g. 200NM).
- Vertical speed limit: maximum vertical speed used to detect the start and end of a level segment (e.g. 300 feet/minute).
- Level band limit: altitude band within which data points have to stay to be included in a level segment (e.g. 200 feet).
- Minimum level time: minimum time duration for a level segment to be considered in the results (e.g. 20 seconds).
- Exclusion box percentage: percentage of the Top of Climb altitude which is used to define the lower altitude of the exclusion box (e.g. 90%). E.g. level segments occurring above the lower altitude limit of the exclusion box and longer than the exclusion box time are excluded from the results.
- Exclusion box time: a level segment in the exclusion box and longer than the exclusion box time is excluded (e.g. 5 minutes).
- Minimum altitude: the altitude where the level segment detection during the climb starts. The trajectory below this altitude is not analysed (e.g. 3000 feet).

| | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Data Requirement | For each flight trajectory: <ul style="list-style-type: none"> • 4D data points (latitude, longitude, altitude and time) • Departure airport ARP coordinates |
| Data Feed Providers | Trajectory data providers (reporting archived actual trajectories based on ADS-B and/or other surveillance data sources) and/or ANSPs. |
| Formula / Algorithm | <p>Level segments in the climb trajectory within the analysis radius are detected using the vertical speed limit and level band limit. The methodology considers a data point as the start of a level segment when the following conditions are met:</p> <ul style="list-style-type: none"> • the altitude difference with the next data point is less than or equal to the level band limit; and • the vertical speed towards the next data point is less than or equal to the vertical speed limit. <p>The level segment ends when the altitude difference between the altitude of the beginning of the level segment and the altitude of a data point is more than the level band limit or when the vertical speed between two consecutive data points is more than the vertical speed limit.</p> |
| References & Examples of Use | <ul style="list-style-type: none"> • Comparison of ATM-Related Operational Performance: U.S./Europe (September 2016) • PRC Performance Review Report (EUROCONTROL 2017) • European ANS Performance Data Portal |

KPI18 Level capping during cruise

| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Definition | Flight Level difference between maximum Flight Levels on a measured airport pair and maximum Flight Levels on similar unconstrained airport pairs. |
| Mesurement Units | Flight Levels/flight |
| Operations Measured | The cruise phase of IFR flights. |
| Variants | <p>Variant 1: based on the maximum cruise Flight Level in the last filed flight plans</p> <p>Variant 2: based on the maximum cruise Flight Level of actual trajectories (surveillance data)</p> |
| Objects Characterized | The KPI is typically computed for traffic flows on individual airport pairs or groups of airport pairs (weighted average). |
| Utility of the KPI | <p>This KPI is intended to give an indication of the amount of vertical flight inefficiency related to maximum Flight Levels during the cruise phase (level capping). It measures the average Flight Level difference between the maximum Flight Levels of respectively flights on the analysed airport pair and flights on similar unconstrained airport pairs.</p> <p>The KPI is purely based on statistical processing of vertical flight profiles; it does not require any data on operational level capping constraints.</p> |

- Parameters
- Great Circle Distance (GCD) interval: the width of the ranges of great circle distances (e.g. 10NM). If 10 NM is used, reference distributions are built for airport pairs with a great circle distance in the following ranges: [0NM, 10NM), [10NM, 20NM), [20NM, 30NM)...
 - Number of reference flights: minimum number of flights in every GCD interval (e.g. 1000 flights).
 - Percentile interval: the interval between the calculated percentiles of the distributions (e.g. 1 percent).
 - Excluded flights percentage: percentage of flights excluded from the higher and lower end of the distributions to account for outliers (e.g. 10%).

- Data Requirement
- For each flight trajectory:
- Maximum cruise Flight Level
 - Departure airport
 - Arrival airport

Data Feed Providers

For variant 1: ANSPs; For variant 2: Trajectory data providers (reporting archived actual trajectories based on ADS-B and/or other surveillance data sources) and/or ANSPs

Formula / Algorithm

Reference distributions of the maximum Flight Levels of reference flights are built for every GCD interval. Reference flights are flights on airport pairs which have a great circle distance similar to the great circle distance of the analysed airport pair and which have no flight level capping constraints. The reference distributions are then converted into percentiles for every percentile interval.

Distributions and percentiles for the analysed airport pair are calculated in the same way.

For each percentile interval, the Flight Level value of the airport pair is subtracted from the Flight Level value of the reference. When the airport pair value is higher than the reference value, the result of the subtraction is negative. This might appear as if the flights are more efficient than the reference flights. Nevertheless, the focus is put on finding the inefficiencies, so negative values are set to 0.

The result of the percentile interval is then multiplied by the number of flights corresponding to the percentile interval (e.g. if the width of the percentile interval is 1%, the number of flights corresponding to the percentile interval is 1% of the total number of flights on the airport pair).

Summing up over all percentile intervals gives the total vertical flight inefficiency (number of Flight Levels summed over all flights). The vertical flight inefficiency per flight value is then calculated by dividing the total vertical flight inefficiency by the number of flights on the considered airport pair. The number of flights for this calculation step is 80% of the total number of flights on the airport pair if the excluded flights percentage is 10% (lowest 10% and highest 10% of the flights are not used).

This methodology is done for groups of aircraft types having similar performance to avoid comparing e.g. jet aircraft and turboprop aircraft which have significantly different nominal cruising altitudes.

- References & Examples of Use
- [PRC Performance Review Report \(EUROCONTROL 2017\)](#)

KPI19 **Level-off during descent**

Definition Distance and time flown in level flight after Top of Descent.

Measurement Units NM/flight and minutes/flight

Operations Measured Actual IFR flights.

Variants Variant 1: Average distance flown in level flight after Top of Descent
Variant 2: Average time flown in level flight after Top of Descent

Objects Characterized The KPI is typically computed for traffic flows, individual airports, or clusters of airports (selection/grouping based on size and/or geography).

Utility of the KPI This KPI is intended to give an indication of the amount of level flight during the descent phase. Ideally, there should be no level flight during descents because level flight results in a higher fuel burn and possibly more noise. Ideally, aircraft should be able to descend from Top of Descent until touchdown.

Parameters

- Analysis radius: the radius around the analysed airport within which the descent trajectory is analysed (e.g. 200NM).
- Vertical speed limit: maximum vertical speed used to detect the start and end of a level segment (e.g. 300 feet/minute).
- Level band limit: altitude band within which data points have to stay to be included in a level segment (e.g. 200 feet).
- Minimum level time: minimum time duration for a level segment to be considered in the results (e.g. 20 seconds).
- Exclusion box percentage: percentage of the Top of Descent altitude which is used to define the lower altitude of the exclusion box (e.g. 90%). E.g. level segments occurring above the lower altitude limit of the exclusion box and longer than the exclusion box time are excluded from the results.
- Exclusion box time: a level segment in the exclusion box and longer than the exclusion box time is excluded (e.g. 5 minutes).
- Minimum altitude: the altitude where the level segment detection during the descent ends. The trajectory below this altitude is not analysed (e.g. 1800 feet).

Data Requirement For each flight trajectory:

- 4D data points (latitude, longitude, altitude and time)
- Arrival airport ARP coordinates

Data Feed Providers Trajectory data providers (reporting archived actual trajectories based on ADS-B and/or other surveillance data sources) and/or ANSPs.

Formula / Algorithm Level segments in the descent trajectory within the analysis radius are detected using the vertical speed limit and level band limit. The methodology considers a data point as the start of a level segment when the following conditions are met:

- the altitude difference with the next data point is less than or equal to the level band limit; and
- the vertical speed towards the next data point is less than or equal to the vertical speed limit.

The level segment ends when the altitude difference between the altitude of the beginning of the level segment and the altitude of a data point is more than the level band limit or when the vertical speed between two consecutive data points is more than the vertical speed limit.

References &
Examples of Use

- [Comparison of ATM-Related Operational Performance: U.S./Europe \(September 2016\)](#)
- [PRC Performance Review Report \(EUROCONTROL 2017\)](#)
- [European ANS Performance Data Portal](#)



ASBU THREADS

 Concept of Operation

 Elements

Information

AMET

Meteorological information

Information

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Meteorological information provided to support operational efficiency and safety.

Block 0 Global, regional and local meteorological information to support flexible airspace management, improved situational awareness, collaborative decision-making and dynamically optimized flight trajectory planning.

Block 1 Meteorological information supporting automated decision process or aids, involving meteorological information, meteorological information translation, ATM impact conversion and ATM decision support.

Block 2 Integrated meteorological information in support of enhanced operational ground and air decision-making processes, particularly in the planning phase and near-term.

Block 3 Integrated meteorological information in support of enhanced operational ground and air decision-making processes, for all flight phases and corresponding air traffic management operations.

Block 4 Integrated meteorological information supporting both air and ground decision making for all phases of flight and ATM operations, especially for implementing immediate weather mitigation strategies.

ELEMENTS

Element ID Title

AMET-B0/1 Meteorological observations products

AMET-B0/2 Meteorological forecast and warning products

AMET-B0/3 Climatological and historical meteorological products

AMET-B0/4 Dissemination of meteorological products

AMET-B1/1 Meteorological observations information

AMET-B1/2 Meteorological forecast and warning information

AMET-B1/3 Climatological and historical meteorological information

AMET-B1/4 Dissemination of meteorological information

AMET-B2/1 Meteorological observations information -F55-

AMET-B2/2 Meteorological forecast and warning information

AMET-B2/3 Climatological and historical meteorological information

AMET-B2/4 Meteorological information service in SWIM

AMET-B3/1 Meteorological observations information

AMET-B3/2 Meteorological forecast and warning information

AMET-B3/3 Climatological and historical meteorological information

AMET-B3/4 Meteorological information service in SWIM

AMET-B4/1 Meteorological observations information

AMET-B4/2 Meteorological forecast and warning information

AMET-B4/3 Climatological and historical meteorological information

AMET-B4/4 Meteorological information service in SWIM

DAIM

Digital Aeronautical Information Management

Information

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Provision of **aeronautical information services (AIS)** is a State responsibility. States provide an Aeronautical Information Service that focuses on making available the following products: Aeronautical Information publication (AIP), Aeronautical Information Circular (AIC), Aeronautical charts, AIP supplements and NOTAMs.

Block 1 Improved aeronautical information based on **enhanced data quality** (accuracy, resolution, integrity, timeliness, traceability, completeness, format) to support Performance-Based Navigation (PBN), airborne computer-based navigation systems and ground automation. In addition, **digital exchange and processing** of aeronautical information allows a more efficient management of information by avoiding reliance on manual processing and manipulation.

Block 2 The exchange of aeronautical information is now based on **service orientation** in accordance with the SWIM concept.

Fully digital aeronautical information should be the standard and paper aeronautical information should have been abandoned. All airspace users and ANSPs are required to continuously provide and subscribe airspace constraint alerts so that any changes to any constraint are immediately available.

Improvement in the position and time accuracy of the data. All airspace constraints have an applicability time, including static constraints. Additional aeronautical information is provided in support to network operations.

Within this timeframe a considerable amount of traffic in higher and lower airspace is flying. Traditional aeronautical information will be complemented by **new information required to support operations in high airspace or the UAS Traffic Management concept**. A rich dynamic obstacle database is available

ELEMENTS

Element ID Title

DAIM-B1/1 Provision of quality-assured aeronautical data and information

DAIM-B1/2 Provision of digital Aeronautical Information Publication (AIP) data sets

DAIM-B1/3 Provision of digital terrain data sets

DAIM-B1/4 Provision of digital obstacle data sets

DAIM-B1/5 Provision of digital aerodrome mapping data sets

DAIM-B1/6 Provision of digital instrument flight procedure data sets

DAIM-B1/7 NOTAM improvements

DAIM-B2/1 Dissemination of aeronautical information in a SWIM environment

DAIM-B2/2 Daily Airspace Management information to support flight and flow

DAIM-B2/3 Aeronautical information to support higher airspace operations

DAIM-B2/4 Aeronautical information requirements tailored to UTM

DAIM-B2/5 NOTAM replacement

FICE

Flight and Flow Information for a Collaborative Information Environment (FF-ICE)

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline The exchange of messages between ATS units is performed manually using the AFTN and/or via voice. Messages are pre-formatted and have a limited number of characters, which results in limitations on the amount of information that can be exchanged. The dependency of manual action for message exchange generates high probability of miscoordination or lack of it.

Block 0 To improve coordination between air traffic service units (ATSUs) by using ATS interfacility flight data communication. The benefit is the improved efficiency through digital transfer of flight data.

Block 2 Provide the flight information management basis for initial TBO. Implement collaborative coordination and maintenance of advanced flight information for planning, re-planning and ATFM. ATFM considers operator flight preferences. Capacity and demand balancing improvement (better capacity utilization) due to timely and accurate flight information. Mechanisms are in place to support the exchange and synchronization of intent suitable for planning flights pre-departure and in execution. Mechanisms to support ATFM including the update of existing exchange models and/or development of new exchange models for exchange of ATFM initiatives and weather impacts on flight operations. It also includes variations to support new types of operations at the higher and lowest airspace, not used by today's commercial air traffic.

Block 3 Trajectory management integrated with tactical ATC operations. Mechanisms support the synchronization

of intent across applications supporting planning through tactical ATC operations (e.g., separation provision and tactical RSEQ processes). ANSP-to-ANSP coordination processes become trajectory-based providing more seamless boundaries. Information models support the application of dynamic airspace constraints allowing their interaction with the trajectory to be managed strategically or tactically, as appropriate.

- Block 4**
- End-to-end trajectory management to support flight trajectories transition to high density airspace or airports (supports their time-based TS, RSEQ and NOPS).
 - Full FF-ICE which includes multi-ANSP full flight information exchange system and operational agreements.

ELEMENTS

Element ID Title

FICE-B0/1 Automated basic inter facility data exchange (AIDC)

FICE-B2/1 Planning Service

FICE-B2/2 Filing Service

FICE-B2/3 Trial Service

FICE-B2/4 Flight Data Request Service

FICE-B2/5 Notification Service

FICE-B2/6 Publication Service

FICE-B2/7 Flight information management service for higher airspace operations

FICE-B2/8 Flight information management service for low-altitude operations

FICE-B2/9 Flight information management support for inflight re-planning

FICE-B3/1 Flight information management services for enhanced trajectory operations

FICE-B4/1 Integrated flight information management system for end-to-end global flight planning

FICE-B4/2 Real-Time Participation of operators in flight information

SWIM

System Wide Information Management

Information

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Prior to SWIM, store-and-forward based exchange of information is being used between ATM stakeholders (ANSP, airspace users, airport, etc) relying on point-to-point connectivity and protocols using pre-defined messages.

Block 2 **System Wide Information Management (SWIM)** is a new way for managing and exchanging information. It replaces the current ground-ground point-to-point information exchange by an **aviation intranet** relying on internet technologies enabling **information services** to be provided to the ATM community. In order to facilitate publish/subscribe and request/reply based information exchange through

standardised information services, provisions for the information service content and service overview are defined and appropriate SWIM governance established.

In addition, **Air/Ground (A/G) System Wide Information Management** is a capability that enables improved operational awareness and decision making by flight crews by exchanging information with the aircraft and its automation systems. A/G SWIM makes the **aircraft a node** in the network and supports the exchange of information such as trajectories, aeronautical, meteorological, and flight and flow information between ground based ATM components and the flight deck. As a first step, A/G SWIM is supporting the exchange of **non-safety-critical information**.

SWIM governance ensures interoperability for global access to SWIM information by the ATM community.

This thread is an enabler to support all operational improvements that require information.

Block 3 A/G SWIM will become available for the exchange of **safety critical information** between ground ATM components and the aircraft.

ELEMENTS

Element ID Title

SWIM-B2/1 Information service provision

SWIM-B2/2 Information service consumption

SWIM-B2/3 SWIM registry

SWIM-B2/4 Air/Ground SWIM for non-safety critical information

SWIM-B2/5 Global SWIM processes

SWIM-B3/1 Air/Ground SWIM for safety critical information

Operational

ACAS

Airborne Collision Avoidance System (ACAS)

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Airborne collision avoidance system (ACAS) is the last resort safety net for pilots. Although ACAS is independent from the means of separation provision, ACAS is part of the ATM system. ACAS is subject to global mandatory carriage for airplanes with a maximum certificated take-off mass greater than 5.7 tons.

Block 1 The traffic alert and collision avoidance system (TCAS) version 7.1 provides short-term improvements to existing airborne collision avoidance systems (ACAS) to reduce nuisance alerts as well as enhancing the logic for some geometries (i.e., Uberlingen accident). This will reduce trajectory deviations and increase safety in cases where there is a breakdown of separation.

Block 2 Implementation of a new airborne collision avoidance system will support more efficient operations and

airspace procedures while complying with safety regulations. Fewer “nuisance alerts” will reduce pilot and controller workload as personnel spend less time responding to such alerts, increasing safety. Remotely-Piloted Aircraft Systems (RPAS) will be provided with a new collision avoidance function.

ELEMENTS

Element ID Title

ACAS-B1/1 ACAS Improvements

ACAS-B2/1 New collision avoidance system

ACAS-B2/2 New collision avoidance capability as part of an overall detect and avoid system for RPAS

ACDM

Airport Collaborative Decision Making

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline All stakeholders involved in aerodrome operations have their own processes that are conducted as efficiently as possible. However, there is not enough effective information sharing among them. Some basic coordination between ATC and ramp control (which may also be provided by ATC) exists. The aerodromes operate in isolation from the ATM network and aircraft operators manage their operations independently from each other.

Block 0 Aerodrome operators, aircraft operators, air traffic controllers, ground handling agents, pilots and air traffic flow managers share live information that may be dynamic, in order to make better and coordinated decisions. This applies notably in day to day operations and also in case of severe weather conditions or in case of emergencies of all kinds; for these cases A-CDM procedures are referred to in the snow plan, the aerodrome emergency response plan and the aerodrome manual. In some cases, aerodromes are connected to the ATM network via the ATFM function or to ATC through data exchange.

Block 1 Aerodromes are integrated within the ATM Network, from the strategic through all tactical phases. Situational awareness and decision support information is made available to affected stakeholders to establish a common understanding of the various needs and capabilities and make adjustments to assets in order to cope with these needs. Support mechanisms include an Airport Operations Planning (AOP) and an Airport Operations Centre (APOC).

Block 2 Planning and management of airport operations is enhanced through Total Airport Management (TAM), meaning that passenger terminal management is fully integrated with “traditional” A-CDM in order to optimise aerodrome operations and passenger management. Tools and decision support information supporting landside management are made available and interfaced with Airport Operations Centre.

Block 3 All stakeholders are fully connected. All tactical decisions are synchronized and operations are managed by trajectory. All ground processes including aircraft turnaround operations and the landside processes are agreed on the en-route to en-route view of flight operations. Expected ground event times are managed with known impacts to the ATM system, to ensure that the agreed trajectory is consistent with the Airport Operations Plan.

ELEMENTS

Element ID Title

ACDM-B0/1 Airport CDM Information Sharing (ACIS)

ACDM-B0/2 Integration with ATM Network function

ACDM-B1/1 Airport Operations Plan (AOP)

ACDM-B1/2 Airport Operations Centre (APOC)

ACDM-B2/1 Total Airport Management (TAM)

ACDM-B3/1 Full integration of ACDM and TAM in TBO

APTA

Improve arrival and departure operations

Operational

CONCEPT OF OPERATIONS BY BLOCK**Block Description****Baseline Terminal Area Arrival and Departure Procedures**

Where implemented, standard terminal arrival procedures (STARs) provide a defined lateral path for arriving aircraft to connect to the approach. Similarly, Standard Instrument Departure procedures (SIDS), where implemented, provide a lateral path for aircraft to depart the terminal area after take-off. These terminal procedures enable more efficient terminal airspace management.

Approach Procedures

Aircraft with appropriate equipment are capable of flying instrument approaches promulgated as Instrument Approach Procedures, including ILS and RNP APCH. (Prior to the PBN Manual, the RNP APCH approaches were known as GPS or GNSS Approaches). Approach minima are operationally derived from the procedure design, aircraft type and equipage, and supporting ground infrastructure. PBN procedures may be implemented alone or can be added with existing conventional procedures.

Since GNSS can support PBN procedures independent of ground based navigation infrastructure, it is a foundational building block that can enable implementation of PBN to improve arrival, departure and approach operations globally.

Block 0 Terminal Area Arrival and Departure Procedures

Procedures implemented as STARs in terminal airspace provide lateral path guidance to support improving the efficiency in the descent phase of flight by enabling near idle power operations from top of descent, to a point where the aircraft transitions to approach operations. For takeoff, SIDS provide a lateral path that can support continuous climb operations to the top of climb where the cruise phase of flight starts.

Enhanced STARs and SIDS with altitude constraints along the lateral path improve ATC management, and further support operational efficiency by providing vertical profiles that all aircraft can follow.

Approach Procedures

Performance based aerodrome operating minima (PB AOM) allows for implementation of vertically guided approaches at a wider range of aerodromes, and facilitates a phased approach to improvement in approach capabilities. Advanced aircraft with technology such as Enhanced Vision Systems (EVS) benefit from operational credits to continue operations below normal minima.

Helicopter Point in Space procedures allow for access to landing locations other than heliports.

F01

Block 1 Terminal Area Arrival and Departure Procedures

Improvement in airspace management is brought by the utilization of advanced capabilities such as standardized Baro-VNAV functionality and scalable RNP. These optimise descent phase and terminal airspace by providing vertical descent and climb corridors in combination with more precise lateral paths in the terminal area. Such advanced capabilities will reduce the amount of protected airspace vertically and laterally which will enhance the efficiency and flexibility of the terminal airspace design, allowing for optimum arrival and departure operations. These enhancements build on the achievements developed in Block 0.

Approach Procedures

Further development of the PB AOM concept includes more options such as synthetic vision guidance systems (SVGS).

Block 2 Approach Procedures

Development of GBAS Cat II/III approaches allows for an alternative precision approach landing system to be used in low visibility operations.

ELEMENTS

Element ID Title

APTA-B0/1 PBN Approaches (with basic capabilities)

APTA-B0/2 PBN SID and STAR procedures (with basic capabilities)

APTA-B0/3 SBAS/GBAS CAT I precision approach procedures

APTA-B0/4 CDO (Basic)

APTA-B0/5 CCO (Basic)

APTA-B0/6 PBN Helicopter Point in Space (PinS) Operations

APTA-B0/7 Performance based aerodrome operating minima – Advanced aircraft

APTA-B0/8 Performance based aerodrome operating minima – Basic aircraft

APTA-B1/1 PBN Approaches (with advanced capabilities)

APTA-B1/2 PBN SID and STAR procedures (with advanced capabilities)

APTA-B1/3 Performance based aerodrome operating minima – Advanced aircraft with SVGS

APTA-B1/4 CDO (Advanced)

APTA-B1/5 CCO (Advanced)

APTA-B2/1 GBAS CAT II/III precision approach procedures

APTA-B2/2 Simultaneous operations to parallel runways

APTA-B2/3 PBN Helicopter Steep Approach Operations

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Block 1 Enhanced traffic situational awareness and quicker visual acquisition of targets through basic airborne situational awareness during flight operations and visual separation on approach are enabled by the evolutions of ADS-B IN capabilities and associated applications.

In oceanic airspace, the use of Performance Based Longitudinal Separation minima and Performance Based Lateral Separation minima will enable the optimisation of trajectories.

Block 2 The Interval Management (IM) procedure using distance or time will be implemented to improve traffic flow and aircraft spacing.

Within this timeframe a considerable amount of traffic in high upper and lower airspace is flying. In the lower airspace, UTM separation rules apply based on vehicle to vehicle interaction. In the high upper airspace separation is provided strategically through sharing of operators business and mission trajectories.

Block 3 The Interval Management (IM) procedure will be gradually implemented in more complex geometries including departures thanks to upgrades of airborne functionalities and performance based surveillance.

UAS/RPAS will use an airborne functionality to remain well clear from traffic in all phases of flight, even in uncontrolled airspace.

Block 4 Use of airborne conflict detection and resolution to achieve own separation from traffic designated by ATC to enable more efficient flight profile while reducing ATCO workload... At this point in time, there is enough accurate and timely information so that all constraints (static, dynamic, vehicles or obstacles) are separated from each other and are described as spatial temporal volumes with trajectories.

The use of the information allows for performance based separation. This means that the separation is provided based on the performance requirements on time and position of all constraints in the airspace.

ELEMENTS

Element ID Title

CSEP-B1/1 Basic airborne situational awareness during flight operations (AIRB)

CSEP-B1/2 Visual Separation on Approach (VSA)

CSEP-B1/3 Performance Based Longitudinal Separation Minima

CSEP-B1/4 Performance Based Lateral Separation Minima

CSEP-B2/1 Interval Management (IM) Procedure

CSEP-B2/2 Cooperative separation at low altitudes

CSEP-B2/3 Cooperative separation at higher airspace

CSEP-B3/1 Interval Management (IM) Procedure with complex geometries

CSEP-B3/2 Remain Well Clear (RWC) functionality for UAS/RPAS

CSEP-B4/1 Airborne separation

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline En-route trajectories are constrained by the fixed route network, permanently segregated areas, conventional navigation or limited use of area navigation (RNAV), rigid allocation of airspace between civil and military authorities, and rigid sector configurations. Conflict detection is a manual task, performed on the basis of paper/electronic flight strips.

Block 0 En-route trajectories are enhanced by using more direct routings, and collaborative airspace management process and tools. ATCOs are assisted by tools for the conflict identification and conformance monitoring.

Block 1 Block 1 introduces the initial steps towards trajectory-based operations by the enhancement of FRTO B0 processes and system support or the deployment of new processes and system support where necessary.

In continental airspace, the most important operational improvement is related to Free Route Airspace (FRA) as the continuation of direct routing introduced in FRTO B0. For airspace where FRA cannot be deployed, or for connectivity between FRA and terminal manoeuvring areas (TMAs), RNP routes might be considered. Collaborative airspace management is enhanced with new features such as real time airspace management (ASM) data exchanges. Additional system capabilities such as dynamic sectorization intend to align the traffic demand to the available capacity.

Block 2 Block 2 includes further steps towards trajectory-based operations by the enhancement of FRTO B1 processes and system support or the deployment of new processes and system support where necessary applicable to both continental and oceanic airspace where trajectory type operations are common.

The most important operational improvement is related to the large scale cross border Free Route Airspace (FRA) as the continuation of FRTO B1. Large scale FRA (e.g. Continental operations) are envisaged to be widely deployed, except where structure provides for efficient performance-based routings into and out of high density airspace. There is a need ensure a smooth transition between FRA and highly structured airspace based on Dynamic Airspace Configuration (DAC) principles. There is a need for more dynamic, accurate and precise information on constraints allowing the FRA extension and accommodation of different business trajectories.

All trajectories, planned and submitted/shared, are consistent with constraints and associated avoidance measures. This will be supported by Enhanced Collaborative Decision Making (ECDM) processes in the execution phase, enabling optimisation of trajectories in real time. Airspace user's participation in the ECDM will be extended to a higher level of integration between the decision support tools and it will be a major factor for the harmonisation of the competing goals.

One of most important tools to support the ECDM concept is the integration of ATFM and ATC planning by bridging the gap between conventional ATFM planning and conventional sector based ATC planning, maintaining the autonomy and certain level of flexibility of ATC for separation management. The local components of integrated ATFM/ATC planning function are addressed by FRTO B2.

Dynamic Sector Management will evolve into Dynamic Airspace Configuration (DAC), capable of accommodating traffic demand and air traffic flows in real time. DAC will be mainly executed at a network level, FRTO elements cover: the local DAC components to be provided as inputs (ATC sectorisation, airspace structure, and restrictions), the application of dynamic airspace configuration identified at a network Level and the local adaptation and fine-tuning of DAC according to local ATC needs. This

capability will be based on the Network Operations Plan, which will evolve and allow for airspace adaptations at a local level, always taking into account the overall network effect of these changes. In addition, new ATC working methods will be established (like Flight Centric ATC), in order to optimise ATCO workload in this dynamic environment which is not necessarily based on geographical sectors but rather on distribution of logical flows and individual trajectories.

Any airspace user, including manoeuvrable new entrants, operating at regular airspace will follow the same rules and procedures. If they are not manoeuvrable then they will become a dynamic type of restriction.

Within this timeframe a considerable amount of traffic in high upper and lower airspace is flying. These operating environments will be free routing and any new proposal or change to any existing trajectory should be strategically de-conflicted from constraints. Seamless airspace and operations between ATSUs with interoperable ATC tools and systems are envisaged. The tools and system should include at least:

- Enhanced conflict and complexity resolution tools taking into account the network
- Associated trajectory optimisation processes;
- Tools for trajectory coordination, revision and execution.

ELEMENTS

Element ID Title

FRTO-B0/1 Direct routing (DCT)

FRTO-B0/2 Airspace planning and Flexible Use of Airspace (FUA)

FRTO-B0/3 Pre-validated and coordinated ATS routes to support flight and flow

FRTO-B0/4 Basic conflict detection and conformance monitoring

FRTO-B1/1 Free Route Airspace (FRA)

FRTO-B1/2 Required Navigation Performance (RNP) routes

FRTO-B1/3 Advanced Flexible Use of Airspace (FUA) and management of real time airspace data

FRTO-B1/4 Dynamic sectorization

FRTO-B1/5 Enhanced Conflict Detection Tools and Conformance Monitoring

FRTO-B1/6 Multi-Sector Planning

FRTO-B1/7 Trajectory Options Set (TOS)

FRTO-B2/1 Local components of integrated ATFM and ATC Planning function (INAP)

FRTO-B2/2 Local components of Dynamic Airspace Configurations (DAC)

FRTO-B2/3 Large Scale Cross Border Free Route Airspace (FRA)

FRTO-B2/4 Enhanced Conflict Resolution Tools

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Air Traffic Service Unit (ATSU) Alerting Service. ATSUs provide an alerting service according to ICAO Annex 11. ATSUs have the responsibility to assess and set the emergency phases and notify and coordinate with the relevant search and rescue (SAR) authorities, aircraft operators and adjacent ATSUs. Rescue Coordination Centres (RCCs) to operate in accordance with Annex 12.

Block 1 In oceanic areas without automatic surveillance, ATSU Alerting Service is supported with aircraft tracking capability implemented by the aircraft operator. Point of Contact (PoC) information is provided to facilitate establishing contact between relevant Stakeholders in emergency situations.

Block 2 Addition of capabilities to identify and share the location of aircraft in distress, to guide SAR services to the distress site and to recover Flight Data.

ELEMENTS

Element ID Title

GADS-B1/1 Aircraft Tracking

GADS-B1/2 Contact directory service

GADS-B2/1 Autonomous Distress Tracking

GADS-B2/2 Distress tracking information management

GADS-B2/3 Post Flight Localization

GADS-B2/4 Flight Data Recovery

NOPS

Network Operations

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Block 0 The Air Traffic Flow Management (ATFM) is used to manage the flow of traffic in a way that minimizes delay and optimises the use of the entire airspace and available capacity. The management of airspace starts to be integrated with the management of the traffic flows. Some main processes are automated, however substantial procedural support is still required to balance demand with available capacity. Collaborative ATFM can manage traffic flows by:

- smoothing flows and managing rates of sector entry;
- re-route traffic to avoid flow constraint areas;
- level capping;
- collaborative airspace management;
- ATFM slot management including departure information planning;
- adjust flow measures by use of enhanced collaborative flight planning and enhanced tactical flow management.

Block 1 Many AFTM processes are automated, while some elements are still managed procedurally. This module

introduces enhanced processes to manage flows of groups of flights in order to improve overall fluidity. It refines ATFM techniques, integrates the management of airspace and traffic flows through a holistic network operational planning dynamic/rolling process in order to achieve greater efficiency and enhance network performance. It also increases the collaboration among stakeholders in real time so as to better know the Airspace Users preferences, to inform on system capabilities and ATC capacity and further enhance Collaborative Decision Making (CDM) to address specific issues/circumstances, including Airspace Users flight prioritisation input as regards ATFM measures.

Airports operations planning starts to be integrated in the network operations planning.

ATFM includes the following main features:

- management of occupancy counts and application of ATFM measures;
- management of arrival/ overfly times (TTA/TTOs);
- enhanced Network Operation Planning;
- enhanced ATFM slot management;
- integration of network planning and airport planning;
- dynamic/rolling airspace management process;
- management of dynamic airspace configurations;
- complexity management;
- ATFM contribution to the extended Arrival Management.

Block 2 ATFM evolves to support Trajectory Based Operations (TBO). There will be an improved Trajectory Forecast based on the qualification and quantification of uncertainties, probabilistic approaches, and enriched en-route and airport information sharing.

Enhanced Demand and Capacity Balancing (DCB) provides capabilities which create a paradigm shift with all stakeholders expressing dynamically and precisely their needs which have to be accommodated within an agreed performance framework.

The Collaborative Network Operations Planning will be further enhanced.

Initial steps towards Airspace Users' driven priorities and the extended airports integration with the ATM Network Planning are envisaged.

Within this timeframe a considerable amount of traffic in high upper and lower airspace is flying. Due to the characteristics of this traffic, the principles of block 4 network operations are exhibited at higher airspace and within the UTM airspace.

Block 3 ATFM further supports trajectory based operations (TBO) based on the use of the more precise information provided by the different nodes of the air navigation system (aircraft becomes a node of information). All vehicles participate in intent sharing and airspace intent network is in place).

Collaborative Network Operations becomes cooperation in network operations. This means providing optimal flow planning for pre-flight and active flight trajectories that will be impacted by another network operational region supported by common procedures and exchanges.

Block 4 ATFM shifts from trajectory management to airspace constraints management. The availability of more timely accurate information allows for a shift on the provision of DCB, capacity accommodates demand and not vice versa therefore airspace users plan and execute their own business and mission trajectories based on real time management of the constraints by the ANSPs.

ELEMENTS

Element ID Title

NOC-004 Initial Introduction of Collaborative Decision Making with the ATFM Management

NOPS-B0/1 Initial integration of collaborative airspace management with air traffic flow management

NOPS-B0/2 Collaborative Network Flight Updates

NOPS-B0/3 Network Operation Planning basic features

NOPS-B0/4 Initial Airport/ATFM slots and A-CDM Network Interface

NOPS-B0/5 Dynamic ATFM slot allocation

NOPS-B1/1 Short Term ATFM measures

NOPS-B1/2 Enhanced Network Operations Planning

NOPS-B1/3 Enhanced integration of Airport operations planning with network operations planning

NOPS-B1/4 Dynamic Traffic Complexity Management

NOPS-B1/5 Full integration of airspace management with air traffic flow management

NOPS-B1/6 Initial Dynamic Airspace configurations

NOPS-B1/7 Enhanced ATFM slot swapping

NOPS-B1/8 Extended Arrival Management supported by the ATM Network function

NOPS-B1/9 Target Times for ATFM purposes

NOPS-B1/10 Collaborative Trajectory Options Program (CTOP)

NOPS-B2/1 Optimised ATM Network Services in the initial TBO context

NOPS-B2/2 Enhanced dynamic airspace configuration

NOPS-B2/3 Collaborative Network Operation Planning

NOPS-B2/4 Multi ATFM slot swapping and Airspace Users priorities

NOPS-B2/5 Further airport integration within Network Operation Planning

NOPS-B2/6 ATFM adapted for cross-border Free Route Airspace (FRA)

NOPS-B2/7 UTM Network operations

NOPS-B2/8 High upper airspace network operations

NOPS-B3/1 ATM Network Services in full TBO context

NOPS-B3/2 Cooperative Network Operations Planning

NOPS-B3/3 Innovative airspace architecture

OPFL

Improved access to optimum flight levels in oceanic and remote airspace

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Block 0: Use of in-trail procedure (ITP) enables equipped aircraft to change flight levels through otherwise blocked

Block 0 Use of in-trail procedure (ITP) enables equipped aircraft to change flight levels through otherwise blocking traffic for the purpose of flight efficiency or to avoid turbulence.

Block 1 Use of ADS-Bthe in-trail procedure (ITP) IN technologyprocedures enables equipped aircraft to change flight levels through otherwise blocking traffic for the purpose of flight efficiency or to avoid turbulence.

Block 2 Lateral offsets climb and descend within standard separation buffer. Supports Free-Routing by providing tactical maneuvering accommodation to support cruise climb/descent (e.g. flight deck supported procedures for climbs/descends according to the sep minima). No difference between oceanic or continental airspace is made at this point.

ELEMENTS

Element ID Title

OPFL-B0/1 In Trail Procedure (ITP)

OPFL-B1/1 Climb and Descend Procedure (CDP)

RATS

Remote Aerodrome Air Traffic Services

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Aerodrome ATS are provided by an on-site tower.

Block 1 Aerodrome ATS may be provided from a facility other than an on-site tower, this 'remote' facility could be physically located at the aerodrome or at a distant location.

ELEMENTS

Element ID Title

RATS-B1/1 Remotely Operated Aerodrome Air Traffic Services

RSEQ

Improved traffic flow through runway sequencing

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Air traffic controllers use local and manual procedures and their expertise to sequence departures or arrivals in real time. This is generally leading to sub-optimal solutions both for the realized sequence and the flight efficiency, especially in terms of taxi times and ground holding for departures, and in terms of holding for arrivals. In some cases, user preference is addressed through airspace user access to pre-departure arrival time booking and swapping system integrated with arrival management process.

Block 0 Arriving flights are "metered" and sequenced by arrival ATC based on inbound traffic predication information, optimizing runway utilization. Also departures are sequenced allowing improved start/push-

back clearances, reducing the taxi time and ground holding, delivering more efficient departure sequences and reduce surface congestion.

Block 1 Extension of arrival metering and integration of surface management with departure sequencing to improve runway management.

Block 2 Integrated arrival management and departure management to enable dynamic scheduling and runway configuration to better accommodate arrival/departure patterns and integrate arrival and departure management. In addition, integrated arrival management and departure management expands scope from single airport operations to take into account multiple airports within the same terminal airspace.

Block 3 Extended metering within an integrated AMAN, SMAN and DMAN environment to enable dynamic scheduling and support network operations based on full FF-ICE which includes multi-ANSP. Flight information exchange system and operational agreements. Transition operations, including approach and departure to and from runways is supported by automation that runs time based separation to the threshold with display characteristics to support the operations. By this timeframe, full time-based management across merge points, departure and arrival airports is in place.

Block 4 The increase in the use of accurate time and position constraints allows a shift from traffic synchronization managed by the ANSP setting target times to fulfilling the business and mission trajectory target time at the runway.

ELEMENTS

Element ID Title

RSEQ-B0/1 Arrival Management

RSEQ-B0/2 Departure Management

RSEQ-B0/3 Point merge

RSEQ-B1/1 Extended arrival metering

RSEQ-B2/1 Integration of arrival and departure management

RSEQ-B2/2 Arrival management in terminal airspace with multiple airports

RSEQ-B3/1 Departure management in terminal airspace from multiple airports

RSEQ-B3/2 Extended arrival management supporting overlapping operations into multiple airports

RSEQ-B3/3 Increased utilization of runway capacity by improved real-time runway scheduling

RSEQ-B3/4 Improved operator fleet management in runway sequencing

SNET

Ground-based Safety Nets

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Block 0 Ground Based Safety Nets are an integral part of the ATM system using primarily ATS surveillance data with warning times of up to two minutes. Upon receiving an alert, air traffic controllers are expected to immediately assess the situation and take appropriate action if necessary.

The goal of current Ground Based Safety Nets is collision avoidance, or the avoidance of collision with terrain or obstacles, or to warn the controllers of the unauthorized penetration of an airspace.

Alerts from short- term conflict alert (STCA), area proximity warnings (APW), minimum safe altitude warnings (MSAW) and approach path monitoring (APM) are proposed.

Ground-Based Safety Nets do not change the way air traffic controllers perform their work and have no influence on the calculation of the sector capacity.

Block 1 Technological advantages will bring new opportunities, including the possibility to develop new or enhanced Ground-Based Safety Nets. But these advantages shall not compromise the robustness and the safety performance of the Safety Nets in operation.

Thanks to ADS-B and Mode S Enhanced Surveillance, ground based safety nets can be provided with airborne data enabling performance improvements (less nuisance alerts, earlier positive alerts). However, a very important point is the compatibility of STCA with airborne safety nets. In particular, the compatibility between STCA and ACAS needs constant improvement whilst maintaining their independence.

ELEMENTS

Element ID Title

SNET-B0/1 Short Term Conflict Alert (STCA)

SNET-B0/2 Minimum Safe Altitude Warning (MSAW)

SNET-B0/3 Area Proximity Warning (APW)

SNET-B0/4 Approach Path Monitoring (APM)

SNET-B1/1 Enhanced STCA with aircraft parameters

SNET-B1/2 Enhanced STCA in complex TMAs

SURF

Surface operations

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Traditional surface movement guidance and control system (SMGCS) implementation (visual surveillance, aerodrome signage, lighting and markings). Surface operations are comprising all operations on the platform including those dedicated to airport maintenance functions.

Block 0 This module aims to enhance the situational awareness of Air Traffic Controllers and pilots during ground operations by the provision of the aerodrome surface situation on their respective displays being A-SMGCS for the controller or electronic maps in the cockpit. Some initial alerting services for prevention of runway incursions are proposed to the controller.

Block 1 Using capabilities offered by enhanced surveillance of the surface and new capabilities to support traffic management during ground operations, additional assistance is provided to aerodrome controllers and pilots by enhancement of alerting services and improved vision of the situation on the surface. The improved management of taxi times through improved routing services allow to gain predictability and

performance to support runway sequencing. -F71-

Block 2 Full situational awareness is provided to all actors including vehicle drivers. Small UAS operating airport specific functions (e.g. runway inspection, calibration, inspections, ...) are integrated in A-SMGCS. Enhanced vision systems allow to perform optimum surface management in Low Visibility Conditions. Complete predictability and efficiency of ground operations at all conditions contribute to trajectory-based operations.

Block 3 The complete and reliable knowledge of ground traffic with associated data and information allow for development of automation and optimization of Surface Traffic Management in complex situation. The performance of the management of the Surface can be anticipated and computed. It is supporting as such full synchronization of tactical decisions and full trajectory-based operations. RPAS are part of the traffic.

ELEMENTS

Element ID Title

SURF-B0/1 Basic ATCO tools to manage traffic during ground operations

SURF-B0/2 Comprehensive situational awareness of surface operations

SURF-B0/3 Initial ATCO alerting service for surface operations

SURF-B1/1 Advanced features using visual aids to support traffic management during ground operations

SURF-B1/2 Comprehensive pilot situational awareness on the airport surface

SURF-B1/3 Enhanced ATCO alerting service for surface operations

SURF-B1/4 Routing service to support ATCO surface operations management

SURF-B1/5 Enhanced vision systems for taxi operations

SURF-B2/1 Enhanced surface guidance for pilots and vehicle drivers

SURF-B2/2 Comprehensive vehicle driver situational awareness on the airport surface

SURF-B2/3 Conflict alerting for pilots for runway operations

SURF-B3/1 Optimization of surface traffic management in complex situations

TBO

Trajectory-based operations

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Block 0 Introduction of time-based management within a flow centric approach.

Block 1 Initial Integration of time-based decision making processes.

Block 2 Pre-departure trajectory synchronization within a flight centric and network performance approach.

Extended time-based management across multiple FIRs for active flight synchronization.

Block 3 Network performance on demand synchronization of trajectory-based operations.

Block 4 Total airspace management performance system.

ELEMENTS

Element ID Title

TBO-B0/1 Introduction of time-based management within a flow centric approach.

TBO-B1/1 Initial Integration of time-based decision making processes

TBO-B2/1 Pre-departure trajectory synchronization within a flight centric and network performance approach

TBO-B2/2 Extended time-based management across multiple FIRs for active flight synchronization

TBO-B3/1 Network based on-demand synchronization of trajectory based operations

TBO-B4/1 Total airspace management performance system

WAKE

Wake Turbulence Separation

Operational

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Wake turbulence separation minima applied to IFR flights is provided based PANS ATM DOC.4444 **three** aircraft wake turbulence **categories** (heavy, medium and light). The wake turbulence separation does not apply to VFR flights neither to IFR flights executing visual approach when the aircraft has reported having the preceding aircraft in sight although the ATC unit concerned will issue a caution of possible wake turbulence when appropriate.

Block 1 Wake turbulence separation applied to IFR flights is provided based on **7 groupings** of aircraft wake turbulence.

In airports with **parallel runways** with runway centre lines spaced less than 760m (2500 ft) apart, under certain wind conditions, wake turbulence separation can be reduced on dependent parallel approaches or wake turbulence independent departures.

Independent segregated parallel operations can be undertaken.

Block 2 Wake turbulence separation applied to IFR flights is provided based on leader/follower static pair-wise wake separations delivered either through a tailored **7 (or more) groups** of aircraft or a decision support tool referring to an **aircraft pairwise** separation matrix .

In airports with **parallel runways** with runway centre lines spaced less than 760m (2500 ft.) apart, under monitored wind conditions, wake turbulence separation can be reduced on dependent parallel approaches or wake turbulence independent departures.

Independent segregated parallel operations can be realised, based on static pair-wise wake separations.

Block 3 Wake turbulence separation applied to IFR flights is provided based on a **time based** leader/follower time based **pair-wise** wake separations delivered through a decision support tool referring to an aircraft pairwise separation matrix.

In airports with **parallel runways** with runway centre lines spaced less than 760m (2500 ft.) apart, under monitored wind conditions, wake turbulence separation can be further reduced on dependent parallel approaches or wake turbulence independent departures using time based separation minima.

Wake separation minima on **independent segregated parallel** runway operations can be further reduced, based on pair-wise time based wake separations.

ELEMENTS

Element ID Title

WAKE-B2/1 Wake turbulence separation minima based on 7 aircraft groups

WAKE-B2/2 Dependent parallel approaches

WAKE-B2/3 Independent segregated parallel operations

WAKE-B2/4 Wake turbulence separation minima based on leader/follower static pairs-wise

WAKE-B2/5 Enhanced dependent parallel approaches

WAKE-B2/6 Enhanced independent segregated parallel operations

WAKE-B2/7 Time based wake separation minima for arrival based on leader/follower static pair-wise

WAKE-B2/8 Time based wake separation minima for departure based on leader/follower static pair-wise

WAKE-B3/1 Time based dependent parallel approaches

WAKE-B3/2 Time based independent segregated parallel operations

WAKE-B4/1 En-route Wake Encounter Ground based Prediction

WAKE-B4/2 En-Route Wake Encounter on-board flight management/mitigation

CNS technology and services

ASUR

Surveillance systems

Technology

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Aircraft surveillance is accomplished through the use of non cooperative and cooperative surveillance radar. Non cooperative surveillance radar derives aircraft position based on radar echo returns. Cooperative surveillance radar is used to transmit and receive aircraft data for barometric altitude, identification code. However, non cooperative and cooperative surveillance radars cannot be easily sited in oceanic locations, or rough terrain such as in mountainous regions, and have a heavy reliance on mechanical components with large maintenance requirements.

Block 0 Surveillance is provided supported by new technologies such as ADS-B OUT and wide area multilateration (MLAT) systems. These capabilities will be used in various ATM services, e.g., traffic information, search and rescue, and separation provision. ADS-B OUT and MLAT systems complement

existing cooperative surveillance radar and may be deployed independently or together. Depending on local airspace needs, ADS-B or MLAT may replace cooperative radar.

Block 1 ADS-B surveillance is provided using receivers on spacecraft, allowing improved options for surveillance in oceanic and remotes areas.

Block 2 The evolution of ADS-B and transponder avionics provides new aircraft/atmospheric information to support ANSP and vehicle-to-vehicle applications. New community and internet-based surveillance system to track airborne vehicles at low altitudes and/or high altitudes. Performance-based surveillance framework is provided for ANSP services. Within this timeframe, vehicle identities/positions/velocities may be shared using the internet. Automated dependent surveillance broadcast vehicle-to-vehicle potentially is provided in a different spectrum in lower airspace for small RPA operations.

Block 3 All aircraft identities/positions/velocities are provided/shared by the operator using an aviation network. A performance-based surveillance framework allows ANSPs to determine the most effective blend of surveillance methods. Cooperative surveillance is expected to be the principal means of surveillance and is typically provided by ADS-B and MLAT systems; rotating radars will be replaced at end-of-life where appropriate. New passive non-cooperative surveillance techniques available to provide such services at lower cost.

ELEMENTS

Element ID Title

ASUR-B0/1 Automatic Dependent Surveillance – Broadcast (ADS-B)

ASUR-B0/2 Multilateration cooperative surveillance systems (MLAT)

ASUR-B0/3 Cooperative Surveillance Radar Downlink of Aircraft Parameters (SSR-DAPS)

ASUR-B1/1 Reception of aircraft ADS-B signals from space (SB ADS-B)

ASUR-B2/1 Evolution of ADS-B and Mode S

ASUR-B2/2 New community based surveillance system for airborne aircraft (low and higher airspace)

ASUR-B3/1 New non-cooperative surveillance system for airborne aircraft (medium altitudes)

ASUR-B4/1 Further evolution of ADS-B and MLAT

COMI

Communication infrastructure

Technology

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline **Air-Ground**

Air-ground ATS communications have been historically accomplished through the use of voice communications between pilots and controllers.

Voice over HF has been the traditional communication means to provide Air Traffic Services (ATS) over oceanic and remote airspace.

Voice over VHF has been the traditional communication means to ensure Air Traffic Services over

domestic airspace. Voice over SATCOM is used as a backup means for emergency situations.

Ground-Ground

Ground-Ground ATS communication has been using Aeronautical Fixed Telecommunication Network (AFTN) over dedicated low speed circuits (2.4-9.6Kbps) to support the exchange of Flight plan/Clearance/Transfer between ANSPs. The ATS voice communication is used for routine communication when the AFTN infrastructure is not available. ATS voice communication is also utilized in case of emergency.

Block 0 Air-Ground

VHF, HF and SATCOM \Communications:

- VHF Voice Communications remains the primary means of information exchange in most regions.
- Continued use of the ACARS Network to support the distribution of ATS message sets (FANS)
- Introduction of the ATN/OSI Network to support B1
- Continued use of VDL Mode 2 to support ATN/OSI and FANS.
- Continued use of SATCOM Class C, VDL Mode0/A and VDL Mode 2 as Datalinks to support Terrestrial, Oceanic and Remote Airspace and as a complement to voice and in order to reduce voice channel congestion and increase capacity.
- Continued use of HF DL as the Datalink to support Oceanic Airspace as a complement to voice and in order to reduce voice channel congestion and increase capacity.

Ground-Ground

Deployment of IP based AMHS linked service:

- as an improvement over AFTN in term of bandwidth and length of the message,
- as a mean to enhance traffic transfer between ANSPs by expanding the use of ATS Inter-Facility Communication Data (AIDC) to improve efficiency of air traffic management by reducing the use of ATS voice service.

Block 1 Air-Ground

Improved Terrestrial Data Communications:

- VHF Voice Communications remains the primary means of information exchange in most regions.
- Introduction of the VDL Mode 2 Multi-Frequency design to accommodate increased capacity and reduce interference.
- Introduction of the New SATCOM Class B Satellite Datalinks to increase performance and deliver increased ATN/OSI and ACARS network connectivity.

Ground-Ground

Introduction of IP based network to replace point-to-point circuits:

- AMHS with extension service to support XML, FTBP (IWXMM).
- Expansion of AIDC to enhance efficiency and safety.
- Implement regional IP networks.
- AeroMACS circuits for airport local communications.

Block 2 Air-Ground

Improved Link Performance:

- VHF Voice Communications remains the primary means of information exchange in terminal area, however a major shift toward greater use of Datalink in the enroute and surface domains is envisioned.

- Introduce Connectionless VDL Mode-2 design to improve performance and spectrum efficiency.
- Introduce new SATCOM Class B systems to support both voice and data operations with total global coverage.
- Introduction of the ATN/IPS Network technology to improve datalink performance, support message routing and multilink environments, improve system cyber-security and achieve cost reductions.
- AeroMACS for aircraft mobile connection.

Ground-Ground

- Implement network services.
- Implement AMHS/IP addressing gateway to support legacy services during transition.
- Connect regional IP networks to provide for a federated aviation network for exchange of information.

Converged (both g/g and a/g) communications

- Make use of available link technologies meeting performance requirements to provide aviation communications for non-safety critical information.

Block 3 Air-Ground

IP-based connection and broadband communication links:

- Introduce SATCOM Class A into Oceanic and Domestic Airspace to provide improve link performance and to achieve increased resiliency through the use of commercially available Satellite constellations which meet the ATS performance requirements.
- Introduce new Broadband A/G Communication systems (LDACS) to support increasingly large messages with stringent requirements and digital products.

Converged (both g/g and a/g) communications

- Make use of available link technologies meeting performance, interoperability and certification requirements to provide aviation communications for safety critical information.

ELEMENTS

Element ID Title

COMI-B0/1 Aircraft Communication Addressing and Reporting System (ACARS)

COMI-B0/2 Aeronautical Telecommunication Network/Open System Interconnection (ATN/OSI)

COMI-B0/3 VHF Data Link (VDL) Mode 0/A

COMI-B0/4 VHF Data Link (VDL) Mode 2 Basic

COMI-B0/5 Satellite communications (SATCOM) Class C Data

COMI-B0/6 High Frequency Data Link (HFDL)

COMI-B0/7 ATS Message Handling System (AMHS)

COMI-B1/1 Ground-Ground Aeronautical Telecommunication Network/Internet Protocol Suite (ATN/IPS)

COMI-B1/2 VHF Data Link (VDL) Mode 2 Multi-Frequency

COMI-B1/3 SATCOM Class B Voice and Data

COMI-B1/4 Aeronautical Mobile Airport Communication System (AeroMACS) Ground-Ground

COMI-B0/4 Air-Ground ATN/IPS

COMI-B2/2 Aeronautical Mobile Airport Communication System (AeroMACS) aircraft mobile connection

COMI-B2/3 Links meeting requirements for non-safety critical communication

COMI-B3/1 VHF Data Link (VDL) Mode-2 Connectionless

COMI-B3/2 SATCOM Class A voice and data

COMI-B3/3 L-band Digital Aeronautical Communication System (LDACS)

COMI-B3/4 Links meeting requirements for safety critical communication

COMS

ATS Communication service

Technology

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Air-ground ATS communications have been historically accomplished through the use of voice communications between pilots and controllers.

Voice over HF has been the traditional communication means to provide Air Traffic Services over oceanic and remote airspace.

Voice over VHF has been the traditional communication means to provide Air Traffic Services over domestic airspace. Voice over SATCOM is used as a backup means for emergency situations.

Block 0 Introduction of air-ground ATS data link services:

- **CPDLC (ATN B1)** as a complement to voice for domestic airspace in order to reduce voice channel congestion and increase capacity,
- **CPDLC and ADS-C (FANS 1/A)** as a means to improve communications and surveillance in airspace where procedural separation is being applied.

Block 1 Extension of air-ground ATS data link services:

- **CPDLC (FANS 1/A+)** as a complement to voice for domestic airspace in order to reduce voice channel congestion and increase capacity,
- **PBCS approved CPDLC and ADS-C (FANS 1/A+)** as a means to apply reduced separations in airspace where procedural separation is being applied.

Introduction of **Satellite Voice Communications** in airspace where procedural separation is being applied for routine communications in support of Air Traffic Services.

Block 2 Extension of air-ground ATS data link services:

- **CPDLC and ADS-C (B2)** as a means to increase automation on ground and aircraft systems, gradually moving towards full and continuous air-ground synchronization of the aircraft trajectory.

Extension of **Satellite Voice Communications with PBCS approved systems** in airspace where procedural separation is being applied to support further reduction of separations.

Block 3 Extension of air-ground ATS data link services:

- **Extended CPDLC and ADS-C (B2)** as a means to increase further automation on ground and aircraft systems, supporting the introduction of Advanced Interval Management and dynamic RNP operations.

ELEMENTS

Element ID Title

COMS-B0/1 CPDLC (FANS 1/A & ATN B1) for domestic and procedural airspace

COMS-B0/2 ADS-C (FANS 1/A) for procedural airspace

COMS-B1/1 PBCS approved CPDLC (FANS 1/A+) for domestic and procedural airspace

COMS-B1/2 PBCS approved ADS-C (FANS 1/A+) for procedural airspace

COMS-B1/3 SATVOICE (incl. routine communications) for procedural airspace

COMS-B2/1 PBCS approved CPDLC (B2) for domestic and procedural airspace

COMS-B2/2 PBCS Approved ADS-C (B2) for domestic and procedural airspace

COMS-B2/3 PBCS approved SATVOICE (incl. routine communications) for procedural airspace

COMS-B3/1 Extended CPDLC (B2 incl. Adv-IM and dynamic RNP) for dense and complex airspace

COMS-B3/2 Extended ADS-C (B2 incl. Adv-IM and dynamic RNP) for dense and complex airspace

NAVS

Navigation systems

Technology

CONCEPT OF OPERATIONS BY BLOCK

Block Description

Baseline Before Block 0, navigation systems deployed and in operation are a combination of ground-based navigation systems (NDB, VOR, DME, ILS), and global satellite-based navigation systems (**GNSS**). Airborne Based Augmentation Systems (**ABAS**), Ground-Based Augmentation System (**GBAS**) and Satellite-Based augmentation systems (**SBAS**) augment a single frequency of GPS and GLONASS constellations, but GLONASS utilization remains limited at this stage.

ABAS is the widest available development, including GNSS hybridization with inertial system (INS)/barometric vertical navigation (Baro-VNAV) and largely supports PBN implementation, but its performance is not as optimal as SBAS and GBAS, in particular for approach and landing phases of flight. The implementation of ground-based conventional navigation systems starts to decrease in number with the rationalization of conventional infrastructure through Navigation Minimum Operating Networks (NAV MON), while the implementation of satellite-based navigation systems starts to increase.

ABAS and SBAS support PBN implementation for all phases of flight down to Category I precision approaches. GBAS supports approach and landing operations down to Category I minima.

Three SBAS are certified for PBN operations: WAAS in North America (US, Canada and Mexico), EGNOS in Europe, MASAS in Japan. A few certified GBAS are deployed worldwide, including US, Australia, Germany and Spain.

Block 0 GBAS is provided to support precision approach and landing operations at a specific airport, in particular

Category I operation utilizing GBAS Approach Service Type C (GAST-C), with the improved accuracy, integrity, and availability of satellite navigation.

SBAS and **ABAS** are implemented as a mean to comply with ICAO Assembly Resolution A37-11 regarding Vertically-Guided Approach. SBAS is provided to support PBN in all phases of flight with increased accuracy and integrity. ABAS is provided to support non-precision (LNAV) and vertically-guided approach with Baro-VNAV as well as other terminal and en-route navigations.

Rationalization of conventional navigation aid infrastructure through **Minimal Operating Networks** starts to happen and supports a reduction in the number of NDBs, VORs, and, where appropriate in some States, ILS. Alternative Positioning, Navigation, and Timing is based upon a combination of existing ground nav aids, airborne inertial systems and ATC procedures.

Block 1 With enhanced ionospheric monitoring and mitigation as well as enhanced VHF Data Broadcast receiver performance, **extended GBAS** is provided to support precision approach and landing operations at a specific airport, particularly Category II operation utilizing GAST-C and Category II/III operation utilizing GAST-D, with the improved accuracy, integrity, and availability.

Within this Block 1 timeframe, new core constellations and new signals are available for civil aviation use (multi-constellation concept), i.e. Galileo (Europe) and Beidou (China), and support dual frequency navigation signals. GPS (USA) and GLONASS (Russia) also evolve to support dual frequency navigation signals.

Rationalization of the conventional infrastructure through Minimal Operating Networks continues to be implemented and supports a reduction in the number of NDBs, VORs, and, where appropriate in some States, ILS. Alternative Positioning, Navigation, Timing remains based upon a combination of existing ground nav aids, airborne inertial systems and ATC procedures. New APNT infrastructure is being explored and evaluated.

Block 2 Dual-Frequency Multi-Constellation (DF/MC) GBAS, SBAS, and ABAS start to be provided, improving the resolution of atmospheric propagation errors affecting navigation core constellation signals and supporting additional robustness, compared to single frequency interference.

Block 3 Airborne equipage for Dual-Frequency Multi-Constellation (DF/MC) including GBAS, SBAS and ABAS capabilities will grow over time. Additional technology developments to support more robust navigation may become matured and be deployed in some regions. Technologies developed to support widespread UAS deployment could potentially be adopted as part of these improvements to robust navigation.

Rationalization of conventional navigation aids will continue when the dependency on GNSS signals is alleviated by new technologies. New support technologies necessary for GNSS cyber security will be deployed in this timeframe (e.g. key management and distribution systems for cryptographic GNSS signal authentication systems). Technologies for GNSS anti-spoofing will be standardized and deployed to some degree.

Block 4 GNSS will be the primary means of navigation globally with conventional navigation aids maintained only as necessary for backup capability. Dual-Frequency Multi-Constellation (DF/MC) airborne equipage will be deployed on most of the fleet supported by more robust backup technologies allowing operations during GNSS unavailability. More advanced sensor fusions for increased operational autonomy will be introduced (i.e. less reliance on external or single thread systems and services) for greater reliability of navigation capabilities.

ELEMENTS

Element ID Title

NAVS 001 Ground Based Augmentation Systems (GBAS)

NAVS-B0/1 Ground Based Augmentation Systems (GBAS)

NAVS-B0/2 Satellite Based Augmentation Systems (SBAS)

NAVS-B0/3 Aircraft Based Augmentation Systems (ABAS)

NAVS-B0/4 Navigation Minimal Operating Networks (Nav. MON)

NAVS-B1/1 Extended GBAS

NAVS-B2/1 Dual Frequency Multi Constellation (DF MC) GBAS

NAVS-B2/2 Dual Frequency Multi Constellation (DF MC) SBAS

NAVS-B2/3 Dual Frequency Multi Constellation (DF MC) ABAS

Appendix C – Regional SWOT analysis examples

Reference: 2020 – 2021 SAM Regional workshops

| STRENGTHS |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACTIVE REGIONAL PLANS. FRAME ALIGNED TO GLOBAL PLANS (GANP, GASP, GASEP). |
| IMPULSE TO ATM/CNS IMPLEMENTATION AND SUPPORT SERVICES. CNS RESOURCES AND REGIONAL COORDINATION. REGIONAL IP NETWORK – REDDIG. |
| AIRLINES / INDUSTRY DEVELOPED. STATE/STAKEHOLDERS RELATIONSHIP. |
| AUTHORITIES / REGULATORS. REGULATORY STRUCTURE (LARS) |
| REGION INTEGRATED IN SOCIAL-POLITICAL ASPECT. REGIONAL IMPLEMENTATION AND FOLLOW-UP FORUMS. |
| LEADERSHIP OF RO SAM ICAO. UNIT RESPONSE OF THE REGION/INDUSTRY TO THE HEALTH EMERGENCY. |
| STRUCTURE OF AIR SPACE. SEAMLESS. HARMONIZED ATS CONTINGENCY PLANS. |
| ICAO TECHNICAL COOPERATION – PROJECTS RLA 06 901, SRVSOP, ETC. TECHNICAL DOCUMENTATION / REGIONAL GUIDES. ICAO PORTAL. |
| COMPETENT PROFESSIONAL STAFF, AND EXPERIENCED. |
| AIRPORT OPERATION MODEL. TECHNICAL IMPROVEMENTS/OPERATIONAL SAFETY. REGULATOR OVERSIGHT. |
| REGIONAL HUBS. INFRASTRUCTURE SUPPORTS REGIONAL CONNECTIVITY. |
| |
| WEAKNESSES |
| LACK OF REGIONAL STRUCTURE ANS MORE RESILIENT. TECHNOLOGY/BACKUP UNITS - BACKUPS. |
| EXCESSIVE ROTATION IN PUBLIC ADMINISTRATION. MANAGEMENT MODEL FOR ANS/AUTHORITY/INDUSTRY. DIFFICULTY COORDINATING BETWEEN SYSTEM ACTORS. |
| CUMBERSOME OR SLOW BUDGET EXECUTION FOR TECHNOLOGY ADMISSION. REQUIRES PROPER PREPARATION T.O.R. |
| MANAGEMENT OF NATIONAL PNNA PLANS. FOCUS OF PROGRAMS/ PROJECTS FOR IMPLANTATION. |
| CNS INTEROPERABILITY STILL IN PROCESS. DEPENDENCE AND GAPS OF TECHNICAL EQUIPMENT AND MAINTENANCE. |
| DISCONTINUED IMPLANTATION IN THE ANS. GAPS IN THE QMS OF MET AND AIM. SSP AND SMS SYSTEMS STILL IN PROCESS. |
| SPECIALIZED TRAINING, SIMULATORS AND OJT (AIM, PANSOPS, ETC.) COSTLY AND/OR ESCAZA. THERE IS NO NEED TO ORIENT GLOBAL PLANS. IMPLEMENTATION ANS (EXAMPLE FUA, ATFM) INCOMPLETE. |
| HUMAN RESOURCES. GAP/GENERATIONAL CHANGE. HUMAN TALENT POLICIES/MANAGEMENT - CAREER PLAN. KNOWLEDGE TRANSFER/TECHNOLOGY. |
| COMMUNICATION / COOPERATION INTERREGIONAL CARIBE - SOUTH AMERICA AND OTHERS. |
| CERTIFICATION OF AIRPORTS AFFECTED BY CONCESSION SCHEME. |
| LIMITED AIR CONNECTIVITY IN THE REGION |
| |
| OPPORTUNITIES |
| GANP/ 6 -ASBU. FOUR LAYERS AND INDICATORS. |
| DEVELOPMENT OF REGIONAL/NATIONAL PLANS. CIVIL AVIATION AS A DEVELOPMENT ENGINE. |
| ECONOMIC FOSTERING. ACCESSIBLE FINANCING. |
| INNOVATION, RESEARCH AND DEVELOPMENT IN TECHNOLOGY FOR ANS DELIVERY. |
| TENDENCY TO RESILIENCE AND COST/EFFICIENCY. RESILIENT PROCESSES/LESSONS LEARNED. |
| USOAP AUDITS. |
| TRANSITORY LOW DEMAND PERMITS INTERNAL IMPROVEMENT ACTIVITIES (ADMINISTRATION, PROCEDURES, ATM, ETC.). |
| GREATER ACCESS TO COURSES, VIRTUAL MEETINGS/WORKSHOPS. PARTICIPATION OF EXPERTS, SYNERGY. |
| VIRTUALIZED/AUTOMATED ANS SERVICES. EFFICIENT USE OF RESOURCES AND DATABASE. REGULATOR SURVEILLANCE BY REMOTE MEANS. |
| TENDENCY TO A COLLABORATIVE ENVIRONMENT. INCLUDES TECHNOLOGY SHARING TRAINING. |

| |
|----------------------------------------------------------------------------------------------------------------|
| CNS /ATM TECHNOLOGY IN EVOLUTION. |
| |
| THREATS |
| SLOW RECOVERY INDUSTRY/AEROLINEAS (> 2024). REORGANIZATION OF THE AERONAUTICAL MARKET, COMPETITION BY MARKETS. |
| NEW OUTBREAK/PANDEMIA. |
| CHANGES IN THE PATTERN OF MOBILIZATION OF PEOPLE (TELECONFERENCES). LOSS OF USER CONFIDENCE. |
| ECONOMY SLOWED DOWN. CHANGE IN PUBLIC PRIORITIES IN STATES. DEFERMENT OF INVESTMENTS IN ANSP/AIRPORT/INDUSTRY. |
| POLITICAL SITUATIONS OF STATES. POSSIBLE LEGAL INSTABILITY. EXCESSIVE INTERVENTION. |
| ATTACKS ON CYBER SECURITY |

Appendix D - ASBU elements of operational thread

INTENDED PERFORMANCE IMPACT ON SPECIFIC KPAs AND KPIS

Remark: TBD means that the focus areas or specific KPI have not been defined.

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------------------------------------------------------|------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| ACAS-B1/1 ACAS Improvements | Safety | TBD | Improve mid-air collision avoidance (safety net) | TBD |
| APTA-B0/1 PBN Approaches (with basic capabilities) | Capacity | Capacity, throughput & utilization | Equip additional RWY ends with instrument approaches | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |
| APTA-B0/2 PBN SID and STAR procedures (with basic capabilities) | Capacity | Capacity, throughput & utilization | Increase airport arrival rate | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Mitigate local airspace capacity constraints if this is the problem | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Mitigate noise constraints if this is the problem | KPI10: Airport peak throughput |
| | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and approach procedure design) and semi-permanent (ATFCM measures) altitude constraints along the descent portion of traffic flows, in enroute and terminal airspace | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and departure procedure design) and semi-permanent (ATFCM measures) altitude constraints (level capping) along the climb portion of traffic flows, in terminal and en-route airspace | KPI17: Level-off during climb |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|---------------------------------------------------------------------------------------------------------------|------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| APTA-B0/3 SBAS/GBAS CAT I precision approach procedures | Capacity | Capacity, throughput & utilization | Equip additional RWY ends with instrument approaches | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |
| APTA-B0/4 CDO (Basic) | Efficiency | Vertical flight efficiency | Avoid efficiency penalties attributable to non-optimum ToD (descent starts before or after the optimum ToD) | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Avoid tactical lengthening of arrival path (eg vectoring, holding, trombone extension) because this leads to level flight | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Reduce descent inefficiency attributable to altitude constraints imposed by ATM | KPI19: Level-off during descent |
| APTA-B0/5 CCO (Basic) | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and departure procedure design) and semi-permanent (ATFCM measures) altitude constraints (level capping) along the climb portion of traffic flows, in terminal and en-route airspace | KPI17: Level-off during climb |
| APTA-B0/6 PBN Helicopter Point in Space (PinS) Operations | Capacity | Capacity, throughput & utilization | Mitigate local airspace capacity constraints if this is the problem | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |
| APTA-B0/7 Performance based aerodrome operating minima – Advanced aircraft | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------------------------------------------|------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| APTA-B0/8 Performance based aerodrome operating minima – Basic aircraft | Capacity | Capacity, throughput & utilization | Equip additional RWY ends with instrument approaches | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |
| APTA-B1/1 PBN Approaches (with advanced capabilities) | Capacity | Capacity, throughput & utilization | Equip additional RWY ends with instrument approaches | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |
| APTA-B1/2 PBN SID and STAR procedures (with advanced capabilities) | Capacity | Capacity, throughput & utilization | Increase airport arrival rate | KPI11: Airport throughput efficiency |
| | Capacity | Capacity, throughput & utilization | Mitigate local airspace capacity constraints if this is the problem | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Mitigate noise constraints if this is the problem | KPI10: Airport peak throughput |
| | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and approach procedure design) and semi-permanent (ATFCM measures) altitude constraints along the descent portion of traffic flows, in enroute and terminal airspace | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and departure procedure design) and semi-permanent (ATFCM measures) altitude constraints (level capping) along the climb portion of traffic flows, in terminal and en-route airspace | KPI17: Level-off during climb |
| APTA-B1/3 Performance based aerodrome operating | Capacity | Capacity, throughput & utilization | Reduce approach minima (ceiling & visibility) | KPI10: Airport peak throughput |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|---------------------------------------------------------------------------------------|------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| minima – Advanced aircraft with SVGS | | | | |
| APTA-B1/4 CDO (Advanced) | Efficiency | Vertical flight efficiency | Avoid efficiency penalties attributable to non-optimum ToD (descent starts before or after the optimum ToD) | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Avoid tactical lengthening of arrival path (eg vectoring, holding, trombone extension) because this leads to level flight | KPI19: Level-off during descent |
| | Efficiency | Vertical flight efficiency | Reduce descent inefficiency attributable to altitude constraints imposed by ATM | KPI19: Level-off during descent |
| APTA-B1/5 CCO (Advanced) | Efficiency | Vertical flight efficiency | Reduce permanent (airspace and departure procedure design) and semi-permanent (ATFCM measures) altitude constraints (level capping) along the climb portion of traffic flows, in terminal and en-route airspace | KPI17: Level-off during climb |
| CSEP-B1/1 Basic airborne situational awareness during flight operations (AIRB) | Safety | TBD | Improve mid-air collision avoidance (safety net) | TBD |
| | Safety | TBD | Improve separation provision (at a planning horizon > 2 minutes) | TBD |
| CSEP-B1/2 Visual Separation on Approach (VSA) | Safety | TBD | Improve separation provision (at a planning horizon > 2 minutes) | TBD |
| CSEP-B1/3 Performance Based Longitudinal | Capacity | Capacity, throughput & utilization | Improve what's needed to reduce longitudinal separation minima | KPI06: En-route airspace capacity |
| | Capacity | Capacity, throughput & utilization | Take advantage of increased navigation precision (airspace with PBN operations) to implement | KPI06: En-route airspace capacity |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------------------------------------------------|-------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Separation Minima | | | route networks and airspace structures with smaller lateral and vertical safety buffers | |
| CSEP-B1/4 | Capacity | Capacity, throughput & utilization | Improve what's needed to reduce lateral separation minima | KPI06: En-route airspace capacity |
| FRTO-B0/1 Direct routing (DCT) | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route network design | KPI04: Filed flight plan en-route extension |
| FRTO-B0/2 Airspace planning and Flexible Use of Airspace (FUA) | Access and equity | TBD | Improve airspace reservation management | TBD |
| | Efficiency | Flight time & distance | Facilitate direct routing of portions of the flight (if this does not cause network problems) | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route & airspace availability as known at the flight planning stage | KPI04: Filed flight plan en-route extension |
| | Efficiency | Flight time & distance | Reduce need for tactical ATFM rerouting to circumnavigate airspace closed at short notice | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Reduce need to avoid airspace because of lack of confirmation that it will be open | KPI04: Filed flight plan en-route extension |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during climb to avoid Special Use Airspace | KPI17: Level-off during climb |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during cruise to avoid Special Use Airspace | KPI18: Level capping during cruise |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during cruise to avoid Special Use Airspace | KPI19: Level-off during descent |
| FRTO-B0/3 Pre-validated and coordinated ATS routes to support flight and flow | Capacity | Capacity shortfall & associated delay | Establish/update/publish the catalogue of strategic ATFM measures designed to respond to a variety of possible/typical/recurring events degrading the airspace system (e.g. predefined action plans) | TBD |
| | Flexibility | TBD | Improve flexibility of the Air Navigation System | TBD |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------------------------------------------------------------------|-------------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| FRTO-B0/4 Basic conflict detection and conformance monitoring | Capacity | Capacity, throughput & utilization | Reduce ATCO workload (enroute) | KPI06: En-route airspace capacity |
| | Safety | TBD | Improve early detection of conflicting ATC Clearances (CATC) (en-route / departure / approach) | TBD |
| | Safety | TBD | Improve separation provision (at a planning horizon > 2 minutes) | TBD |
| | Safety | TBD | Reduce number of vertical & lateral navigation errors during flight (cases of non-conformance with clearance) | TBD |
| FRTO-B1/1 Free Route Airspace (FRA) | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route network design | KPI04: Filed flight plan en-route extension |
| FRTO-B1/2 Required Navigation Performance (RNP) routes | Capacity | Capacity, throughput & utilization | Overcome capacity limitations attributable to route network design | KPI06: En-route airspace capacity |
| | Capacity | Capacity, throughput & utilization | Take advantage of increased navigation precision (airspace with PBN operations) to implement route networks and airspace structures with smaller lateral and vertical safety buffers | KPI06: En-route airspace capacity |
| FRTO-B1/3 Advanced Flexible Use of Airspace (FUA) and management of real time airspace data | Access and equity | TBD | Improve airspace reservation management | TBD |
| | Efficiency | Flight time & distance | Facilitate direct routing of portions of the flight (if this does not cause network problems) | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route & airspace availability as known at the flight planning stage | KPI04: Filed flight plan en-route extension |
| | Efficiency | Flight time & distance | Reduce need for tactical ATFM rerouting to circumnavigate airspace closed at short notice | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Reduce need to avoid airspace because of lack of confirmation that it will be open | KPI04: Filed flight plan en-route extension |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during climb to avoid Special Use Airspace | KPI17: Level-off during climb |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during cruise to avoid Special Use Airspace | KPI18: Level capping during cruise |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during cruise to avoid Special Use Airspace | KPI19: Level-off during descent |
| FRTO-B1/4 Dynamic sectorization | Capacity | throughput & utilization | Improve flexibility of sector configuration management | TBD |
| | Capacity | throughput & utilization | Improve flexibility to modify sector configuration at short notice to cope with traffic pattern variations | TBD |
| FRTO-B1/5 Enhanced Conflict Detection Tools and Conformance Monitoring | Safety | TBD | Improve early detection of conflicting ATC Clearances (CATC) (en-route / departure / approach) | TBD |
| | Safety | TBD | Reduce number of vertical & lateral navigation errors during flight (cases of non-conformance with clearance) | TBD |
| FRTO-B1/6 Multi-Sector Planning | Cost effectiveness | TBD | Reduce costs in the Air Navigation System | TBD |
| NOPS-B0/1 Initial integration of collaborative airspace management with air traffic | Efficiency | Flight time & distance | Facilitate tactical decisions leading to a shorter actual route than in the FPL | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route & airspace availability as known at the flight planning stage | KPI04: Filed flight plan en-route extension |
| | Efficiency | Flight time & distance | Reduce need for tactical ATFM rerouting to circumnavigate airspace closed at short notice | KPI05: Actual enroute extension |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|-------------------------------------------------------------------------|------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| flow management | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during climb introduced to avoid airspace above | KPI17: Level-off during climb |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during cruise introduced to avoid airspace above | KPI18: Level capping during cruise |
| | Efficiency | Vertical flight efficiency | Reduce altitude restrictions during descent to avoid Special Use Airspace | KPI19: Level-off during descent |
| NOPS-B0/2 Collaborative Network Flight Updates | Capacity | Capacity shortfall & associated delay | Ensure that the measures applied are absolutely necessary and that unnecessary measures are avoided | TBD |
| | Capacity | Capacity shortfall & associated delay | Establish/improve the capability to use opportunities to mitigate disturbances, originating from: More precise surveillance data | TBD |
| NOPS-B0/4 Initial Airport/ATFM slots and A-CDM Network Interface | Capacity | Capacity shortfall & associated delay | For a given airspace entry slot: let airspace users swap the slot to another flight (slot substitution or UDPP – User Driven Prioritisation Process) | TBD |
| NOPS-B0/5 Dynamic ATFM slot allocation | Capacity | Capacity shortfall & associated delay | Implement TMIs to delay take-off times | KPI07: En-route ATFM delay |
| | Capacity | Capacity shortfall & associated delay | Use ATFM oriented flow management: delay push-back of inbound traffic | TBD |
| NOPS-B1/1 Short Term ATFM measures | Capacity | Capacity shortfall & associated delay | Establish/improve the capability to use opportunities to mitigate disturbances | TBD |
| | Capacity | Capacity shortfall & associated delay | TMI-based optimisation (only impacts traffic when a TMI or restriction is manually activated for one or more constraint satisfaction points) | TBD |
| NOPS-B1/10 Collaborative Trajectory Options Program (CTOP) | Capacity | Capacity shortfall & associated delay | For a given flight: at flight plan filing time airspace users provide network management with a range of trajectory options and associated trade-off criteria, from which one solution is chosen (CTOP – Collaborative Trajectory Options Program) | KPI04: Filed flight plan en-route extension |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|-------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| | Capacity | Capacity shortfall & associated delay | For a given flight: at flight plan filing time airspace users provide network management with a range of trajectory options and associated trade-off criteria, from which one solution is chosen (CTOP – Collaborative Trajectory Options Program) | KPI07: En-route ATFM delay |
| | Capacity | Capacity shortfall & associated delay | For a given flight: at flight plan filing time airspace users provide network management with a range of trajectory options and associated trade-off criteria, from which one solution is chosen (CTOP – Collaborative Trajectory Options Program) | KPI18: Level capping during cruise |
| NOPS-B1/2 Enhanced Network Operations Planning | Capacity | Capacity shortfall & associated delay | Establish/update the crisis management capabilities and plans (to cope with the risk of large scale disruptions) | TBD |
| NOPS-B1/4 Dynamic Traffic Complexity Management | Capacity | Capacity, throughput & utilization | Overcome operational ATC service delivery limitations if these are the blocking factor | KPI06: En-route airspace capacity |
| NOPS-B1/5 Full integration of airspace management with air traffic flow management | Efficiency | Flight time & distance | Facilitate tactical decisions leading to a shorter actual route than in the FPL | KPI05: Actual enroute extension |
| | Efficiency | Flight time & distance | Overcome route selection inefficiencies associated with route & airspace availability as known at the flight planning stage | KPI04: Filed flight plan en-route extension |
| | Efficiency | Flight time & distance | Reduce need for tactical ATFM rerouting to circumnavigate airspace closed at short notice | KPI05: Actual enroute extension |
| | Efficiency | Efficiency Vertical flight efficiency | Reduce altitude restrictions during climb introduced to avoid airspace above | KPI17: Level-off during climb |
| | Efficiency | Efficiency Vertical flight efficiency | Reduce altitude restrictions during cruise introduced to avoid airspace above | KPI18: Level capping during cruise |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|------------------------------------------------------------------------|--------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| | Efficiency | Efficiency Vertical flight efficiency | Reduce altitude restrictions during descent to avoid Special Use Airspace | KPI19: Level-off during descent |
| NOPS-B1/6 Initial Dynamic Airspace configurations | Capacity | Capacity shortfall & associated delay | Establish/update/publish the catalogue of strategic ATFM measures designed to respond to a variety of possible/typical/recurring events degrading the airspace system (e.g. predefined action plans) | TBD |
| NOPS-B1/7 Enhanced ATFM slot swapping | Capacity | Capacity shortfall & associated delay | For a given airspace entry slot: let airspace users swap the slot to another flight (slot substitution or UDPP – User Driven Prioritisation Process) | TBD |
| NOPS-B1/9 Target Times for ATFM purposes | Capacity | Capacity shortfall & associated delay | TMI-based optimisation (only impacts traffic when a TMI or restriction is manually activated for one or more constraint satisfaction points) | TBD |
| | Capacity | Capacity, throughput & utilization | Optimise en-route airspace capacity | TBD |
| OPFL-B0/1 In Trail Procedure (ITP) OPFL-B1/1 Climb and Descend) | Efficiency | Vertical flight efficiency | Increase acceptance of pilot requests for higher cruise level | KPI18: Level capping during cruise |
| | Efficiency | Vertical flight efficiency | Efficiency Reduce level restrictions during cruise issued by ATCOs for conflict resolution purposes | KPI18: Level capping during cruise |
| OPFL-B1/1 Climb and Descend Procedure (CDP) | Efficiency | Vertical flight efficiency | Increase acceptance of pilot requests for higher cruise level | KPI18: Level capping during cruise |
| | Efficiency | Vertical flight efficiency | Reduce level restrictions during cruise issued by ATCOs for conflict resolution purposes | KPI18: Level capping during cruise |
| RATS-B1/1 Remotely Operated | Cost effectiveness | TBD | Reduce costs in the Air Navigation System | TBD |
| | Flexibility | TBD | Improve flexibility of the Air Navigation System | TBD |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|--------------------------------------------|------------|---------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Aerodrome Air Traffic Services | Safety | TBD | Maintain or improve safety during surface movement | TBD |
| | Safety | TBD | Maintain or improve safety on the runway | TBD |
| RSEQ-B0/1 Arrival Management | Capacity | Capacity, throughput & utilization | Apply arrival balancing | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Apply smart sequencing to harmonise final approach speeds (arrival) | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Apply smart sequencing to optimise wake vortex separations (arrival) | KPI10: Airport peak throughput |
| | Capacity | Capacity, throughput & utilization | Improve arrival sequencing and metering to fill all arrival slots | KPI11: Airport throughput efficiency |
| | Efficiency | Flight time & distance | Apply TTA and en-route speed reduction if traffic is already airborne | KPI08: Additional time in terminal airspace |
| | Efficiency | Flight time & distance | Reduce need to fine-tune traffic spacing in terminal airspace (arrival) | KPI08: Additional time in terminal airspace |
| RSEQ-B0/2 Departure Management | Capacity | Capacity, throughput & utilization | Maintain or improve departure rate of the RWY | KPI10: Airport peak throughput |
| | Efficiency | Efficiency Flight time & distance | Avoid additional holding time after line up caused by departure metering not factored in during pushback planning | KPI02: Taxi-out additional time |
| | Efficiency | Efficiency Flight time & distance | Improve the delivery of departing traffic into the overhead stream | KPI02: Taxi-out additional time |
| RSEQ-B0/3 Point merge | Capacity | Capacity, throughput & utilization | Apply merging & synchronisation of arrival flows | KPI10: Airport peak throughput |
| RSEQ-B1/1 Extended arrival metering | Capacity | Capacity shortfall & associated delay | Apply (unplanned) airborne holding to inbound traffic | TBD |
| | Capacity | Capacity shortfall & associated delay | Delay take-off of inbound traffic (sequencing & metering measures) | TBD |
| | Capacity | Capacity shortfall & associated delay | Slow down inbound traffic during en-route | TBD |
| | Efficiency | Flight time & distance | Extend arrival management to a greater radius around the destination airport | KPI08: Additional time in terminal airspace |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|-------------------------------------------------------------------------|------------|------------------------|--------------------------------------------------------------------------|---------------------------------|
| SNET-B0/1 Short Term Conflict Alert (STCA) | Safety | TBD | Improve mid-air collision avoidance (safety net) | TBD |
| SNET-B0/2 Minimum Safe Altitude Warning (MSAW) | Safety | TBD | Reduce controlled flight into terrain (CFIT) and obstacle collision risk | TBD |
| SNET-B0/3 Area Proximity Warning (APW) | Safety | TBD | Reduce unauthorized penetration of airspace risk | TBD |
| SNET-B0/4 Approach Path Monitoring (APM) | Safety | TBD | Reduce controlled flight into terrain (CFIT) and obstacle collision risk | TBD |
| SNET-B1/1 Enhanced STCA with aircraft parameters | Safety | TBD | Improve mid-air collision avoidance (safety net) | TBD |
| SNET-B1/2 Enhanced STCA with aircraft parameters | Safety | TBD | improve mid-air collision avoidance (safety net) | TBD |
| SURF-B0/1 Basic ATCO tools to manage traffic during | Efficiency | Flight time & distance | Avoid taxi-in additional time resulting from adverse conditions | KPI13: Taxi-in additional time |
| | Efficiency | Flight time & distance | Avoid taxi-out additional time resulting from adverse conditions | KPI02: Taxi-out additional time |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|-------------------------------------------------------------------------------------------------------------|------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| ground operations | Safety | TBD | Avoid incorrect entries of aircraft or vehicles onto the runway protected area (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Avoid incorrect runway crossings by aircraft or vehicles (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Reduce number of taxi errors (cases of non-conformance with clearance) | TBD |
| SURF-B0/2 Comprehensive situational awareness of surface operations | Safety | TBD | Avoid incorrect entries of aircraft or vehicles onto the runway protected area (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Avoid incorrect presence of vacating aircraft or vehicles onto the runway protected area) | TBD |
| | Safety | TBD | Avoid incorrect runway crossings by aircraft or vehicles (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Improve collision avoidance during taxi operations (safety net) | TBD |
| SURF-B0/3 Initial ATCO alerting service for surface operations | Safety | TBD | Improve runway collision avoidance (safety net) | TBD |
| SURF-B1/1 Advanced features using visual aids to support traffic management during ground operations | Efficiency | Flight time & distance | Avoid taxi-in additional time resulting from adverse conditions | KPI13: Taxi-in additional time |
| | Efficiency | Flight time & distance | Avoid taxi-out additional time resulting from adverse conditions | KPI02: Taxi-out additional time |
| | Safety | TBD | Improve collision avoidance during taxi operations (safety net) | TBD |
| | Safety | TBD | Reduce number of taxi errors (cases of non-conformance with clearance) | TBD |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|---------------------------------------------------------------------------------------|------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| SURF-B1/2 Comprehensive pilot situational awareness on the airport surface | Safety | TBD | Avoid incorrect entries of aircraft or vehicles onto the runway protected area (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Avoid incorrect presence of vacating aircraft or vehicles onto the runway protected area) | TBD |
| | Safety | TBD | Avoid incorrect runway crossings by aircraft or vehicles (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Improve collision avoidance during taxi operations (safety net) | TBD |
| SURF-B1/3 Enhanced ATCO alerting service for surface operations | Safety | TBD | Improve early detection of conflicting ATC Clearances (CATC) related to runway usage | TBD |
| | Safety | TBD | Improve early detection of conflicting ATC Clearances (CATC) related to taxi operations | TBD |
| SURF-B1/4 Routing service to support ATCO surface operations management | Efficiency | Efficiency Flight time & distance | Avoid taxi-in additional time resulting from adverse conditions | KPI13: Taxi-in additional time B |
| | Efficiency | Efficiency Flight time & distance | Avoid taxi-out additional time resulting from adverse conditions | KPI02: Taxi-out additional time |
| | Efficiency | Efficiency Flight time & distance | Introduce 4D planning of taxi-in surface movements | KPI13: Taxi-in additional time |
| | Efficiency | Efficiency Flight time & distance | Introduce 4D planning of taxi-out surface movements | KPI02: Taxi-out additional time |
| SURF-B1/5 Enhanced vision systems for taxi operations | Efficiency | Flight time & distance | Avoid longer taxi-in due to taxi errors | KPI13: Taxi-in additional time |
| | Efficiency | Flight time & distance | Avoid longer taxi-out routes due to taxi errors | KPI02: Taxi-out additional time |
| | Efficiency | Flight time & distance | Avoid slow taxi-in due to ATC and/or pilot | KPI13: Taxi-in additional time |
| | Efficiency | Flight time & distance | Avoid slow taxi-out due to weather conditions | KPI13: Taxi-in additional time |

| ASBU Element | KPA | Focus Areas | Specific performance objective(s) supported | KPI |
|-------------------------------------------------------------------------------------------|------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| | Efficiency | Flight time & distance | Avoid slow taxi-out due to ATC and/or pilot | KPI02: Taxi-out additional time |
| | Efficiency | Flight time & distance | Avoid slow taxi-out due to weather conditions | KPI02: Taxi-out additional time |
| | Efficiency | Flight time & distance | Reduce ATC constraints during low visibility taxi-in | KPI13: Taxi-in additional time |
| | Efficiency | Flight time & distance | Reduce ATC constraints during low visibility taxi-out | KPI02: Taxi-out additional time |
| | Safety | TBD | Avoid incorrect entries of aircraft or vehicles onto the runway protected area (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Avoid incorrect presence of vacating aircraft or vehicles onto the runway protected area) | TBD |
| | Safety | TBD | Avoid incorrect runway crossings by aircraft or vehicles (without or contrary to ATC clearance or due to incorrect ATC clearance) | TBD |
| | Safety | TBD | Improve early detection of conflicting ATC Clearances (CATC) related to taxi operations | TBD |
| | Safety | TBD | Reduce number of taxi errors (cases of non-conformance with clearance) | TBD |
| TBO-B0/1 Introduction of time-based management within a flow centric approach. | Capacity | Capacity shortfall & associated delay | Mitigate demand/capacity imbalance at airports and/or associated terminal airspace | TBD |
| | Capacity | Capacity shortfall & associated delay | Mitigate demand/capacity imbalance in en-route airspace | TBD |
| TBO-B1/1 Initial Integration of time-based decision | Capacity | Capacity shortfall & associated delay | Mitigate demand/capacity imbalance at airports and/or associated terminal airspace | TBD |
| | Capacity | Capacity shortfall & associated delay | Mitigate demand/capacity imbalance in en-route airspace | TBD |

ATTACHMENT

***TEMPLATE APPROVED BY THE COUNCIL
on 18 June 2014***

(NAME) AIR NAVIGATION PLAN

VOLUME III

(NAME) AIR NAVIGATION PLAN

VOLUME III

TABLE OF CONTENTS

PART 0 — Introduction

PART I — General Planning Aspects (GEN).....

PART II – Performance Management Planning and ANS Implementation (PMP)

 Table PMP III-1 – Strengths, weakness, opportunities and threads in the (NAME) Region

 Table PMP III-2 – List of performance objectives by KPA for the (NAME) Region

 Table PMP III-3 – List of KPIs by performance objective and KPA for the (NAME) Region

 Table PMP III-4 – Performance baseline within the (NAME) Region

 Table PMP III-5 – Performance targets and needs within the (NAME) Region

 Table PMP III-6 – Selected ASBU Elements / Operational Improvements for the (NAME) Region

 Table PMP III-7 – Status of deployment of the selected operational improvements of the ASBU elements / Operational Improvements for the (NAME) Region

 Table PMP III-8 – Performance benefits accrued form the implementation of the selected ASBU elements / Operational Improvements for the (NAME) Region

 Table PMP III- (NAME Region) - 1 – List of CTA/TMA in the (NAME) Region

(NAME) ANP, VOLUME III
PART 0 – INTRODUCTION

1. INTRODUCTION

1.1 The background to the publication of ANPs in three volumes is explained in the Introduction in Volume I. The procedure for amendment of Volume III is also described in Volume I. Volume III contains dynamic/flexible plan elements related to the application of a performance-based approach for a cost-effective and benefit-driven modernization of the air navigation system in line with the Global Air Navigation Plan (GANP).

1.2 Collaborative decision-making is key for a cost-effective modernization of the air navigation system and ensures that all concerned aviation stakeholders are involved and given the opportunity to influence decisions in order to reach defined performance objectives. Volume III guides the aviation community in the application of performance management process and identification of relevant and timely operational improvements to a given region's air navigation system including some within the Aviation System Block Upgrade (ASBU) framework.

1.3 The information contained in Volume III is, therefore, related to:

- Planning: objectives, priorities, targets and needs planned at regional or sub-regional levels;
- Monitoring and reporting: performance and implementation monitoring of the agreed targets. This information should be used as the basis for reporting purposes (i.e.: global and regional air navigation reports and performance dashboards); and/or
- Guidance: providing regional guidance material for the implementation of specific system/procedures in a harmonized manner.

1.4 [**name of PIRG**] is responsible for managing and updating Volume III on a regular basis.

(NAME) ANP, VOLUME III

PART I - GENERAL PLANNING ASPECTS (GEN)

1. PLANNING METHOD

1.1 A performance-based approach is results-oriented, helping decision makers set priorities and determine appropriate trade-offs that support optimum resource allocation while maintaining an acceptable level of safety performance and promoting transparency and accountability among stakeholders.

1.2 The Thirteenth Air Navigation Conference recommended the ICAO encourage the planning and implementation regional groups (PIRGs) to embrace a performance-based approach for implementation and adopt the six-step performance management process, as described in the Manual on Global Performance of the Air Navigation System (Doc 9883), by reflecting the process in Volume III of all regional air navigation plans. Recommendation 4.3/1 — Improving the performance of the air navigation system refers.

1.3 Although there are several ways to apply a performance-based approach, ICAO advocates for a globally harmonized performance management process based on six well-defined steps. The goal of this cyclic six-steps method is to identify optimum solutions based on operational requirements and performance needs so that the expectations of the aviation community can be met by enhancing the performance of the air navigation system and optimizing allocation and use of the available resources.

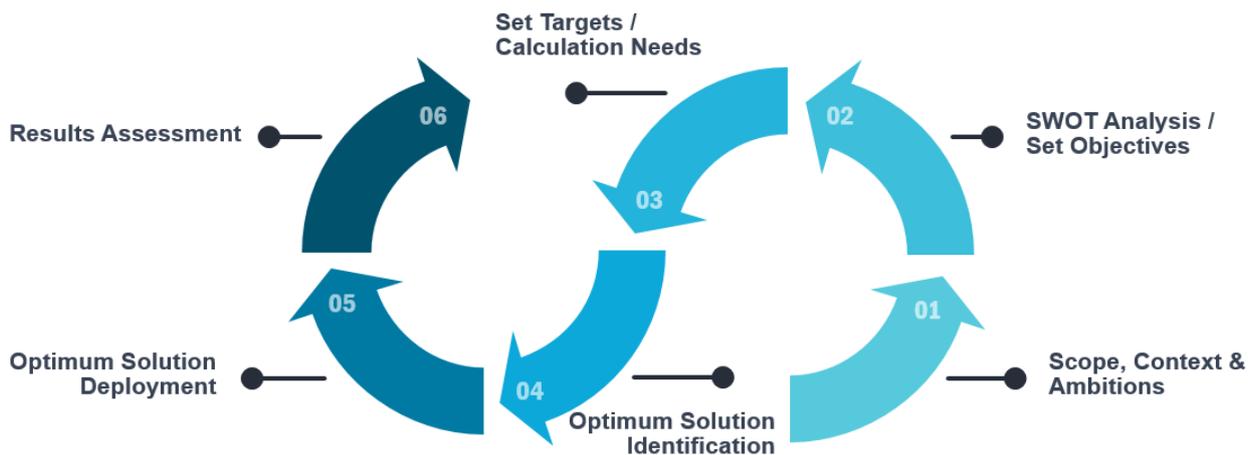


Figure 1 Six-step performance management process

1.4 Steps 1 and 2 serve to know your system, its strengths, weakness, opportunities and threats as well as how it is performing in order to set objectives. The catalogue of performance objectives that is part of the GANP global performance framework facilitates the definition of objectives.

1.5 Based on these objectives, targets can be set in step 3. An analysis of this data leads to the identification of potential solutions, in step 4, to achieve the targets by addressing the weakness and threats of the system. Once a set of potential solutions have been identified, a cost-benefits analysis, environmental impact assessment, safety assessment and human factor assessment should be performed to identify the optimum solution. In the GANP performance framework, a list of KPIs, linked to the relevant objectives in the performance objectives catalogue, is provided to set targets through the quantification of objectives. A list of potential solutions to be consider as part of step 4 is the ASBU framework with its functional description of the operational improvements and their associated performance benefits.

1.6 Step 5 manages a coordinated deployment of the agreed solution by all stakeholders based on the previous steps. Regional plans might need to be developed for the deployment of solutions by drawing on supporting technology requirements.

1.7 Finally, step 6 consists of monitoring and reporting the performance of the system after the full deployment of the solution.

1.8 This is an iterative planning process, which may require repeating several steps until a final plan with specific regional targets is in place. This planning method requires full involvement of States, service providers, airspace users and other stakeholders, thus ensuring commitment by all for implementation.

Review and evaluation of air navigation planning

2.1. The progress and effectiveness against the priorities set out in the regional air navigation plans should be annually reported, using a consistent reporting format, to ICAO.

2.2. Performance monitoring requires a measurement strategy. Data collection, processing, storage and reporting activities supporting the identified global/regional performance metrics are fundamental to the success of performance-based approaches.

2.3. The air navigation planning and implementation performance framework prescribes reporting, monitoring, analysis and review activities being conducted on a cyclical, annual basis.

Reporting and monitoring results

2.4. Reporting and monitoring results will be analyzed by the PIRGs, States and ICAO Secretariat to steer the air navigation improvements, take corrective actions and review the allocated objectives, priorities and targets if needed. The results will also be used by ICAO and aviation partner stakeholders to develop the annual Global Air Navigation Report. The report results will provide an opportunity for the international civil aviation community to compare progress across different ICAO regions in the establishment of air navigation infrastructure and performance-based procedures.

2.5. The reports will also provide the ICAO Council with detailed annual results on the quality of service provided worldwide as well as the performance areas which require more attention. This will serve as input for the triennial policy adjustments to the GANP and its priorities.

(NAME) ANP, VOLUME III

PART II – PERFORMANCE MANAGEMENT PLANNING AND ANS IMPLEMENTATION (PMP)

1. STEP 1: DEFINE SCOPE, CONTEXT AND SET AMBITIONS

General

1.1 The purpose of Step 1 is to reach a common agreement on the scope and (assumed) context of the regional air navigation system on which the performance management process will be applied, as well as a common view on the general nature of the expected performance improvements.

Geographical scope

1.2 The geographical scope is defined in Volume I and in particular in the following tables:

- Table GEN I-1 — List of Flight Information Regions (FIR)/Upper Information Regions (UIR) in the Region
- Table ATM I-1 — Flight Information Regions (FIR)/Upper Flight Information Regions (UIR) of the Region
- Table SAR I-1 — Search and Rescue Regions (SRR) of the Region
- Table AOP I-1 — International aerodromes required in the Region
- Table PMP III (NAME Region) - 1 – List of CTA/TMA in the Region (Optional. Please note that, if it is decided that this level of granularity is required in the Region, the rest of the performance management process will be applied at this level of granularity for consistency purposes. If this table is not developed, the PMP will be applied at an FIR level)

Homogeneous areas and/or major traffic flows

1.3 The homogeneous ATM areas and major traffic flows/routing areas identified are given in:

- Table GEN II-1 — Homogeneous areas and major traffic flows identified in the Region

Time Horizon

1.4 Volume III of the (NAME) ANP provides short- (years) and medium- (years) term implementation planning.

Traffic forecast

1.5 A uniform strategy has been adopted by ICAO for the purpose of preparing traffic forecasts and other planning parameters in support of the regional planning process.

- (include traffic forecast for the Region from ATB)

1.6 In the (NAME) Region, in addition to the ICAO forecast, the following forecast from (source) is used for planning purposes. (if applicable)

Political (high level) ambitions

1.7 The expectations of the global aviation community are defined in 11 Key Performance Areas (KPA's). The GANP considers all these areas through the performance ambitions. Although all these areas are equally important, as they are interrelated and cannot be considered in isolation, some areas are more visible to society than others.

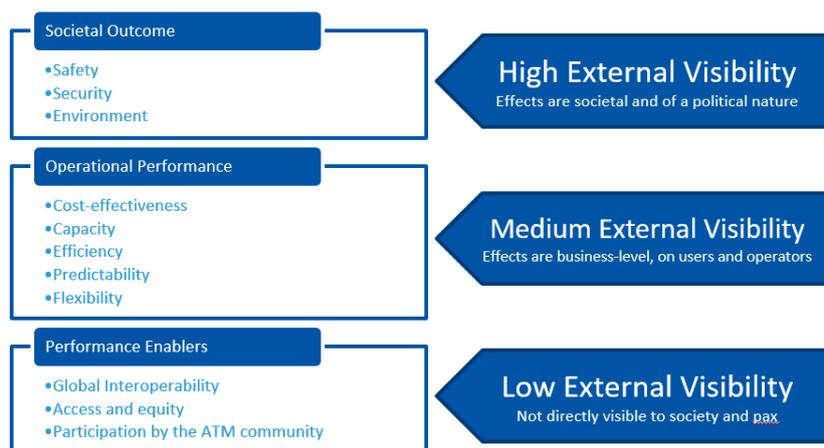


Figure 2 The 11 KPAs of the GANP

1.8 The regional air navigation plan public's perception of safe air travel is key to the prosperity of the aviation sector, which is why, safety is critical when planning the implementation of air navigation operational improvements. To determine if these improvements can be implemented in a safe manner, a safety risk assessment provides information to identify hazards that may arise from, for example:

- a) any planned modifications in airspace usage;
- b) the introduction of new technologies or procedures; or
- c) the decommissioning of older navigational aids.

1.9 A safety risk assessment also enables the assessment of potential consequences. Based on the results of a safety risk assessment, mitigation strategies may be implemented to ensure that an acceptable level of safety performance is maintained. Any operational improvement should be implemented only on the basis of a documented safety risk assessment.

1.10 Fatalities resulting from acts of unlawful interference also affect the public's perception of aviation safety. The cumulative improvements to aviation security globally enhance the safety, facilitation and operational aspects of the international civil aviation system.

1.11 Some safety and environment considerations can be found in Volume I.

1.12 After political consultation the following set of performance ambitions have been prioritized within the (NAME) Region, (DECLARATION) refers.

- (include the set of ambitions in a set of KPAs)

2. STEP 2: KNOW YOUR SYSTEM – SWOT ANALYSIS AND REGIONAL OBJECTIVES

General

2.1 The purpose of Step 2 is to develop a detailed understanding of the performance behaviour of the system (this includes producing a list of opportunities and issues), and to decide which specific performance aspects are essential for meeting the general expectations. The essential performance aspects are those which need to be actively managed (and perhaps improved) by setting performance objectives.

SWOT analysis

2.2 A SWOT analysis allows the development of an inventory of present and future opportunities and issues (weaknesses, threats) that may require performance management attention.

2.3 A SWOT analysis, requires the identification of:

- Strengths: internal attributes of a system or an organization that can help in the realization of ambitions or in meeting expectations.

[Type text]

- Weaknesses: internal attributes of a system or an organization that are a detriment to realizing ambitions or meeting expectations.
- Opportunities: are external conditions that help in the realization of ambitions or in meeting expectations.
- Threats: external conditions that are a detriment or harmful to realizing ambitions or meeting expectations.

2.4 Once the strengths, weakness, opportunities and threats are identified, action can be taken to target and exploit or remove these factors. The SWOTs in the (NAME) Region can be found in **Table PMP III-1**.

Regional objectives

2.5 The performance framework of the GANP includes a catalogue of performance objectives to facilitate the definition of objectives. Considering the objectives defined in the catalogue and based on the SWOT analysis, the (NAME) Region defines, within in the key performance areas prioritize in step 1, the objectives within **Table PMP III-2** to be pursued by the States within the Region.

3. STEP 3: QUANTIFY OBJECTIVES, SET TARGETS AND CALCULATE NEEDS

General

3.1 The purpose of Step 3 is to ensure that objectives are specific, measurable, achievable, relevant and time-bound (SMART) so that targets can be set and needs calculated.

List of regional indicators

3.2 The way to ensure that objectives are specific and measurable is by defining indicators. Indicators are the means to quantitatively express performance as well as actual progress in achieving performance objectives. Indicators need to be defined carefully:

- Since indicators support objectives, they should not be defined without having a specific performance objective in mind.
- Indicators are not often directly measures. They are calculated from supporting metrics according to clearly defined formulas. This leads to a requirement for cost data collection and flight data collection. If there is a problem with data availability to calculate these supporting metrics:
 - Set up the appropriate data reporting flows and/ or modelling activities, to ensure all supporting metrics are populated with data as required to calculate the indicator(s) associated with the objective; or
 - If this is not possible, aim for a different kind of performance improvement, by choosing a different performance objective, as constrained by data availability.

— Specific } PERFORMANCE
— Measurable } INDICATORS → ICAO KPIs Catalogue
— Achievable
— Relevant
— Time-bounded

3.3 In order to facilitate this task, ICAO has defined a series of KPIs link to the catalogue of performance objectives within the 11KPA. The ICAO KPIs associated to the performance objectives in the (NAME) Region are in **Table PMP III- 3**.

Performance baseline in the (NAME) Region

[Type text]

3.4 The only way of knowing an operational environment and identifying the existence of a problem is by collecting, processing and analysing data. The value of these indicators would be your performance baseline. The performance baseline for the (NAME) Region can be found in **Table PMP III-4**.

Regional targets and calculation of needs

3.5 Performance targets are closely associated with performance indicators, they represent the values of performance indicators that need to be reached or exceeded to consider a performance objective as being fully achieved.

3.6 To understand how challenging it is to reach your target, you should know your performance baseline. The difference between the baseline and the target is called the needs/performance gap.

3.7 The time available to achieve performance objectives is always limited. Therefore, targets should always be time-bounded.

3.8 The target and the time available to reach the target determine the required speed of progress for the performance objective. Care should be taken to set target so that the required speed of progress is realistic.

3.9 Based on the information submitted and after consideration by all stakeholders, the targets and needs in **Table PMP III-5** have been agreed for the (NAME) Region.



4. STEP 4: SELECT SOLUTIONS

General

4.1 The purpose of this step is to combine the knowledge of baseline performance, opportunities and issues with the performance objectives and targets, in order to make decisions in terms of priorities, trade-offs, selection of solutions and resource allocation. The aim is to optimize the decisions to maximize the achievement of the desired/required (performance) results.

Select solutions

4.2 Based on the agreed targets, States should perform a SWOT analysis at each operational environment to develop an inventory of present and future opportunities and issues that may require attention. The list then needs to be analyzed in a performance oriented way, to assess/ quantify the impact of drivers, constraints, impediments, etc. on the objectives under consideration. To what extent, when and under which conditions do these contribute to or prevent the required performance improvements.

4.3 States should consider the operational improvements (ASBU elements) within the ASBU framework as potential solutions to improve the selected objectives/KPIs in the operational environment under analysis. In order to help States with this task, ICAO has developed the Air Navigation System Performance Analysis (AN-SPA) tool, available for free at: <https://www4.icao.int/ganpportal/ANSPA/Reports>

4.4 Please note that the ASBUs are a list of potential solutions and therefore it might happen that the optimum solution for the operational environment under analysis is not within this list.

4.5 Once a list of potential solutions has been developed, it is important to do a safety assessment and an environmental impact assessment to analyze the feasibility of implementing that specific solution in

[Type text]

the operational environment under analysis. ICAO has developed the following guidance to assist States to perform a safety assessment and an environmental impact assessment:

4.5.1 Safety assessment:

4.5.1.1 The 4th edition of the Safety Management Manual (SMM), was updated and published in October 2018 to provide supporting guidance for Amendment 1 to Annex 19 – Safety Management, including:

- Upgraded provisions for the protection of safety data, safety information and related sources;
- Integration of the 8 critical elements into the State Safety Programme (SSP) components; and
- Enhanced provisions for Safety Management System (SMS).

4.5.1.2 It also provides expanded guidance on the scope of Annex 19 its applicability, including discretionary SMS applicability, as well as the development of safety intelligence. In addition, to address the needs of the diverse aviation community implementing safety management and following a recommendation stemming from the 2nd High-level Safety Conference (HLSC/2015), the Safety Management Implementation (SMI) public website (www.icao.int/SMI) has been launched to complement the SMM. The SMI website serves as a repository for the sharing of practical examples, tools and educational material, which are being collected, validated and posted on an ongoing basis to support the effective implementation of SSP and SMS. An e-book version of the SMM in all ICAO languages is also available on the website.

4.5.2 Environmental impact assessment guidance:

4.5.2.1 This guidance identifies high-level principles that facilitate the robust definition and application of specific assessment approaches, methodologies and their respective metrics. The focus of these principles is on changes that relate to aircraft and ATM operational initiatives and may involve all phases of flight (e.g. Gate-to-Gate). The general principles of this guidance can be applicable to air navigation aspects arising from infrastructure proposals and major changes to airspace capacity or throughput, as well as operational changes. While the boundaries of an air navigation services environmental analysis are based on the needs of the study, for the purposes of this guidance material “air navigation services environmental assessment” is to be interpreted in the broadest possible sense and refers to impacts arising from changes to where, when, and how aircraft are operated.

https://store.icao.int/catalogsearch/result/?category_id=2&q=10031

4.5.2.2 Once the feasibility study has been done, we will still need to do a cost-benefit analysis to identify the optimum solution/s. ICAO has developed some guidance and a tool to assist you on this task:

4.5.3 Cost-benefit analysis:

<https://data.icao.int/cba>

4.5.3.1 Once the optimum solution(s) has(ve) been identified, States should report them to ICAO and they are reflected in **Table PMP III-6**.

5. STEP 5: IMPLEMENT SOLUTIONS

General

5.1 Step 5 is the execution phase of the performance management process. This is where the changes and improvements that were decided upon during the previous step are organized into detailed plans, implemented, and begin delivering benefits.

Select solutions

5.2 Once the optimum solution/s has/have been identified, it is the moment to start the execution phase of the performance management process. This is where the changes and improvements that you decided were the optimum solution for your problem during the previous steps are organized into plans, implemented

[Type text]

and begin delivering services to achieve the expected performance. During this execution phase, it is important to keep track of the project deployments (time, budget, ...).

5.3 Depending on the mature and magnitude of the change, this could mean:

- In the case of small-scale changes or day-to day management:
 - Assigning management responsibility for the implementation to an individual;
 - Assigning responsibility and accountability for reaching a performance target to an individual or organization
- In the case of major or multi-year changes:
 - Refining the roadmap of selected solutions into a detailed implementation plan, followed by the launching of implementation projects
 - Ensure that each individual implementation project is operated in accordance with the performance-based approach. This means launching and executing the performance management process at the level of individual projects. Each project derives its scope, context and expectations (see Step 1 of the process) from the overall implementation plan.

5.4 This can imply to overcome high-level political challenges, find funding and resources or look for external technical support.

5.5 In this step, States are expected to report on the status on the implementation by updating **Table PMP III-7**.

6. STEP 6: ASSESS ACHIEVEMENTS

General

6.1 The purpose of Step 6 is to continuously keep track of performance and monitor whether performance gaps are being closed as planned and expected.

Assess achievements

6.2 Once the project is implemented, it is time to assess the benefits from the implementation. This means measuring the performance of the operational environment under analysis once the solution/s has/have been deployed.

6.3 The purpose of this step is to continuously keep track of performance and monitor whether performance gaps are being closed as planned and expected.

6.4 First and foremost, this implies data collection to populate the supporting metrics with the data needed to calculate the performance indicators. The indicators are then compared with the targets defined during Step 3 to draw conclusions on the speed of progress in achieving the objectives.

6.5 This step also includes monitoring progress of the implementation projects, particularly in those cases where the implementation of solutions takes several years, as well as checking periodically whether all assumptions are still valid and the planned performance of the solutions is still meeting the (perhaps changed) requirements.

6.6 With regard to the review of actually achieved performance, the output of this step is simply an updated list of performance gaps and their causes. In practice, the scope of the activity is often interpreted as being much wider and includes recommendations to mitigate the gaps.

6.7 This is then called performance monitoring and review, which in addition to this step, includes step 1, 2 and 3.

6.8 For the purpose of organizing performance monitoring and review, the task can be broken down into five separate activities:

- Data collection

[Type text]

- Data publication
- Data analysis
- Formulation of conclusions; and
- Formulation of recommendations.

6.9 States should report on the benefits accrued from the implementation of the solutions in **Table PMP III-8**. This would constitute the baseline for the next iteration of the performance management process.

Table PMP III- (Region) - 1 – List of CTA/TMA in the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs by State within **Table ATM I-1**.
- 3 CTAs/TMAs
- 4 Remarks

| State | FIR | CTA/TMA | | Remarks |
|-------|-----|-----------|------|---------|
| | | Indicator | Name | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Table PMP III-1 – Strengths, weakness, opportunities and threads in the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 Strengths: internal attributes of a system or an organization that can help in the realization of ambitions or in meeting expectations.
- 2 Weaknesses: internal attributes of a system or an organization that are a detriment to realizing ambitions or meeting expectations.
- 3 Opportunities: are external conditions that help in the realization of ambitions or in meeting expectations.
- 4 Threats: external conditions that are a detriment or harmful to realizing ambitions or meeting expectations.
- 5 List of SWOTs
- 6 Remarks

| | List | Remarks |
|----------------------|------|---------|
| Strengths | | |
| Weakness | | |
| Opportunities | | |
| Threats | | |

Example for the CAR Region:

| | List | Remarks |
|------------------|-----------------------------------------------------------------------------|---------|
| Strengths | Reconocimiento político de la importancia de la aviación civil en la Región | |
| | Reconocimiento de liderazgo de la oficina Regional por parte de los Estados | |
| | Strong commitment from the RO to the States | |
| | Open skies policies | |
| | State of the art CNS infrastructure | |
| | Continuos investment ATM improvement | |
| | Buenos mecanismos de cohesión para la prestación del servicio de MET | |
| | Good trasition to digital aeronáutica information | |
| | Human factors considerations included | |
| Weakness | Different needs | |
| | Lack of technical skilled personnel | |
| | Infraestructura aeroportuaria saturada y non-compliance with the Standards | |
| | Lack of use of new CNS equipment | |
| | Lack of harmonization in ATM procedures and systems | |
| | Lack of MET instruments and equipment | |
| | Lack of attention of States to the establishment of SAR services | |

[Type text]

| | | |
|----------------------|---------------------------------------------------------------------------------------------|--|
| | Lack of validation of to ensure that an aeronautical information products have been checked | |
| | Lack of quality of the information | |
| | Unresolved air navigation deficiencies | |
| | ANS safety oversight not at the same level of the ANSP | |
| | 60.17 Regional ANS EI and 58.49 Regional AGA EI | |
| Opportunities | Tourism and economic growth | |
| | Continuos traffic growth | |
| | Access to funding (pool of donnors and partnerships) | |
| | Programas de asistencia disponibles | |
| | New technology available | |
| | Use of regional cooperation to address aviation challenges | |
| | Strategic geographical position of the Region | |
| Threats | Natural disasters | |
| | Political and social conflicts | |
| | Public Health events | |
| | Geografia insular and oversees territories | |
| | Lack of holistic approach to the national transport systems | |
| | Non-homogeneous traffic demand with peaks of traffic exceeding capacity | |
| | Lack of harmonization with regards to available assistant | |

Table PMP III-2 – List of performance objectives by KPA for the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 ICAO defined 11 Key Performance Areas. *Include the list of KPAs and its definition.*
- 2 Performance Objectives. These objectives have been selected from the catalogue of performance objectives.
- 3 Remarks

| KPA | Performance Objective | Remarks |
|------------|------------------------------|----------------|
| | | |
| | | |
| | | |
| | | |

Table PMP III-3 – List of KPIs by performance objective and KPA for the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 KPA's from **Table PMP III-2**.
- 2 Performance Objectives from **Table PMP III-2**.
- 3 KPIs based on the ICAO list of KPIs. ***If there is a KPI you would like to introduce, please submit it for coordination with the global performance expert group***
- 4 Remarks

| KPA | Performance Objective | KPIs | Remarks |
|-----|-----------------------|------|---------|
| | | | |
| | | | |
| | | | |
| | | | |

Table PMP III-4 – Performance baseline within the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs/ CTAs/TMAs/Airports by State within **Table ATM I-1** or **Table PMP III-(NAME Region) - 1** and **Table AOP I-1**.
- 3 Value for the list of KPIs in **Table PMP III-3**.
- 4 Remarks

| STATE | FIR/CTA/TMA /AIRPORT | KPIs | | | | | | Remarks |
|-------|-------------------------|------|---|---|--|--|--|---------|
| | | 1 | 2 | 3 | | | | |
| | | | | | | | | |

Table PMP III-5 – Performance targets and needs within the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs/CTAs/TMAs/Airports by State within **Table ATM I-1** or **Table PMP III-(NAME Region) - 1** and **Table AOP I-1**.
- 3 Targets for the list of KPIs in **Table PMP III-3. (include the value of the regional targets/needs for the different operational environments identified in step 1)**
- 4 Remarks

| STATE | FIR/CTA/TMA/AIRPORT | Targets | | | | | | Remarks |
|-------|---------------------|---------|---|---|--|--|--|---------|
| | | 1 | 2 | 3 | | | | |
| | | | | | | | | |

Table PMP III-6 – Deployment planning: selected ASBU Elements / Operational Improvements for the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs/ CTAs/TMAs/Airports by State within **Table ATM I-1** or **Table PMP III-(NAME Region) - 1** and **Table AOP I-1**.
- 3 Selected ASBU elements /operational improvements for each operational environment.

Please note that the ASBU elements are a set of operational improvements, however, there could be other improvements outside of the ASBU framework that might address identified issues and opportunities and therefore contribute to achieve the pursued level of performance.

- 4 Year when implementation of the selected solution is planned to start.
- 5 Year when implementation of the selected solution is foreseen to be completed.
- 6 Remarks

| STATE | FIR/CTA /TMA/AIRPORT | ASBU Elements / Operational Improvements | Start Year | End Year | Remarks |
|-------|----------------------|------------------------------------------------|---------------|-------------|---------|
| | | | | | |

Table PMP III-7 – Implementation progress on the selected operational improvements of the ASBU elements / Operational Improvements for the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs/CTAs/TMAs/Airports by State within **Table ATM I-1** or **Table PMP III-(NAME Region) - 1** and **Table AOP I-1**.
- 3 Selected ASBU elements/operational improvement for each operational environment.

Please note that the ASBU elements are a set of operational improvements, however, there could be other improvements outside of the ASBU framework that might address identified issues and opportunities and therefore contribute to achieve the pursued level of performance.

- 4 Year when implementation of the selected solution is planned to start **PMP III-6**.
- 5 Year when implementation of the selected solution is foreseen to be completed **PMP III-6**.
- 6 Implementation progress:
 - Completed (100%): the development or improvement is reportedly fulfilled (it is either in operational use or there is reported on-going compliance)
 - Ongoing (1-99%): implementation is reported on-going, however not yet fully completed
 - Planned (0%): a planned schedule and proper (approved and committed budgeted) actions are specified within the agreed data for completion but implementation has not yet kicked off
 - Late (0-99%): part or all of the actions leading to completion are “planned” to be achieved after the end year date; or the implementation is ongoing but will be achieved later than that data or the end year date is already exceeded.
- 7 Remarks

| STATE | FIR/CTA /TMA /AIRPORT | ASBU Elements / Operational Improvements | Start Year | End Year | Implementation progress | Remarks |
|-------|-----------------------|------------------------------------------|------------|----------|-------------------------|---------|
| | | | | | | |

Table PMP III-8 – Performance benefits accrued form the implementation of the selected ASBU elements / Operational Improvements for the (NAME) Region

EXPLANATION OF THE TABLE

Column

- 1 States in **Table GEN I-1**
- 2 List of FIRs/ CTAs/ TMAs/Airports by State within **Table ATM I-1** or **Table PMP III-(NAME Region) - 1** and **Table AOP I-1**.
- 3 Selected ASBU elements/operational improvements for each operational environment.
Please note that the ASBU elements are a set of operational improvements, however, there could be other improvements outside of the ASBU framework that might address identified issues and opportunities and therefore contribute to achieve the pursued level of performance.
- 4 Value after implementation for the list of KPIs in **Table PMP III-3**.
- 5 Remarks

| STATE | FIR/CTA /TMA/AIRPORT | ASBU Elements/operational improvements | KPI | | | Remarks |
|-------|----------------------|----------------------------------------|-----|---|---|---------|
| | | | 1 | 2 | 3 | |
| | | | | | | |

[Type text]

APPENDIX G
Provisions of the ICAO Annexes for the operation of Unmanned Aircraft}

| Annexes | Provisions | Area |
|----------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Annex 1: Personnel licenses | Remote pilot licenses | <i>Safety (SAF)</i> |
| Annex 2: Rules of the Air | General rules and additional documentation under development. | <i>Air Navigation (ATM)</i> |
| Annex 3: Meteorological services for international air navigation | Requirements for operations | <i>Air Navigation (MET)</i> |
| Annex 4: Aeronautical charts | Requirements for operations | <i>Air Navigation (AIM)</i> |
| Annex 5: Units of measurement to be used in air and land operations. | To be determined | <i>Air Navigation (AIM)</i> |
| Annex 6: Aircraft operations | New volume in development | <i>Safety (SAF)</i> |
| Annex 7: Aircraft nationality and registration marks | Unmanned aircraft registration and marking | <i>Air Navigation (AIM)</i> |
| Annex 8: Airworthiness | Requirements according to the type of aircraft | <i>Safety (SAF)</i> |
| Annex 9: Facilitation | Entry and take-off of aircraft and transport operations | <i>Security and facilitation (AVSEC/FAL)</i> |
| Annex 10: Aeronautical Telecommunications | New volume under development for links required for unmanned aircraft operations | <i>Air Navigation (CNS)</i> |
| Annex 11: Air Traffic Services | Provisions for unmanned aircraft operations | <i>Air Navigation (ATM)</i> |
| Annex 12: Search and Rescue | According to the operations and type of aircraft | <i>Air Navigation (ATM)</i> |
| Annex 13: Aviation Accident and Incident Investigation | Requirements for unmanned aircraft operations | <i>Safety (SAF)</i> |
| Annex 14: Aerodromes | Requirements for unmanned aircraft operations | <i>Air Navigation (AGA)</i> |
| Annex 15: Aeronautical Information Services | Requirements for unmanned aircraft operations | <i>Air Navigation (AIM)</i> |
| Annex 16: Environmental protection | Requirements for unmanned aircraft operations | <i>Air Navigation (MET)</i> |
| Annex 17: Security | Cybersecurity and Physical Security Requirements | <i>Security and facilitation (AVSEC/FAL)</i> |
| Annex 18: Safe transport of dangerous goods by air | Transport of dangerous goods in unmanned aircraft | <i>Safety (SAF)</i> <i>Security and facilitation (AVSEC/FAL)</i> |
| Annex 19: Safety management | Risk management and analysis for unmanned aircraft operations | <i>Air Navigation (AIM, AGA, ATM, CNS, MET)</i> <i>Safety (SAF)</i> |

In addition, they apply to UAS / RPAS Operations:

1. Chicago Convention: Article 2, 8, 29, 44.
2. Doc 9859: Operational Safety Management Manual
3. ICAO model for the regulation of unmanned aircraft operations (PART 101, 102, 149).
4. Others according to the operation of unmanned aircraft.

APPENDIX H

ICAO documentation available to States on Cybersecurity

Cybersecurity must interact with other disciplines (security, efficiency) in a similar way to what currently occurs with "traditional" aviation security to ensure accurate assessment of exposure to Cybersecurity threats and ensure the development of cybersecurity strategies. -effective and efficient protection based on risk.

Cybersecurity must build bridges between aviation security and protection, since the multidisciplinary nature of Cybersecurity must benefit from security and protection

Why Cybersecurity in Civil Aviation?

The interconnection and interoperability of digital systems among aviation stakeholders broadens the landscape of cyber threats.

Air navigation areas affected:

1. *Air navigation*
2. *Security and facilitation*
3. *Safety*

Available documentation:

1. Resolution A40-10: Addressing Cybersecurity in civil aviation
2. Cybersecurity policy template for air traffic management.
3. Security Management Manual (SMM) (Doc 9859).
4. ICAO Aviation Security Global Risk Context Statement (Doc 10108)
5. Aviation Security Manual (Doc 8973)
6. Annex 17: Security provisions
7. Safety Manual for Air Traffic Management (Doc 9985)
8. Annex 19; Security management.
9. ICAO Aviation Cybersecurity Strategy
10. CANSO Standard of Excellence in Cybersecurity
11. The ISO/IEC 27000 series comprises information security standards
12. ICAO Cybersecurity Action Plan


— — — — —

**APPENDIX I
IFAIMA PRESENTATION**

1. Specifications for data sets, by EUROCONTROL:

| Topic | Eurocontrol Specification | Guidance |
|----------------------------------------------|---------------------------|------------------------------------------------------|
| <i>Digital AIP Data Set</i> | End 2021 | Available |
| <i>Digital Obstacle Data Set</i> | End 2021 | Partially available |
| <i>Airport Mapping Data Set</i> | - | Available |
| <i>Instrument Flight Procedures Data Set</i> | Planned - 2022 | Initial work in progress (in relation with AIXM 5.2) |
| <i>Terrain Data Sets</i> | - | - |
| <i>Digital NOTAM</i> | 2022 – Work in progress | Work in progress |

2. A new topic was the AIM towards ATM Digitization, with the following schematic proposal:

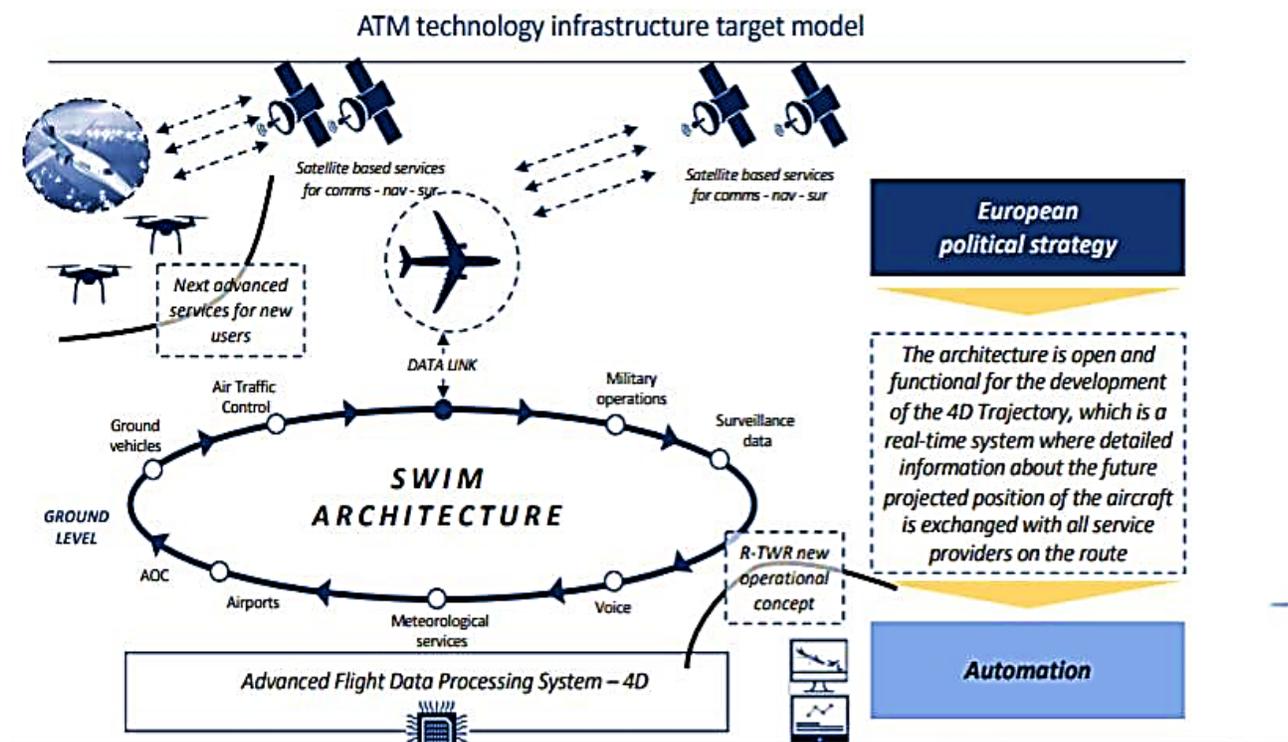

3. The topic of Provision of digital aeronautical information and the “Aeronautical Common Service (ASC) was introduced and the topic of the new SNOWTAM concept with its significant changes that have created confusion in various parts of the World, said changes, at least the most significant fueros informed:

- A new SNOWTAM will be broadcast each time a new Runway Condition Report (RCR) is received.
- RCR will start when there is a significant change in the condition of the runway surface.

4. The runway surface condition notification should continue to reflect significant changes until the runway is no longer contaminated. A significant change in the condition of the track surface is considered as long as there is any change in:

- a) the Runway Condition Code (RWYCC);
- b) the type of pollutant;
- c) coverage/percentage of pollutants
- d) the depth of the contaminant; and
- e) other information, for example a pilot report of the braking action on the track, which, based on the evaluation techniques used, are known to be significant.

Water on runway

