



International Civil Aviation Organization

MIDANPIRG RANP/NANP Task Force

First Meeting (RANP/NANP TF/1)

(Cairo, Egypt, 19 – 22 February 2024)

Agenda Item 6: Performance -Based Approach

ICAO MID ANP VOLUME III

(Presented by the Secretariat)

SUMMARY

This paper presents the MID Air Navigation Plan Volume III for review and further improvement, as deemed necessary.

Action by the meeting is at paragraph 3.

REFERENCES

- GANP 7th edition;
- MIDANPIRG/20 Report; and
- GANP/NANP Workshop (5-8 March 2023, Cairo, Egypt)

1. INTRODUCTION

1.1 The ICAO Council approved the new eANP Template (Volumes I, II and III) and corresponding procedure for amendment on 18 June 2014 (202nd session, fourth meeting).

1.2 The MID eANP Volume I, II and III are available on the ICAO MID website: <http://www.icao.int/MID/Pages/MIDeANP.aspx>

1.3 The Assembly, through Resolution A41-6, endorsed the 2023-2025 edition of the Global Air Navigation Plan (GANP) as the global strategic direction for safety and the evolution of the air navigation system.

1.4 Furthermore, the Assembly 41 resolved that these global plans shall provide the frameworks in which regional, sub-regional and national plans will be developed and implemented, thus ensuring consistency, harmonization and coordination of efforts aimed at improving international civil aviation safety, capacity and efficiency.

2. DISCUSSION

2.1 The meeting may wish to note that Volume III contains dynamic/flexible plan elements providing implementation planning guidance for air navigation systems and their modernization taking into consideration emerging programmes such as the ASBUs and associated technology roadmaps described in the GANP. The ANP Volume III also includes appropriate additional guidance, particularly with regard to implementation, to complement the material contained in the ANP Volumes I and II. The amendment of Volume III does not require approval by the Council (approval of Part II is under the responsibility of the relevant PIRG).

2.2 Taking into consideration the changes brought by the ICAO Global Air Navigation Plan (GANP 7th edition) and the revised version of the MID Air Navigation Strategy (Doc 002), the MID eANP Volume III had to be aligned and amended.

2.3 The meeting may wish to note that the revised version of the MID Air Navigation Plan Volume III at **Appendix A** was endorsed by MIDANPIRG through Conclusion 20/8.

3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) review the MID Air Navigation Plan Volume III at **Appendix A**; and
- b) discuss if there is a need for further amendment/improvement.

APPENDIX A

MID AIR NAVIGATION PLAN

VOLUME III

(March 2023)

APPENDIX A

MID AIR NAVIGATION PLAN

VOLUME III

APPENDIX A

TABLE OF CONTENTS

PART 0 — Introduction

PART I — General Planning Aspects (GEN)

PART II – Performance Management Planning (PMP) and ANS Implementation

1. Step 1: Define scope, context and set ambitions/expectations
2. Step 2: Know your system – identify opportunities, issues and set objectives
3. Step 3: Quantify objectives and set targets
4. Step 4: Select solutions
5. Step 5: Implement solutions
6. Step 6: Assess achievements
7. MID Region Air Navigation Systems Performance Based Framework

APPENDICES

- Table DAIM 3-1
- Table DAIM 3-2
- Table DAIM 3-3
- Table DAIM 3-4-1
- Table DAIM 3-4-2
- Table DAIM 3-4-3
- Table AMET 3-1
- Table AMET 3-2
- Table AMET 3-3
- Table AMET 3-4
- Table APTA 3-1
- Table ACAS 3-1
- Table ASUR 3-1

APPENDIX A

MID ANP, VOLUME III

PART 0 – INTRODUCTION

1. INTRODUCTION

1.1 The background to the publication of ANPs in three volumes is explained in the Introduction of Volume I. The procedure for amendment of Volume III is also described in Volume I. Volume III contains dynamic/flexible plan elements related to the application of a performance-based approach for a cost-effective and benefit-driven modernization of the air navigation system in line with the Global Air Navigation Plan (GANP).

1.2 Collaborative decision-making is key for a cost-effective modernization of the air navigation system and ensures that all concerned aviation stakeholders are involved and given the opportunity to influence decisions in order to reach defined performance objectives. Volume III guides the aviation community in the application of performance management process and identification of relevant and timely operational improvements to a given region's air navigation system including some within the Aviation System Block Upgrade (ASBU) framework.

1.3 The information contained in Volume III is, therefore, related to:

- Planning: objectives, priorities, targets and needs planned at regional or sub-regional levels;
- Monitoring and reporting: performance and implementation monitoring of the agreed targets. This information should be used as the basis for reporting purposes (i.e.: global and regional air navigation reports and performance dashboards); and/or
- Guidance: providing regional guidance material for the implementation of specific system/procedures in a harmonized manner.

1.4 MIDANPIRG is responsible for managing and updating Volume III on a regular basis.

1.5 Whereas ICAO addresses the planning strategy at the global and regional levels, planning at the national level is the responsibility of States. A national planning framework should be developed by each State based on its needs and in collaboration with regional and global partners. This will ensure to the greatest extent possible that solutions are internationally harmonized and integrated.

1.6 National air navigation plans, as well as other national plans dealing with other aspects of aviation such as safety, security and facilitation, should all be linked together in a broader national aviation plan to ensure an integrated strategic approach at the State level. This broader plan can be considered as a civil aviation “master plan” addressing all aspects of air transport at the State level. The objective is to provide a clear and comprehensive planning and implementation strategy for the future development of the entire civil aviation sector in terms of policies, legislation, objectives, facilities, equipment, organization and capacity-building.

1.7 The master plan should also emphasize the importance of air transport for the economic development of the State. As such, the master plan should be linked to the State's overarching national development plan, where applicable, in order to mobilize public and private resources and partnerships for the implementation of the plan and to strengthen the civil aviation sector.

1.8 A clearly defined relationship between national air navigation plans aligned with the global and regional plans (GANP and RANP), civil aviation master plans and States' national development plans will enable the prioritization and optimum allocation of resources for all planned projects within States and across all sectors of activity.

APPENDIX A

MID ANP, VOLUME III

PART I - GENERAL PLANNING ASPECTS (GEN)

1. PLANNING METHOD

1.1 Planning for the modernization of the air navigation system must begin with a thorough understanding of user system requirements and take into account traffic density and complexity, and the level of sophistication required for the provision of necessary services, among other elements.

1.2 The Thirteenth Air Navigation Conference recommended that ICAO encourage the planning and implementation regional groups (PIRGs) to embrace a performance-based approach (PBA) for implementation and adopt the six-step performance management process, as described in the Manual on Global Performance of the Air Navigation System (Doc 9883), by reflecting the process in Volume III of all regional air navigation plans. Recommendation 4.3/1 — Improving the performance of the air navigation system, refers.

1.3 A PBA is results-oriented, helping decision makers set priorities and determine appropriate trade-offs that support optimum resource allocation while maintaining an acceptable level of safety performance and promoting transparency and accountability among stakeholders.

1.4 A PBA is a decision-making method based on three principles: strong focus on desired/required results; informed decision-making driven by those desired/required results; and reliance on facts and data for decision-making. The PBA is a way of organizing the performance management process.

1.5 Although there are several ways to apply a PBA, ICAO advocates for a globally harmonized performance management process based on six well-defined steps. The goal of this cyclic six-step method is to identify optimum solutions based on operational requirements and performance needs so that the expectations of the aviation community can be met by enhancing the performance of the air navigation system and optimizing allocation and use of the available resources.

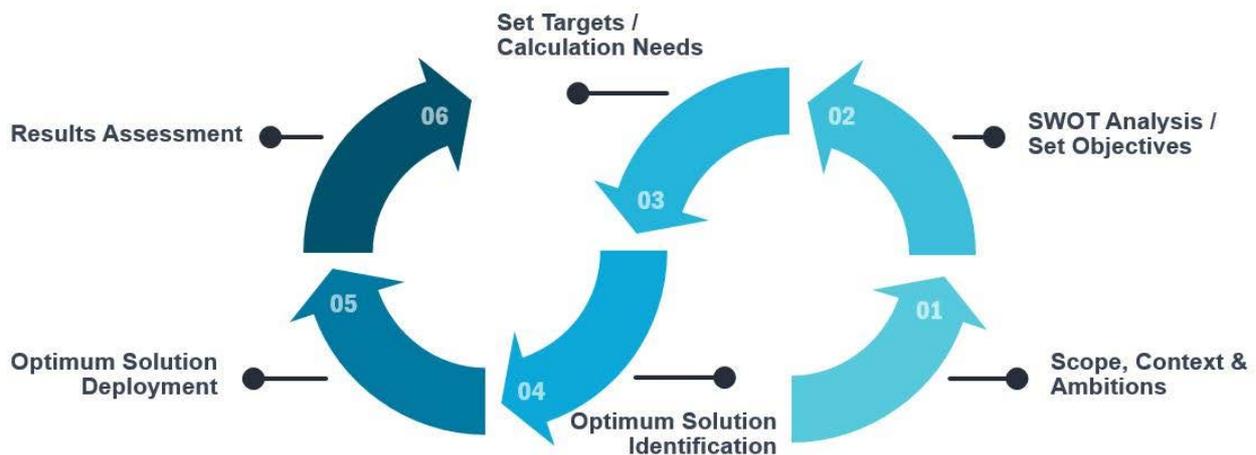


Figure 1 Six-step performance management process

1.6 Steps 1 and 2 serve to know the air navigation system, its strengths, weakness, opportunities and threats as well as how it is performing in order to set objectives. The catalogue of performance objectives that is part of the GANP global performance framework facilitates the definition of objectives.

APPENDIX A

1.7 Based on these objectives, targets can be set in step 3. An analysis of this data leads to the identification of potential solutions, in step 4, to achieve the targets by addressing the weaknesses and threats of the system. Once a set of potential solutions have been identified, a cost-benefits analysis, environmental impact assessment, safety assessment and human factor assessment should be performed to identify the optimum solution. In the GANP performance framework, a list of KPIs, linked to the relevant objectives in the performance objectives catalogue, is provided to set targets through the quantification of objectives (**See list below**).

KPI 01	Departure punctuality	KPI 13	Taxi-in additional time
KPI 02	Taxi-out additional time	KPI 14	Arrival punctuality
KPI 03	ATFM Slot adherence	KPI 15	Flight time variability
KPI 04	Filed flight plan en-route extension	KPI 16	Additional fuel burn
KPI 05	Actual en-route extension	KPI 17	Level-off during climb
KPI 06	En-route airspace capacity	KPI 18	Level capping during cruise
KPI 07	En-route ATFM delay	KPI 19	Level-off during descent
KPI 08	Additional time in terminal airspace	KPI 20	Number of Aircraft Accidents
KPI 09	Airport peak capacity	KPI 21	Number of RWY Incursions
KPI 10	Airport peak throughput	KPI 22	Number of RWY Excursions
KPI 11	Airport throughput efficiency	KPI 23	Number of Airprox/TCAS
KPI 12	Airport/Terminal ATFM delay		Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions

1.8 Step 5 manages a coordinated deployment of the agreed solution by all stakeholders based on the previous steps. Regional plans might need to be developed for the deployment of solutions by drawing on supporting technology requirements.

1.9 Finally, step 6 consists of monitoring and reporting the performance of the system after the full deployment of the solution.

1.10 This is an iterative planning process, which may require repeating several steps until a final plan with specific targets is in place. This planning method requires full involvement of regulators (CAAs), service providers, airspace users and other stakeholders, thus ensuring commitment by all for implementation.

2. Review and evaluation of air navigation planning and reporting and monitoring results

2.1 The progress and effectiveness against the priorities set out in the National and Regional Air Navigation Plan should be annually reported to ICAO using a consistent reporting format.

2.2 Performance monitoring requires a measurement strategy. Data collection, processing, storage and reporting activities supporting the identified regional/national/local performance metrics are fundamental to the success of performance-based approaches.

2.3 The air navigation planning and implementation performance framework prescribes reporting, monitoring, analysis and review activities being conducted on a cyclical, annual basis.

2.4 Reporting and monitoring results will be used to develop the MID Annual Air Navigation Reports. They will be analyzed by MIDANPIRG to steer the air navigation improvements, recommend corrective actions and review the agreed objectives, priorities and targets, if needed. The results will also be used by ICAO to develop the annual Global Air Navigation Report. The Report results will provide an opportunity for the international civil aviation community to compare progress across different ICAO Regions in the establishment of air navigation infrastructure and performance-based procedures.

2.5 The Report will also provide the ICAO Council with detailed annual results on the quality of service provided worldwide as well as the performance areas, which require more attention. This will serve as input for the triennial policy adjustments to the GANP and its priorities.

APPENDIX A

APPENDIX A

MID ANP, VOLUME III

PART II – PERFORMANCE MANAGEMENT PLANNING (PMP) AND ANS IMPLEMENTATION

1. STEP 1: DEFINE SCOPE, CONTEXT AND SET AMBITIONS/EXPECTATIONS

1.1 The purpose of Step 1 is to reach a common agreement on the scope and (assumed) context of the “system” on which the performance management process will be applied, as well as a common view on the general nature of the expected performance improvements. An important part of the PBA is the development of cause-effect relationships between these technical performance characteristics and the selected higher level KPAs from the eleven key performance areas (KPAs) as identified in the Global Air Traffic Management Operational Concept (Doc 9854).

1.2 Scope definition is important to avoid misunderstandings, in particular about the performance (improvement) which can be expected within the given scope. By defining the scope of the performance management activity, the limits of responsibility and accountability are also defined. Geographically, the scope could be an Aerodrome, FIR, TMA, CTA, etc., but the scope definition could include additional details such as type of traffic (international, overflight, IFR, VFR), etc.

1.3 Within a given scope, the purpose of identifying general ambitions and expectations is to develop a strategic view on the (performance) results that are expected.

1.4 States are requested to define the scope and context of the required performance improvements to the national air navigation system as well as the nature of the expected performance improvements.

1.5 The expectations of the global aviation community are defined in 11 Key Performance Areas (KPAs). The GANP considers all these areas through the performance ambitions. Although all these areas are equally important, as they are interrelated and cannot be considered in isolation, some areas are more visible to society than others.

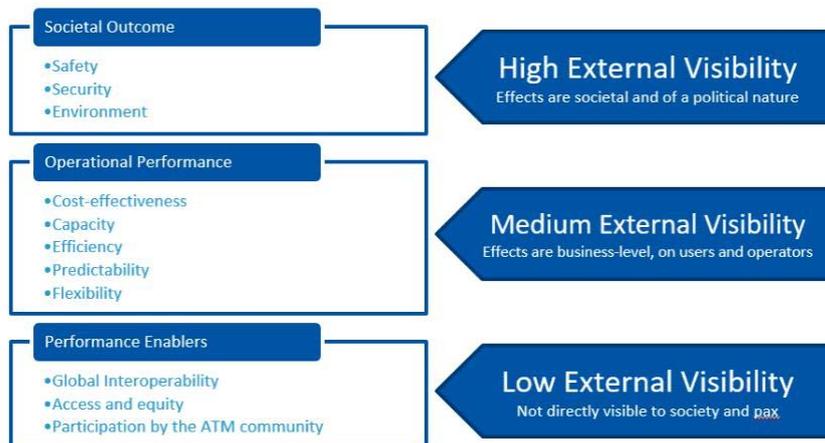


Figure 2 The 11 KPAs of the GANP

APPENDIX A

1.6 A Summary of the GANP Performance Ambitions is provided hereafter:

SUMMARY OF THE GANP PERFORMANCE AMBITIONS “A high performing system by 2040 and beyond”	
KPA	Ambition
ACCESS AND EQUITY	No aviation community member excluded or treated unfairly.
CAPACITY	Nominal capacity easily scalable with demand.
	Disruptive events do not interrupt service provision and do not significantly affect the performance of the system.
COST-EFFECTIVENESS	No increase of total direct ANS cost while maintaining the safety and quality of service.
	Significant increase of ANS productivity, irrespective of demand.
EFFICIENCY	Reduction of the gap between the flight efficiency achieved and the desired optimum trajectory of airspace users.
ENVIRONMENT	ANS-induced inefficiencies to be progressively removed to contribute to the global ICAO aspirational goals for CO ₂ emissions.
	To benefit from achieved flight efficiency gains.
FLEXIBILITY	To absorb required changes to individual business and operational trajectories.
INTEROPERABILITY	Essential at an operational and technical level.
PARTICIPATION BY THE ATM COMMUNITY	Pre-agreed level of participation to make the maximum shared use of the air navigation resources.
PREDICTABILITY	No increase in ANS delivery variability including asset availability.
SAFETY	Zero ANS-related accidents and a significant (50%) reduction of ANS-related serious incidents.
SECURITY	Zero significant disruptions due to cyber incidents

Achieving the above ambitions and realizing the GANP vision will require a series of transformational changes.

2. STEP 2: KNOW YOUR SYSTEM – IDENTIFY OPPORTUNITIES, ISSUES AND SET OBJECTIVES

2.1 The purpose of Step 2 is to develop a detailed understanding of the performance behaviour of the system (this includes producing a list of opportunities and issues), and to decide which specific performance aspects are essential for meeting the general expectations. The essential performance aspects are those which need to be actively managed (and perhaps improved) by setting performance objectives.

2.2 Based on the scope, context and general ambitions/expectations which were agreed to during the previous step, the system should be analysed in order to develop an inventory of present and future opportunities and issues (weaknesses, threats) that may require performance management attention. This part of the process is generally known as the SWOT (strengths, weaknesses, opportunities and threats) analysis.

2.3 A SWOT analysis, requires the identification of:

- *Strengths*: internal attributes of a system or an organization that can help in the realization of ambitions or in meeting expectations.
- *Weaknesses*: internal attributes of a system or an organization that are a detriment to realizing ambitions or meeting expectations.

APPENDIX A

- *Opportunities*: are external conditions that help in the realization of ambitions or in meeting expectations.
- *Threats*: external conditions that are a detriment or harmful to realizing ambitions or meeting expectations.

2.4 Once the strengths, weakness, opportunities and threats are identified, action can be taken to target and exploit or remove these factors. The SWOT analysis should be conducted at local/national level.

Regional objectives

2.5 Based on regional performance and operational needs, differences, constraints and opportunities, MIDANPIRG is responsible for defining regional planning and implementation priorities, aligned with the GANP.

2.6 Considering the global objectives defined in the GANP and those identified by States, within the key performance areas prioritized in step 1, MIDANPIRG may set common objectives to be pursued by the States within the Region and to be monitored at regional level.

3. STEP 3: QUANTIFY OBJECTIVES AND SET TARGETS

3.1 The principle of “reliance on facts and data for decision-making” implies that objectives should be specific, measurable, achievable, relevant and time-bound (SMART). The purpose of Step 3 in the process is to ensure that these aspects are properly addressed.

3.2 During this step, the current/past performance (Performance Baseline), expected future performance, as well as actual progress in achieving performance objectives is quantitatively expressed by means of Key Performance Indicators (KPIs).

3.3 KPIs are not often directly measured. They are calculated from supporting metrics according to clearly defined formulas. Performance measurement is therefore done through the collection of data for the supporting metrics.

3.4 Data collection should take place at the most detailed level of granularity that can be afforded because the availability of detailed data greatly increases the effectiveness of the performance-based approach.

3.5 Performance targets are closely associated with performance indicators (KPIs) as they represent the values of performance indicators that need to be reached or exceeded to consider a performance objective as being fully achieved.

3.6 To understand how challenging it is to reach a target, one should know the baseline performance. The difference between the baseline and the target is called the performance gap. The determination of the baseline performance (calculation of baseline indicator values) is done based on the previous iteration of the process (historical data).

List of regional indicators

3.7 The GANP includes a series of KPIs linked to the catalogue of performance objectives within the 11KPA. At the Regional level, MIDANPIRG defines regional performance objectives, using the key performance indicators (KPIs) of the GANP, to achieve regional performance ambitions. The list of KPIs to be used for the regional level is as follows:

APPENDIX A

Table 3. MID Air Navigation KPIs

KPI (KPA)	Title / Definition	Measurement Units	Variants
KPI01 (predictability)	Departure punctuality Percentage of flights departing from the gate on-time (compared to schedule).	% of flights	Variant to be selected from those available in the GANP
KPI02 (Efficiency Environmental Impact)	Taxi-out additional time Actual taxi-out time compared to an unimpeded/reference taxi-out time.	Excess taxi-out time in Minutes/flight	Variant to be selected from those available in the GANP
KPI06 (Capacity)	En-route airspace capacity The maximum volume of traffic an airspace volume will safely accept under normal conditions in a given time period.	Movements/hr	Variant to be selected from those available in the GANP
KPI09 (Capacity)	Airport peak capacity The highest number of operations an airport can accept in a one-hour time frame (also called declared capacity). Can be computed for arrivals, departures or arrivals + departures.	Number of arrivals / hour	Variant to be selected from those available in the GANP
KPI13 (Efficiency Environmental Impact)	Taxi-in additional time Actual taxi-in time compared to an unimpeded/reference taxi-in time	Excess taxi-in time in Minutes/flight	Variant to be selected from those available in the GANP
KPI14 (predictability)	Arrival punctuality Percentage of flights arriving at the gate on-time (compared to schedule)	% of flights	Variant to be selected from those available in the GANP
KPI20 (Safety)	Number of Aircraft Accidents Accident' is defined in ICAO Annex 13, Chapter 1-Definitions; ADREP: Accident Data Report	Number of accidents / year	Variant 1 (GASP): Aircraft MTOW > 2 250 kg 1.1 National accident occurrence level
KPI21 (Safety)	Number of RWY Incursions Number of occurrences at an aerodrome involving the incorrect presence of an aircraft, vehicle, or person on the protected area of a surface designated for the landing and take-off of aircraft. (CICTT Taxonomy definition)	Number of runway incursions / year	None
KPI22 (Safety)	Number of RWY Excursions Number of veer offs or overruns of the runway surface.	Number of runway excursions / year	None
KPI23 (Safety)	Number of Airprox/TCAS Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions Number of airproxes, TCAS alerts, loss of separation as well as near collisions or collisions between aircraft in flight.	Number of airprox/TCAS alert/loss of separation/near midair collisions/midair collisions (MAC)/ year	Variants to be selected from those available in the GANP

3.8 The measurement of these KPIs, as well as the progress in achieving performance objectives will be monitored at the regional level. Yet, States, as part of their national air navigation plan, should use additional KPIs to measure the progress in achieving all their performance objectives.

APPENDIX A

4. STEP 4: SELECT SOLUTIONS

4.1 The purpose of this step is to combine the knowledge of baseline performance, opportunities and issues with the performance objectives and targets, in order to make decisions in terms of priorities, trade-offs, selection of solutions and resource allocation. The aim is to optimize the decisions to maximize the achievement of the desired/required (performance) results.

4.2 This is the part of the process where decision-makers need to know their options for mitigating pre-identified issues and therefore to exploit available opportunities. The list then needs to be analyzed in a performance oriented way, to assess/quantify the impact of drivers, constraints, impediments, etc., on the objectives under consideration. The solution might be ASBU or non-ASBU solution. Depending on the nature of the project, the output of this process is either a single preferred solution or a roadmap of selected solutions. In any case, decision-makers need to gain a good understanding of the strategic fit, the benefits, cost and feasibility of each option for operational improvement.

4.3 States should consider the operational improvements (ASBU elements) within the ASBU framework as potential solutions to improve the selected objectives/KPIs in the operational environment under analysis. In order to help States with this task, ICAO has developed the Air Navigation System Performance Analysis (AN-SPA) tool, available for free at:

<https://www4.icao.int/ganpportal/ANSPA/Reports>

4.4 Considering the identified needs at regional level, the ICAO SARPs linked to the ASBU framework, the required performance improvements, the States' needs and capabilities and users' requirements, MIDANPIRG sets in the MID Region Air Navigation Strategy (MID Doc 002) available at: <https://www.icao.int/MID/MIDANPIRG/Pages/MID-Docs.aspx>, the list of priority 1 ASBU Threads/Elements with their associated areas of applicability and targets, for implementation by States and monitoring at the regional level.

4.5 In addition to the priority 1 ASBU Elements, States should report to ICAO all the optimum solutions that they have identified for the achievement of the agreed performance objectives, in order to be included in the annual Web-based MID Air Navigation Report available at: <https://www.icao.int/MID/MIDANPIRG/Pages/MID-AN.aspx>.

5. STEP 5: IMPLEMENT SOLUTIONS

5.1 Step 5 is the execution phase of the performance management process. This is where the changes and improvements that were decided upon during the previous steps are organized into detailed plans, implemented, and begin delivering benefits.

5.2 Once the optimum solution/s has/have been identified, it is the moment to start the execution phase of the performance management process. The changes and improvements that have been identified as the optimum solution for the problem during the previous steps are organized into plans, implemented and begin delivering services to achieve the expected performance. During this execution phase, it is important to keep track of the project deployments (time, budget, etc.).

6. STEP 6: ASSESS ACHIEVEMENTS

6.1 The purpose of Step 6 is to continuously keep track of performance and monitor whether performance gaps are being closed as planned and expected.

6.2 Once the project is implemented, it is time to assess the benefits from the implementation. This means measuring the performance of the operational environment under analysis once the solution/s has/have been deployed.

6.3 First and foremost, this implies data collection to populate the supporting metrics with the data needed to calculate the performance indicators. The indicators are then compared with the targets defined during Step 3 to draw conclusions on the speed of progress in achieving the objectives.

APPENDIX A

6.4 This step also includes monitoring progress of the implementation projects, particularly in those cases where the implementation of solutions takes several years, as well as checking periodically whether all assumptions are still valid and the planned performance of the solutions is still meeting the (perhaps changed) requirements.

6.5 With regard to the review of actually achieved performance, the output of this step is simply an updated list of performance gaps and their causes. In practice, the scope of the activity is often interpreted as being much wider and includes recommendations to mitigate the gaps.

6.6 This is then called performance monitoring and review, which in addition to this step, includes step 1, 2 and 3.

6.7 For the purpose of organizing performance monitoring and review, the task can be broken down into five separate activities:

- Data collection
- Data publication
- Data analysis
- Formulation of conclusions; and
- Formulation of recommendations.

6.8 As part of the process to assess the achievements, States should calculate/estimate the benefits accrued from the implementation of the solutions implemented in step 5.

6.9 States should also report to ICAO on annual basis the status of implementation of the selected solutions and progress achieved. The updates will be reflected in the annual Web-based MID Air Navigation Report available at: icao.int/MIDANReport/Pages/default.aspx; which will reflect also the priority 1 ASBU Threads/Elements implementation status against the objectives and targets as set forth in the MID Air Navigation Strategy (MID Doc 002), available at: [MID Docs \(icao.int\)](http://MID Docs (icao.int)).

6.10 The following Tables available in the **Appendix** are used for the collection of detailed information related to the implementation of associated priority 1 ASBU Threads/Elements, which are used also for the determination of the performance indicators included in the MID Region Air Navigation Strategy (MID Doc 002): DAIM 3-1, DAIM 3-2, DAIM 3-3, DAIM 3-4, AMET 3-1, AMET 3-2, AMET 3-3, AMET 3-4, APTA 3-1, ACAS 3-1 and ASUR 3-1. Other Tables might be developed for other Threads/Elements.

6.11 The monitoring of these Tables is assigned to the relevant MIDANPIRG Sub Groups.

7. MID Region Air Navigation Systems Performance Based Framework

7.1 The following Template could support States in the development of their National Air Navigation Plans (NANPs). It is used also to collect information from States on the implementation of the performance based approach (6 step approach) for the measurement of their air navigation system performance; and for the reporting and monitoring at regional level.

APPENDIX A

MID Region Air Navigation Systems Performance Based Framework/Template

Column

- (1) Scope of Performance Improvement
- (2) KPA (from the ICAO defined 11 Key Performance Areas (KPAs))
- (3) Performance Objectives (ambition/expectations)
- (4) KPIs based on the ICAO list of KPIs and associated variant
- (5) The Baseline of each KPI
- (6) The target of the KPI
- (7) Selected ASBU element(s) /Enabler(s) and/or Non ASBU solution(s) for each operational improvement
- (8) Target Implementation date

Note: The following is just a Sample

Scope/ Applicability	KPA & Focus Area	Performance Objective	KPI/ Variant	KPI Baseline	KPI Target	Operational Improvements (ASBU Elements/Enablers & Non ASBU)	Target Date
1	2	3	4	5	6	7	8
Aerodrome	Predictability (Punctuality)	Maximize departure punctuality	KPI 01 (Departure punctuality) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Efficiency (Flight time/ distance)	Minimize Taxi- out time	KPI 02 (Taxi-out additional time) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Capacity (Capacity, throughput & utilization)	Increase airport peak arrival capacity	KPI 09 (Airport peak capacity) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Efficiency (Flight time/ distance)	Minimize Taxi-in time	KPI 13 (Taxi-in additional time) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport

APPENDIX A

Scope/ Applicability	KPA & Focus Area	Performance Objective	KPI/ Variant	KPI Baseline	KPI Target	Operational Improvements (ASBU Elements/Enablers & Non ASBU)	Target Date
1	2	3	4	5	6	7	8
Aerodrome	Predictability (Punctuality)	Maximize Arrival punctuality	KPI 14 (Arrival punctuality) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Safety	Minimize Number of RWY Incursions Incidents & Accidents	KPI 21 (Nr. of RWY Incursions)	TBD for each State/Airport	TBD for each State/Airport	TBD by each State/Airport	TBD by each State/Airport
Aerodrome	Safety	Minimize Number of RWY Excursions Incidents & Accidents	KPI 22 (Nr. of RWY Excursions)	TBD for each State/Airport	TBD for each State/Airport	TBD by each State/Airport	TBD by each State/Airport
ATC (ACC Sectors)	Capacity (Capacity, throughput & utilization)	Enhance capacity of ACC Sectors	KPI 06 (En-route Airspace capacity) Variant X	TBD for each ACC Sector	TBD for each ACC Sector	TBD for each ACC	TBD for each ACC
State/FIR	Safety	Minimize Number of Aircraft Accidents	KPI 20 (Number of Aircraft Accidents) Variant X	TBD for each State/FIR	TBD for each State/FIR	TBD for each State/FIR	TBD for each State/FIR
FIR	Safety	Minimize Number of Airprox/TCAS Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions	KPI 23 (Number of Airprox/TCAS Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions) Variants X, Y, Z	TBD for each FIR	TBD for each FIR	TBD for each FIR	TBD for each FIR

APPENDIX A

MID Region Air Navigation Systems Performance Based Framework Template (Sample)

Scope/ Applicability	KPA & Focus Area	Performance Objective	KPI/Variant	KPI Baseline	KPI Target	Operational Improvements/ (ASBU Elements/Enablers & Non ASBU)	Target Date
3	1	2	4	5	6	7	8
Aerodrome	Predictability (Punctuality)	Maximize departure punctuality	KPI 01 (Departure punctuality) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Efficiency (Flight time/ distance)	Minimize Taxi- out time	KPI 02 (Taxi-out additional time) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Cairo Airport- Egypt (HECA)	Efficiency (Flight time & distance)	Avoid taxi-out additional time resulting from adverse conditions	KPI 02 Variant 1 – basic (computed without departure gate and runway data) Reference Taxi Time: 15 min	5 Minutes 4 Seconds	4 Minutes	<ul style="list-style-type: none"> • SURF-B1/4 • AMET-B0/1 • SURF-B1/5 • Applying new procedures 	end of 2025 end of 2024 end of 2025 end of 2025
Erbil Airport- Iraq (ORER)	Efficiency (Flight time/ distance)	Minimize Taxi-out time	KPI 02 Variant 1 – basic (computed without departure gate and runway data) Reference Taxi Time: 10 min	4min.	2min.	RSEQ B0/2 SURF B1/1 SURF B1/4 Layout improvement	Dec 2024 Dec 2024 Dec 2026 Dec 2026
Aerodrome	Capacity (Capacity, throughput & utilization)	Increase airport peak arrival capacity	KPI 09 (Airport peak capacity) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport

APPENDIX A

Scope/ Applicability	KPA & Focus Area	Performance Objective	KPI/Variant	KPI Baseline	KPI Target	Operational Improvements/ (ASBU Elements/Enablers & Non ASBU)	Target Date
3	1	2	4	5	6	7	8
Aerodrome	Efficiency (Flight time/ distance)	Minimize Taxi- in time	KPI 13 (Taxi-in additional time) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Aerodrome	Predictability (Punctuality)	Maximize Arrival punctuality	KPI 14 (Arrival punctuality) Variant X	TBD for each Airport	TBD for each Airport	TBD by each State/Airport	TBD for each Airport
Khartoum Airport Sudan (HSSK)	Predictability (Punctuality)	Increase the number (%) of scheduled flights adhering to the scheduled on- block time	KPI14 Variant 2A – % of arrivals within ± 15 minutes of scheduled time of arrival	50%	80%	<ul style="list-style-type: none"> • RSEQ-B0/1 • New rapid exit taxiway 	end of 2025 end of 2026
Aerodrome	Safety	Minimize Number of RWY Incursions Incidents & Accidents	KPI 21 (Nr. of RWY Incursions)	TBD for each State/Airport	TBD for each State/Airport	TBD by each State/Airport	TBD by each State/Airport
Aerodrome	Safety	Minimize Number of RWY Excursions Incidents & Accidents	KPI 22 (Nr. of RWY Excursions)	TBD for each State/Airport	TBD for each State/Airport	TBD by each State/Airport	TBD by each State/Airport

APPENDIX A

Scope/ Applicability	KPA & Focus Area	Performance Objective	KPI/Variant	KPI Baseline	KPI Target	Operational Improvements/ (ASBU Elements/Enablers & Non ASBU)	Target Date
3	1	2	4	5	6	7	8
ATC (ACC Sectors)	Capacity (Capacity, throughput & utilization)	Enhance capacity of ACC Sectors	KPI 06 (En-route airspace capacity) Variant X	TBD for each ACC Sector	TBD for each ACC Sector	TBD for each ACC	TBD for each ACC
Jordan Amman ACC North Sector	Capacity	Enhance capacity of Amman ACC North Sector	KPI 06 Variant 1 – airspace throughput (entry flow rate)	30 Mvts per hour	50 Mvts per hour	COMI B0/4 NAV B0/3 CSEP B1/3	Dec 2024 Dec 2024 Dec 2026
State/FIR	Safety	Minimize Number of Aircraft Accidents	KPI 20 (Number of Aircraft Accidents) Variant X	TBD for each State/FIR	TBD for each State/FIR	TBD for each State/FIR	TBD for each State/FIR
FIR	Safety	Minimize Number of Airprox/TCAS Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions	KPI 23 (Number of Airprox/TCAS Alert/Loss of separation/Near mid Air Collisions/Mid Air Collisions) Variants	TBD for each FIR	TBD for each FIR	TBD for each FIR	TBD for each FIR
Iraq – Baghdad FIR (ORBB)	Safety	To reduce number of TCAS alerts & loss of separation	KPI 23 Variant 2: TCAS alerts Variant 3: loss of separation	50 TCAS alerts/year 30 Loss of separation/year	30 TCAS alerts/year 20 Loss of separation/year	<ul style="list-style-type: none"> Applying new procedures Develop advanced training program 	end of 2025 end of 2025

APPENDIX A

Note: - The collection and processing of data related to Columns 1 to 7 is reflected in the MID Annual Air Navigation Reports: [<https://www.icao.int/MID/MIDANPIRG/Pages/MID-AN.aspx>]
- The monitoring of the priority 1 ASBU elements implementation is governed by the MID Region Air Navigation Strategy (MID Doc 002): [<https://www.icao.int/MID/MIDANPIRG/Pages/MID-Docs.aspx>] and the status of implementation of the priority 1 ASBU elements is provided through the MID Annual Air Navigation Reports [<https://www.icao.int/MID/MIDANPIRG/Pages/MID-AN.aspx>]

APPENDICES

DAIM Digital Aeronautical Information Management

In order to assist States in the planning for the transition from AIS to AIM in an expeditious manner, the following Tables, should be used:

- 1- **Table DAIM 3-1** sets out the requirements for the Provision of AIS/AIM products and services based on the Integrated Aeronautical Information Database (IAID). It reflects the transition from the current product centric AIS to data centric AIM. For the future digital environment, it is important that the authoritative databases are clearly designated and such designation must be published for the users. This is achieved with the concept of the Integrated Aeronautical Information Database (IAID), a single access point for one or more authoritative databases (AIP, Terrain, Obstacles, AMDB, data-driven charting, etc.) for which the State is responsible. This Table will be used for the monitoring of the GANP and MID Region Air Navigation Strategy element DAIM-B1/1.
- 2- **Table DAIM 3-2** sets out the requirements for aeronautical data quality. It will be used for the monitoring of the GANP and MID Region Air Navigation Strategy element DAIM-B1/1.
- 3- **Table DAIM 3-3** sets out the requirements for the implementation of the World Geodetic System – 1984 (WGS-84). The requirement to use a common geodetic system remains essential to facilitate the exchange of data between different systems. The expression of all coordinates in the AIP and charts using WGS-84 is an important first step for the transition to AIM. This Table will be used for the monitoring of the GANP and MID Region Air Navigation Strategy element DAIM-B1/1.
- 4- **Table DAIM 3-4-1** sets out the requirements for the provision of Terrain and Obstacle data sets for Area 1 and Area 4. It will be used for the monitoring of the GANP and MID Region Air Navigation Strategy elements DAIM-B1/3 and DAIM-B1/4.
- 5- **Table DAIM 3-4-2** sets out the requirements for the provision of Terrain and Obstacle data sets for Area 2. It will be used for the monitoring of the GANP and MID Region Air Navigation Strategy elements DAIM-B1/3 and DAIM-B1/4.
- 6- **Table DAIM 3-4-3** sets out the requirements for the provision of Terrain and Obstacle data sets for Area 3 and implementation of Airport Mapping Databases (AMDB). It will be used for the monitoring of the GANP and MID Region Air Navigation Strategy elements DAIM-B1/3, DAIM-B1/4 and B1/5.

Table DAIM 3-1

Provision of AIS/AIM products and services based on the Integrated Aeronautical Information Database (IAID)

EXPLANATION OF THE TABLE

Column:

- 1 Name of the State or territory for which the provision of AIS/AIM products and services based on the IAID is required.
- 2 Requirement for the implementation and designation of the authoritative IAID, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented

Note 1 — The IAID of a State is a single access point for one or more databases (AIP, Terrain, Obstacles, AMDDB, etc.). The minimum set of databases which should be integrated is defined in Annex 15.

Note 2 — The information related to the designation of the authoritative IAID should be published in the AIP (GEN 3.1)
- 3 Requirement for an IAID driven AIP production, shown by:
 - FI – Fully Implemented (eAIP: Text, Tables and Charts)
 - PI – Partially Implemented
 - NI – Not Implemented

Note 3 — AIP production includes, production of AIP, AIP Amendments and AIP Supplements

Note 4 — Charts' GIS-based database should be interoperable with AIP database
- 4 Requirement for an IAID driven NOTAM production, shown by:
 - FC – Fully Compliant
 - NC – Not Compliant
- 5 Requirement for an IAID driven SNOWTAM processing, shown by:
 - FI – Fully Implemented
 - NI – Not Implemented
- 6 Requirement for an IAID driven PIB production, shown by:
 - FC – Fully Compliant
 - PC – Partially Compliant
 - NC – Not Compliant
- 7 Requirement for Procedure design systems to be interoperable with the IAID, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented

Note 5 — full implementation includes the use of the IAID for the design of the procedures and for the storage of the encoded procedures in the IAID
- 8 Requirement for ATS systems to be interoperable with the IAID, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented
- 9 Action Plan — short description of the State's Action Plan with regard to the provision of AIM products and services based on the IAID, especially for items with a "PC", "PI", "NC" or "NI" status, including planned date(s) of full compliance, as appropriate.
- 10 Remarks — additional information, including detail of "PC", "NC", "PI" and "NI", as appropriate.

TABLE DAIM-3-1

Provision of AIS/AIM products and services based on the Integrated Aeronautical Information Database (IAID)

State	IAID	AIP	NOTAM	SNOWTAM	PIB	Procedure Design	ATS	Action Plan	Remarks
<i>1</i>	<i>2</i>	<i>3</i>	<i>4</i>	<i>5</i>	<i>6</i>	<i>7</i>	<i>8</i>	<i>9</i>	<i>10</i>

Table DAIM-3-2 Aeronautical Data Quality

EXPLANATION OF THE TABLE

Column:

- 1 Name of the State or territory.
- 2 Compliance with the requirement for implementation of QMS for Aeronautical Information Services including safety and security objectives, shown by:
 - FC – Fully compliant
 - NC – Not compliant
- 3 Compliance with the requirement for the establishment of formal arrangements with approved data originators concerning aeronautical data quality, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 4 Implementation of digital data exchange with originators, shown by:
 - FI – Implemented
 - PI – Partially Implemented
 - NI – Not implemented

Note 1 — Information providing detail of “PI” and “NI” should be given in the Remarks column (percentage of implementation).
- 5 Compliance with the requirement for metadata, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 6 Compliance with the requirements related to aeronautical data quality monitoring (accuracy, resolution, timeliness, completeness), shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 7 Compliance with the requirements related to aeronautical data integrity monitoring, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 8 Compliance with the requirements related to the AIRAC adherence, shown by:
 - FC – Fully compliant
 - NC – Not compliant
- 9 Action Plan — short description of the State’s Action Plan with regard to aeronautical data quality requirements implementation, especially for items with a “PC”, “PI”, “NC” or “NI” status, including planned date(s) of full compliance, as appropriate.
- 10 Remarks — additional information, including detail of “PC”, “NC”, “PI” and “NI”, as appropriate.

**TABLE DAIM-3-2
Aeronautical Data Quality**

	QMS	Establishment of formal agreements	Digital data exchange with originators	Metadata	Data quality monitoring	Data integrity monitoring	AIRAC adherence	Action Plan	Remarks	
State	1	2	3	4	5	6	7	8	9	10

Table DAIM-3-3

World Geodetic System-1984 (WGS-84)

EXPLANATION OF THE TABLE

Column:

- 1 Name of the State or territory for which implementation of WGS-84 is required.
- 2 Compliance with the requirements for implementation of WGS-84 for FIR and En-route points, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 3 Compliance with the requirements for implementation of WGS-84 for Terminal Areas (arrival, departure and instrument approach procedures), shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 4 Compliance with the requirements for implementation of WGS-84 for Aerodrome, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 5 Compliance with the requirements for implementation of Geoid Undulation, shown by:
 - FC – Fully compliant
 - PC – Partially compliant
 - NC – Not compliant
- 6 Action Plan — short description of the State’s Action Plan with regard to WGS-84 implementation, especially for items with a “PC”, “PI”, “NC” or “NI” status, including planned date(s) of full compliance, as appropriate.
- 7 Remarks — additional information, including detail of “PC” and “NC”, as appropriate.

TABLE DAIM-3-3
World Geodetic System-1984 (WGS-84)

State	FIR/ENR	Terminal	AD	GUND	Action Plan	Remarks
1	2	3	4	5	6	7

Table DAIM-3-4-1

Provision of Terrain and Obstacle data sets for Areas 1 and 4

EXPLANATION OF THE TABLE

Column

- 1 Name of the State or territory for which Terrain and Obstacle data sets for Areas 1 and 4 are required.
- 2 Compliance with requirement for the provision of Terrain data sets for Area 1, shown by:
 - FC – Fully Compliant
 - PC – Partially Compliant
 - NC – Not Compliant
- 3 Compliance with requirement for the provision of Terrain data sets for Area 4, shown by:
 - FC – Fully Compliant
 - PC – Partially Compliant
 - NC – Not Compliant
 - N/A – Not Applicable
- 4 Compliance with requirement for the provision of Obstacle data sets for Area 1, shown by:
 - FC – Fully Compliant
 - PC – Partially Compliant
 - NC – Not Compliant
- 5 Compliance with requirement for the provision of Obstacle data sets for Area 4, shown by:
 - FC – Fully Compliant
 - PC – Partially Compliant
 - NC – Not Compliant
 - N/A – Not Applicable
- 6 Action plan — short description of the State’s Action Plan with regard to compliance with the requirements for provision of Terrain and Obstacle data sets for Areas 1 and 4, especially for items with a “PC” or “NC” status, including planned date(s) of full compliance, as appropriate.
- 7 Remarks— additional information, including detail of “PC” and “NC”, as appropriate.

TABLE DAIM-3-4-1

Provision of Terrain and Obstacle data sets for Areas 1 and 4

State	Terrain data sets		Obstacle data sets		Action Plan	Remarks
	Area 1	Area 4	Area 1	Area 4		
1	2	3	4	5	6	7

Table DAIM-3-4-2

Provision of Terrain and Obstacle data sets for Area 2, the take-off flight path area (TOFP) and the obstacle limitation surfaces (OLS)

EXPLANATION OF THE TABLE

Column

- | | |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Name of the State or territory for which Terrain and Obstacle data sets for Area 2 are required. |
| 2 | Compliance with requirement for the provision of Terrain data sets for Area 2a, shown by:
FC – Fully Compliant
PC – Partially Compliant
NC – Not Compliant |
| 3 | Compliance with requirement for the provision of Terrain data sets for Area 2b, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not implemented
N/A – Not Applicable |
| 4 | Compliance with requirement for the provision of Terrain data sets for Area 2c, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable |
| 5 | Compliance with requirement for the provision of Terrain data sets for Area 2d, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable |
| 6 | Compliance with requirement for the provision of Terrain data sets for the take-off flight path area (TOFP), shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable |
| 7 | Compliance with requirement for the provision of Terrain data sets for the obstacle limitation surfaces (OLS) shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable |
| 8 | Compliance with requirement for the provision of Obstacle data sets for Area 2a, shown by: |

FC – Fully Compliant
PC – Partially Compliant
NC – Not Compliant

- 9 Compliance with requirement for the provision of Obstacle data sets for Area 2b, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not implemented
N/A – Not Applicable
- 10 Compliance with requirement for the provision of Obstacle data sets for Area 2c, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 11 Compliance with requirement for the provision of Obstacle data sets for Area 2d, shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 12 Compliance with requirement for the provision of Obstacle data sets for the take-off flight path area (TOFP), shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 13 Compliance with requirement for the provision of Obstacle data sets for the obstacle limitation surfaces (OLS), shown by:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 14 Action plan — short description of the State’s Action Plan with regard to compliance with the requirements for provision of Terrain and Obstacle data sets for Area 2, especially for items with a “PC”, “PI”, “NC” or “NI” status.
- 15 Remarks— additional information, including detail of “PC”, “PI” and “NC”, “NI”, as appropriate.

TABLE DAIM-3-4-2

Provision of Terrain and Obstacle data sets for Area 2, the take-off flight path area (TOFP) and the obstacle limitation surfaces (OLS)

State	Terrain data sets						Obstacle data sets						Action Plan	Remarks
	Area 2a	Area 2b	Area 2c	Area 2d	TOFP	OLS	Area 2a	Area 2b	Area 2c	Area 2d	TOFP	OLS		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15

Table DAIM-3-4-3

Provision of Terrain and Obstacle data sets for Area 3 and Airport Mapping Databases (AMDB)

EXPLANATION OF THE TABLE

Column

- 1 Name of the State or territory for which Terrain and Obstacle data sets for Area 3 and AMDB are required.
- 2 Compliance with requirement for the provision of Terrain data sets for Area 3, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented
 - N/A – Not Applicable
- 3 Compliance with requirement for the provision of Obstacle data sets for Area 3, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented
 - N/A – Not Applicable
- 4 Implementation of AMDB, shown by:
 - FI – Fully Implemented
 - PI – Partially Implemented
 - NI – Not Implemented
 - N/A – Not Applicable
- 5 Action plan — short description of the State’s Action Plan with regard to compliance with the requirements for provision of Terrain and Obstacle data sets for Area 3 and AMDB implementation, especially for items with a “PC”, “PI”, “NC” or “NI” status.
- 6 Remarks— additional information, including detail of “PI” and “NI”, as appropriate.

TABLE DAIM-3-4-3

Provision of Terrain and Obstacle data sets for Area 3 and Airport Mapping Databases (AMDB)

State	Terrain data sets (Area 3)	Obstacle data sets (Area 3)	AMDB	Action Plan	Remarks
1	2	3	4	5	6

Table AMET 3-1

Meteorological observations products

EXPLANATION OF THE TABLE

Column

- 1 Name of the State
- 2 Status of implementation of Automatic Weather Observation System (AWOS) information, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 3 Status of implementation of Local reports (MET REPORT/SPECIAL), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 4 Status of implementation of Aerodrome reports (METAR/SPECI), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 5 Status of implementation of Lightning Information, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 6 Status of implementation of Ground-based weather radar information, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 7 Status of implementation of Meteorological satellite imagery, where:
FI – Fully Implemented

PI – Partially Implemented

NI – Not Implemented

N/A – Not Applicable

8 Status of implementation of Aircraft meteorological report (ie. ADS-B, AIREP, etc.), where:

FI – Fully Implemented

PI – Partially Implemented

NI – Not Implemented

N/A – Not Applicable

9 Status of implementation of Vertical wind and temperature profiles, where:

FI – Fully Implemented

PI – Partially Implemented

NI – Not Implemented

N/A – Not Applicable

10 Status of implementation of Wind shear alerts, where:

FI – Fully Implemented

PI – Partially Implemented

NI – Not Implemented

N/A – Not Applicable

11 Remarks

State	Implementation									Remarks
	AWOS	MET REPORT/SPECIAL	METAR/SPECI	Lightning Information	Ground-based weather radar information	Meteorological satellite imagery	Aircraft meteorological report	Vertical wind and temperature profiles	Wind shear alerts	
1	2	3	4	5	6	7	8	9	10	11

Table AMET 3-2

Meteorological forecast and warning products

EXPLANATION OF THE TABLE

Column

- 1 Name of the State
- 2 Status of implementation of World Area Forecast System (WAFS) gridded products, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 3 Status of implementation of Significant Weather (SIGWX), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 4 Status of implementation of Aerodrome Forecast (TAF), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 5 Status of implementation of Trend Forecast (TREND), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 6 Status of implementation of Take-off Forecast, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 7 Status of implementation of SIGMET, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 8 Status of implementation of Aerodrome Warning, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 9 Status of implementation of Wind Shear Warning, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
N/A – Not Applicable
- 10 Remarks

State	Implementation								Remarks
	WAFS	SIGWX	TAF	TREND	Take-off Forecast	SIGMET	Aerodrome Warning	Wind Shear Warning	
1	2	3	4	5	6	7	8	9	10

Table AMET 3-3

Climatological and historical meteorological Products

EXPLANATION OF THE TABLE

Column

- 1 Name of the State
- 2 Status of availability of Aerodrome climatological tables, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 3 Status of availability of Aerodrome climatological summaries, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 4 Remarks

State	Implementation		Remarks
	Aerodrome climatological tables;	Aerodrome climatological summaries	
1	2	3	4

Table AMET 3-4

Dissemination of meteorological products

Column

- 1 Name of the State
- 2 Dissemination of meteorological products using TAC, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 3 Dissemination of meteorological products using Gridded, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 4 Dissemination of meteorological products using Graphical, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 5 Dissemination of meteorological products using BUFR code, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 6 Dissemination of meteorological products using IWXXM (in XML/GML), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 7 Dissemination means includes AFTN, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 8 Dissemination means includes AMHS, where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 9 Dissemination means includes ssecure internet services (WIFS/SADIS), where:
FI – Fully Implemented
PI – Partially Implemented
NI – Not Implemented
- 10 Remarks

State	Dissemination of meteorological products							Remarks	
	Formats				Means				
1	(TAC) 2	(Gridded) 3	(Graphical) 4	(BUFR) 5	(IWXXM) 6	(AFTN) 7	(AMHS) 8	(WIFS/SADIS) 9	10
BAHRAIN	FI	FI	FI	FI	NI	FI	NI	FI	
EGYPT	FI	NI	NI	NI	NI	FI	NI	FI	
IRAN	FI	NI	FI	NI	NI	FI	NI	NI	

TABLE -APTA 3-1

EXPLANATION OF THE TABLE

Column	
1	Name of the State / International Aerodromes' Location Indicator
2	Runway Designator
3, 4, 5	Conventional Approaches (ILS / VOR or NDB)
6, 7, 8, 9	Elements of APTA B0/1 PBN Approaches with basic capabilities (Status of PBN Plan and implementation of LNAV, LNAV/VNAV), where: Y – Yes, implemented N – No, not implemented
10	PBN Runway: where any type of PBN approach is implemented
12, 15	Elements of APTA B0/2 PBN SID and STAR procedures (with basic capabilities) Y – Yes, implemented N – No, not implemented
11, 13	Elements of APTA B0/5 CCO basic (Status of implementation of CCO) per runway end and per aerodrome, where: Y – Yes, implemented N – No, not implemented
14, 16	Elements of APTA B0/4 CDO basic (Status of implementation of CDO) per runway end and per aerodrome, where: Y – Yes, implemented N – No, not implemented
17	Elements of APTA B0/7 Performance based aerodrome operating minima – Advanced aircraft (Compliance with the requirements for PB AOM) per State, where: FC – Fully compliant NC – Not compliant
18	Remarks

Int'l AD (Ref. MID ANP) (1)	RWY (2)	Conventional Approaches (3)		APTA (6)			PBN RWY (10)	CCO (11)				CDO (14)				PB AOM (17)	Remarks (18)
		Precision (4)	VOR or NDB (5)	PBN PLAN (7)	LNAV (8)	LNAV / VNAV (9)		RNAV SID (12)		CCO (13)		RNAV STAR (15)		CDO (16)		AOP (17)	
								xLS	CAT	Update date	RWY	AD	RWY	AD	RWY	AD	

ACAS Airborne Collision Avoidance System (ACAS)

Table ACAS 3-1

EXPLANATION OF THE TABLE

Column

- 1 Name of the State
- 2 Status of implementation:
Y – Fully Implemented
N – Not Implemented
- 3 National Regulation(s) Reference(s)
- 4 Remarks

State	Status	Regulation Reference	Effective Date	Remarks
1	2	3	4	5

Table ASUR 3-1

Surveillance Implementation Monitoring Table

EXPLANATION OF THE TABLE

Column

n

1 Name of the State / ATS Units where Radar service provided

2 Surveillance Gap

Y – Yes, non-radar covered area (GAP) exist

N – No, GAP areas not existed

3 Multi- Surveillance Data processing capability

Y – Yes, implemented

N – No, not implemented

4 Surveillance Sensor used

Y – Yes, implemented

N – No, not implemented

5 Dual Surveillance sources

Y – Yes, available

N – No, not available

6 Issuance of ADS-B Carriage Mandate

N – No, not issued

Date – effective date of ADS-B carriage mandate

Reference - link to mandate regulation

State/ ATS Units Served	Surveillance Gaps	Multi- Surveillance Data Processing Capability	Surveillance Sensor Used					Dual Surveillance Sources	ADS-B carriage mandate	
			PSR	SSR Mode A/C	SSR Mode S	MLAT	ADS- B		Data Sharing	Date
1	2	3	4					5	6	
State										

- END -