



International Civil Aviation Organization

MIDANPIRG/20 and RASG-MID/10 Meetings

(Muscat, Oman, 14-17 May 2023)

Agenda Item 6.6: CNS

AIDC/OLDI IMPLEMENTATION

(Presented by the Secretariat)

SUMMARY

This paper presents the outcome of the AIDC/OLDI Workshop and the status of FICE B0/1 implementation in the MID Region as well as proposing update to the MID Region AIDC/OLDI implementation Guidance to be reviewed and endorsed by the meeting.

Action by the meeting is at paragraph 3.

REFERENCES

- ICAO MID Air Navigation Plan Volume II
- CNS SG/12 Report (Amman, Jordan, 02 – 04 May 2023)
- Web-based MID AN report 2022
- AIDC/OLDI workshop report (Cairo, Egypt, 14 – 16 February 2023)

1. INTRODUCTION

1.1 The OLDI/AIDC module is aimed at improving the flow of traffic by allowing neighbouring ATS units to exchange flight data automatically in the form of coordination and transfer messages. The greater accuracy of messages based on the updated trajectory information contained in the system and where possible updated by surveillance data, controllers have more reliable information on the conditions at which aircraft will enter his/her AoR with a reduction of the workload associated to flight coordination and transfer. The increased accuracy and data integrity is the one of the elements permits the safe application of reduced separations.

1.2 It was recognized that the implementation of AIDC/OLDI would improve significantly the coordination process and would reduce the amount of coordination failures between ACCs, which has been identified as a major long-standing issue by MIDRMA Board. Consequently, the implementation of AIDC/OLDI would enhance safety and reduce ATC workload.

1.3 FICE B0/1 element represents a first automation step in the evolution of the coordination and transfer of control between neighbouring ATS units to guarantee that all related and necessary flight information will be available to the other unit as per agreement.

2. DISCUSSION

2.1 The meeting may wish to recall that the MSG/6 meeting agreed, through Conclusion 6/16, to include a requirement for AIDC/OLDI implementation (priority 1 interconnections) in the MID eANP Volume II Part IV-ATM, under Specific Regional Requirements. Nevertheless, the implementation level of the AIDC/OLDI in the MID Region is still far below the target. The average regional implementation level is 26% as at **Appendix A**. Lack of implementation of priority 1 interconnection will result in additional ANS deficiency to the MID Air Navigation Deficiency Database (MANDDD).

2.2 The CNS SG/12 meeting was informed that below AIDC/OLDI connections are being established among MID States and will be operational during the period of 2023-2024.

Bahrain – Saudi Arabia
Bahrain - Kuwait
Egypt – Jordan
Iraq - Turkey
Jordan – Saudi Arabia
Oman- Saudi Arabia
Saudi Arabia - UAE

2.3 The CNS SG/11 meeting noted the following challenges associated with AIDC/OLDI Implementation in some of the MID States and agreed that ICAO to organise a workshop on OLDI/AIDC to share experience and knowledge related to implementation of AIDC/OLDI as well as reviewing and updating the ICAO MID Doc 006- MID Region Guidance for the Implementation of AIDC/OLDI to be further reviewed and endorsed by MIDANPIRG/20:

- *No prior experience with OLDI/AIDC;*
- *System compatibility issues;*
- *OLDI version compatibility;*
- *Developing Concept of operation;*
- *Training ATCOs and ATCAs;*
- *Cyber Security*
- *availability of communication*

2.4 Based on all the above, AIDC/OLDI Workshop was conducted successfully jointly with ACAO and supported by EUROCONTROL in 14-16 February 2023, Cairo, Egypt. The Summary of Discussion is at **Appendix B**.

2.5 During the AIDC/OLDI Workshop, the ICAO MID Doc 006 MID Region Guidance for the implementation of AIDC/OLDI has been reviewed and updated as at **Appendix C**. The CNS SG/12 meeting reviewed and updated the Draft ICAO MID Doc 006, therefore, the following Draft Conclusion:

Why	To provide guidance on AIDC/OLDI implementation in the MID Region
What	Publish the revised version of the ICAO MID Doc 006
Who	ICAO MID Office
When	May 2023

DRAFT CONCLUSION 20/7: MID REGION GUIDANCE FOR THE IMPLEMENTATION OF AIDC/OLDI (ICAO MID Doc 006)

That, the revised version of the MID Region Guidance for the Implementation of AIDC/OLDI as at Appendix C is endorsed and be published by ICAO MID.

2.6 Furthermore, the workshop reviewed the operational requirements for the AIDC/OLDI applicability area in the MID Region (Priority 1 implementation) and proposed updates as in **Appendix D**.

2.7 The meeting may wish to recall that the ATN/IPS WG recommended that States that are interfacing with adjacent Regions may require to support and implement dual capabilities (AIDC and OLDI) and the selected protocol would be agreed upon bilaterally. The CNS SG/11 agreed that ICAO MID Office to coordinate with ICAO AFI Office to explore the possibility of agreement on a common inter-regional protocol and provide feedback to the CNS SG/13 and ATM SG/9 for further discussion.

3. ACTION BY THE MEETING


3.1 The meeting is invited to:

- a) urge States to implement AIDC/OLDI;
- b) review and update the Status of AIDC/OLDI implementation in the MID Region as at **Appendix A**;
- c) review the outcome of the AIDC/OLDI Workshop and propose action(s) as appropriate;
- d) review and update, as deem necessary, the MID Region Guidance for AIDC/OLDI Implementation in the MID Region (MID DOC 006) at **Appendix C**;
- e) review and amend, as appropriate, the proposed update to the AIDC/OLDI applicability area as at **Appendix D**;
- f) note the list of States which are subject to additional deficiency as per paragraph 2.1; and
- g) agree on the Draft Conclusion at Para. 2.4.

APPENDIX A

Status of AIDC/OLDI Implementation in the MID Region for 2022

State	AIDC/OLDI Capability	Required AIDC/OLDI Interconnections	AIDC/OLDI Implementation	Remarks	
<i>1</i>	<i>4</i>	<i>5*</i>	<i>6</i>	<i>7</i>	
Bahrain	Y	5	2	connection with ABU Dhabi	40%
Egypt	Y	4	1		25%
Iran	Y	4	0	Contract signed for AMHS	0
Iraq	N	2	0	Thales Topsky ATM system	0
Jordan	Y	2	0		0
Kuwait	Y	2	0		0
Lebanon	Y	1	0		0
Libya	Y	0	0	0Contract signed for AMHS	0
Oman	Y	4	1		25%
Qatar	Y	2	2	local implementation for OLDI	100%
Saudi Arabia	Y	7	2	local implementation for AIDC	14%
Sudan	Y	4	0		0
Syria	N	0	0		0
UAE	Y	4	3		75%
Yemen	N	0	0	Contract signed for AMHS	0
Total Percentage / Number	80%	42	11 (26%)		26%

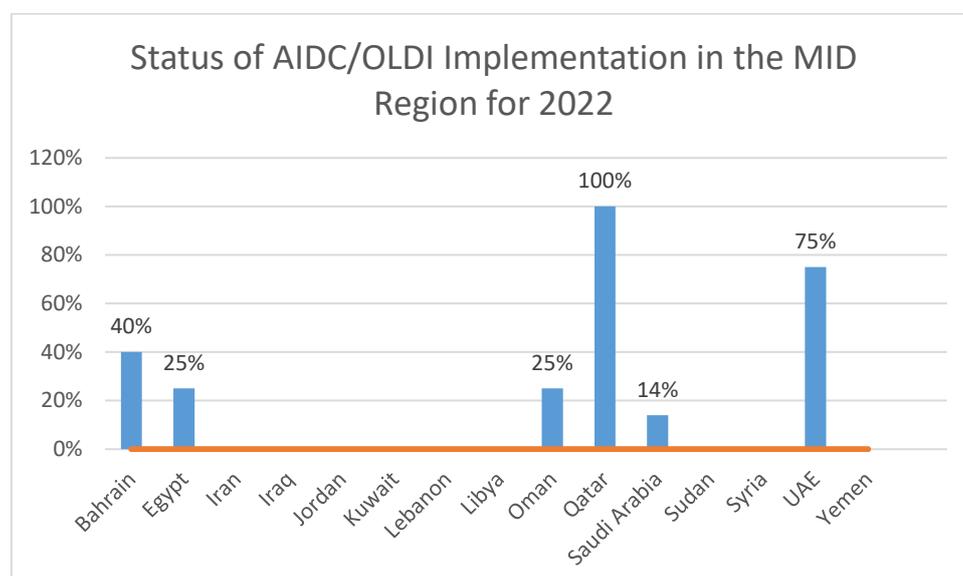

APPENDIX B



INTERNATIONAL CIVIL AVIATION ORGANIZATION

AIDC/OLDI WORKSHOP

(Cairo, Egypt 14-16 February 2023)

SUMMARY OF DISCUSSIONS

1. HISTORY OF THE WORKSHOP

1.1 The AIDC/OLDI Workshop was successfully conducted 14-16 February 2023 in Cairo, Egypt.

1.2 The Workshop was attended by (40) participants from (9) States (Egypt, Iraq, Jordan, Qatar, Saudi Arabia, UAE, Somalia and Tunisia) and four (4) Organizations (ACAO, EUROCONTROL, IATA, and ICAO).

2. AGENDA OF THE WORKSHOP

Agenda Item 1: ICAO provisions related to AIDC/OLDI

- ASBU FICE Thread
- MID AN Strategy
- MID AN Report 2022
- Operational advantages of using AIDC/OLDI over voice communication

Agenda Item 2: AIDC/OLDI Messages sets

- AIDC Messages Set
- OLDI Messages Set
- OLDI & AIDC Gap Analysis

Agenda Item 3: Technical and Operational requirements

- ATM Automation System supporting AIDC/OLDI
- Communication Requirements
- Testing and approval requirements
- Operational and Technical personnel training
- Performance Considerations

Agenda Item 4: Template for bilateral Letter of Agreement

Agenda Item 5: Review of the MID Region Strategy for the Implementation of AIDC/OLDI

3. SUMMARY OF DISCUSSIONS

- The Workshop was apprised of ICAO Provisions and regional activities related to the AIDC/OLDI;
- the Workshop noted the outcome of the CNS SG/10 related to the AIDC/OLDI;
- the Workshop recalled that the implementation level of AIDC/OLDI in the MID Region (21%) is still far below the target (70% by 2020) in accordance to the MID Region Air Navigation Strategy;
- the Workshop was apprised of the status of implementation of OLDI/AIDC in the some ACAO States.
- the Workshop was apprised of AIDC/OLDI performance benefits and its positive impact on ANS KPIs (Safety, Efficiency and predictability);
- the Workshop noted the 3 AIDC protocols utilized by FAA and ongoing expansion and enhancements;
- the Workshop was apprised of OLDI messages set and use cases that signify the operational process supported by OLDI coordination exchanges;
- the Workshop noted that the implementation of the basic set of OLDI messages has been mandated by law in EUROPE;
- the Workshop was apprised of AIDC/OLDI messages mapping and noted that the basic messages are identical in both protocols; however, OLDI can support Civil-Military coordination, datalink operation, crossing request and SKIP sector;
- the Workshop underlined that AIDC/OLDI messages exchange needs to be agreed bilaterally;
- the Workshop was apprised of the content of AIDC/OLDI letter of agreement (LoA) to include messages type, coordination, and time and distance parameters, 2 samples of LoAs were presented;
- the Workshop noted the performance requirements (availability, reliability, data security/integrity, operational evolution) for OLDI implementation;
- the Workshop noted the main systems affected by OLDI deployment;
- the Workshop reviewed the mechanism of identifying AIDC/OLDI applicability areas in the MID Region;
- the Workshop worked in 5 breakout groups and reviewed the MID Region Strategy for AIDC/OLDI implementation (ICAO MID DOC 006); the groups identified the required updates to be proposed to MIDANPIRG;
- the Workshop was apprised of the training requirements, it was noted that the automated exchanges of transfer and co-ordination data have substantial impact on ATC procedures and ATCO working methods. Therefore, an adequate familiarization training for ATCO needs to be ensured, however, ATSEPs need to be trained on how to maintain the equipment: OLDI communication facilities, flight data processing, OLDI front-end and any other equipment involved in reception / provision and handling of OLDI messages;
- the Workshop noted OLDI Monitoring tool developed by EUROCONTROL to yearly reflect the status of OLDI message deployment;
- the Workshop received updates from States (Egypt, Iraq, Qatar, Saudi Arabia, Tunisia and UAE) on the current status of AIDC/OLDI implementation, future plans, challenges and lessons learned; and
- the Workshop discussed the SL dated 29 December 2022 regarding the PfA on the initial implementation of the flight and flow — information for a collaborative environment (FF-ICE) services.

Recommendations:

- The Workshop recommended the use of AIDC/OLDI in congested airspace as it can cause a substantial increase in Capacity. The ATCO workload can be reduced compared with the conventional process (7-10 % increase of sector capacity figures based on EUROCONTROL);
- the use of standalone OLDI terminals where ATM automation System does not support OLDI would be an interim solution to enhance the ATSU's coordination;
- States were encouraged to use OLDI to better manage SSR codes by automatic allocation of SSR code from a centralised SSR pool;
- States were encouraged to use AIDC/OLDI exchanges to support the coordination and transfer process within the same FIR or with cross-border enroute, approach and TWR ATS unit;
- the Workshop recognized on the need to update ICAO MID AIDC/OLDI focal points list;
- radar data sharing is not directly linked with OLDI, but it will definitely improve the content of OLDI message. All OLDI messages contain the time over the coordination point; this time can be accurately calculated if the flight trajectory is regularly updated with surveillance report. Especially in big airspace volumes, the trajectory timing cannot be accurately calculated without adequate use of surveillance data. The Radar data sharing can improve the surveillance coverage and fill the gaps; thus, the sharing of radar data will substantially improve the content of OLDI messages;
- the Workshop proposed update to the MID Region AIDC/OLDI applicability areas to be reviewed and endorsed by the relevant groups;
- States need to develop a procedure to refer to voice communication in case of OLDI outage or message timeout as AIDC/OLDI exchanges critical data in terms of time delivery and response time;
- the Workshop encouraged States to use the EUROCONTROL OLDI messages Use Cases <https://www.eurocontrol.int/publication/eurocontrol-specification-line-data-interchange-oldi> during the test and acceptance phases;
- encouraged States to conduct change management process before implementing AIDC/OLDI including the system changes considering all the interfaces and their safety impact and mitigation measures.
- the Workshop agreed to establish an action group to update the ICAO MID Doc 006 taking into consideration inputs/comments received from the breakout groups to be presented to the CNS SG/11 (May, 2023, Amman, Jordan), the AG composed of:
 - a) Ahmed Abdelwahab (Egypt);
 - b) Yassir (Iraq);
 - c) Ibrahim Faraj (Jordan);
 - d) Saed (Saudi Arabia);
 - e) Hamda (UAE); and
 - f) Basel (UAE).



INTERNATIONAL CIVIL AVIATION ORGANIZATION

MIDDLE EAST AIR NAVIGATION PLANNING
AND IMPLEMENTATION REGIONAL GROUP
(MIDANPIRG)

MID REGION GUIDANCE FOR THE IMPLEMENTATION OF
AIDC/OLDI

EDITION ~~21-2~~
~~APRIL~~ MAY, 2023 ~~19~~

The designations employed and the presentation of material in this publication do not imply the expression of any opinion whatsoever on the part of ICAO concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontier or boundaries.

TABLE OF CONTENTS

1. Introduction:.....	5
2. Background and ASBU B0-FICE.....	6
3. ICAO General Assembly 38 WP-266:.....	151
4. Details of the ATM systems to support implementation	13
5. Message Types – Phase 1.....	16
6. D – Message Types – Phase 2.....	24
7. Test objectives	356
8. Sample Test Scripts and Flight plans	27
9. Bilateral Agreement Template	478
10. Implementation Phases	47

RECORD OF AMENDMENTS

The following table records the history of the successive editions of the present document:

Edition Number	Edition Date	Description	Pages Affected
0.1	03 February 2014	Initial version	All
0.2	09 September 2014	CNS SG/6 update	All
1.0	26 November 2014	MSG/4 endorsement	All
1.1	June 2015	Deletion of the planning parts and change of title of the Document. MIDANPIRG/15 endorsement.	All
1.2	April 2019	Update the table - Details of the ATM systems to support Implementation Table	13-15
<u>2.0</u>	<u>May 2023</u>	<u>Added Performance requirements and benefits, Training requirements, main Systems affected by OLDI implementation and mapping AIDC/OLDI messages sets</u> <u>Deleted Details of the ATM systems to support implementation table and Assembly WP</u>	

1. INTRODUCTION

1.1 Seeking to ensure continuous Safety improvement and Air Navigation modernization, the International Civil Aviation Organization (ICAO) has developed the strategic systems approach termed Aviation System Block Upgrade (ASBU). The latter, defines programmatic and flexible global systems, allows all States to advance their Air Navigation capacities based on their specific operational requirements.

1.2 The ASBU approach has four Blocks, namely Block 0, Block 1, Block 2 and Block 3. Each block is further divided into ~~Modules/Elements. Block 0 is composed of Modules containing technologies and capabilities that are implemented currently.~~

1.3 ~~Module Element AIDC is in FICE in Thread~~ Block 0 (FICE-B0/1). AIDC is introduced to improve coordination between air traffic service units (ATSUs) by using ATS inter-facility data communication (AIDC). The transfer of communication in a data link environment improves the efficiency of this process. The data link environment enhances capacity, efficiency, interoperability, safety and reduces cost.

1.4 The AIDC and the OLDI are tools to coordinate flight data between Air Traffic Service Units (ATSU) and both satisfies the requirements of basic coordination of flight notification, coordination and transfer of control.

1.5 Various items concerning MID Region Implementation of AIDC/OLDI have been detailed in this document.

2. BACKGROUND ~~AND on-ASBU B0-FICE B0/1 (AIDC)~~

Module B0-FICE: Increased Interoperability, Efficiency and Capacity through Ground-Ground Integration:

Summary	To improve coordination between air traffic service units (ATSUs) by using ATS interfacility data communication (AIDC) defined by the ICAO <i>Manual of Air Traffic Services Data Link Applications</i> (Doc 9694). The transfer of communication in a data link environment improves the efficiency of this process particularly for oceanic ATSUs.	
Main performance impact as per Doc 9883	KPA-02—Capacity, KPA-04—Efficiency, KPA-07—Global Interoperability, KPA-10—Safety.	
Operating environment/ Phases of flight	All flight phases and all type of ATS units.	
Applicability considerations	Applicable to at least two area control centres (ACCs) dealing with en-route and/or terminal control area (TMA) airspace. A greater number of consecutive participating ACCs will increase the benefits.	
Global concept component(s) as per Doc 9854	CM—conflict management	
Global plan initiatives (GPI)	GPI-16: Decision support systems	
Main dependencies	Linkage with B0-TBO	
Global readiness checklist		Status (ready now or estimated date)
	Standards readiness	∟
	Avionics availability	No requirement
	Ground systems availability	∟
	Procedures available	∟
	Operations approvals	∟

2.1 General

2.1.1 Flights which are being provided with air traffic services are transferred from one air traffic services (ATS) unit to the next in a manner designed to ensure safety. In order to accomplish this objective, it is a standard procedure that the passage of each flight across the boundary of the areas of responsibility of the two units is co-ordinated between them beforehand and that the control of the flight is transferred when it is at, or adjacent to, the said boundary.

2.1.2 Where it is carried out by telephone, the passing of data on individual flights as part of the coordination process is a major support task at ATS units, particularly at area control centres (ACCs). The operational use of connections between flight data processing systems (FDPSs) at ACCs replacing phone coordination (on-line data interchange (OLDI)) is already proven in ~~Europe several MID States.~~

2.1.3 This is now fully integrated into the ATS interfacility data communications (AIDC) messages in the *Procedures for Air Navigation Services — Air Traffic Management*, (PANS-ATM, Doc 4444) which describes the types of messages and their contents to be used for operational communications between ATS unit computer systems. This type of data transfer (AIDC) will be the basis for migration of data communications to the aeronautical telecommunication network (ATN).

2.1.4 The AIDC module is aimed at improving the flow of traffic by allowing neighboring air traffic services units to exchange flight data automatically in the form of coordination and transfer messages.

2.1.5 With the greater accuracy of messages based on the updated trajectory information contained in the system and where possible updated by surveillance data, controllers have more reliable information on the conditions at which aircraft will enter in their airspace of jurisdiction with a reduction of the workload associated to flight coordination and transfer. The increased accuracy and data integrity permits the safe application of reduced separations.

2.1.6 Combined with air-ground data link applications, AIDC also allows the transfer of aircraft logon information and the timely initiation of establishing controller-pilot data link communications (CPDLC) by the next air traffic control (ATC) unit with the aircraft.

2.1.7 These improvements outlined above translate directly into a combination of performance improvements.

2.1.8 Information exchanges between flight data processing systems are established between air traffic services units for the purpose of notification, coordination and transfer of flights and for the purpose of civil/military coordination. These information exchanges rely upon appropriate and harmonized communication protocols to secure their interoperability.

2.1.9 Information exchanges apply to:

- a) communication systems supporting the coordination procedures between air traffic services units using a peer-to-peer communication mechanism and providing services to general air traffic; and
- b) communication systems supporting the coordination procedures between air traffic services units and controlling military units, using a peer-to-peer communication mechanism.

Baseline

2.1.10 The baseline for this module is the traditional coordination by phone, and procedural and/or radar distance/time separations.

Change brought by the module

~~2.1.11 The module makes available a set of messages to describe consistent transfer conditions via electronic means across ATS units' boundaries. It consists of the implementation of the set of AIDC messages in the flight data processing systems (FDPS) of the different ATS units involved and the establishment of a Letter of Agreement (LoA) between these units to set the appropriate parameters.~~

~~2.1.12 Prerequisites for the module, generally available before its implementation, are an ATC system with flight data processing functionality and a surveillance data processing system connected to each other.~~

Other remarks

~~2.1.13 This module is a first step towards the more sophisticated 4D trajectory exchanges between both ground/ground and air/ground according to the ICAO Global Air Traffic Management Operational Concept (Doc 9854).~~

2.2 Intended Performance Operational Improvement

2.2.1 Metrics to determine the success of the module Element are proposed in the *Manual on Global Performance of the Air Navigation System* (Doc 9883).

Capacity	Reduced controller workload and increased data integrity supporting reduced separations translating directly to cross sector or boundary capacity flow increases.
Efficiency	The reduced separation can also be used to more frequently offer aircraft flight levels closer to the flight optimum; in certain cases, this also translates into reduced en-route holding.
Global interoperability	Seamlessness: the use of standardized interfaces reduces the cost of development, allows air traffic controllers to apply the same procedures at the boundaries of all participating centres and border crossing becomes more transparent to flights.
Safety	Better knowledge of more accurate flight plan information.
Cost Benefit Analysis	Increase of throughput at ATS unit boundary and reduced ATCO workload will outweigh the cost of FDPS software changes. The business case is dependent on the environment.

2.3 Necessary Procedures (Air and Ground)

2.3.1 Required procedures exist. They need local analysis of the specific flows and should be spelled out in a Letter of Agreement between ATS units; the experience from other Regions can be a useful reference.

2.4 Necessary System Capability

Avionics

2.4.1 No specific airborne requirements.

Ground systems

2.4.2 Upgrade the ground system to support the composition, exchange and processing of messages set either AIDC or/and OLDI ~~Technology is available. It consists in implementing the relevant set of AIDC messages in flight data processing and could use the ground network standard AFTN-AMHS or ATN. Europe is presently implementing it in ADEXP format over IP-wide area networks.~~ Connectivity between ATSU systems through IP, AMHS, etc

2.4.3 The technology also includes for oceanic ATSUs a function supporting transfer of communication via data link.

2.5 Human Performance

Human Factors Considerations

2.5.1 Ground interoperability reduces voice exchange between ATCOs and decreases workload. A system supporting appropriate human-machine interface (HMI) for ATCOs is required.

2.5.2 Human factors have been taken into consideration during the development of the processes and procedures associated with this module. Where automation is to be used, the HMI has been considered from both a functional and ergonomic perspective (see Section 6 for examples). The possibility of latent failures, however, continues to exist and vigilance is required during all implementation activity. In addition it is important that human factor issues, identified during implementation, be reported to the international community through ICAO as part of any safety reporting initiative.

Training and Qualification Requirements

2.5.3 To make the most of the automation support, training in the operational standards and procedures will be required and can be found in the links to the documents in Section 8 to this module. Likewise, the qualifications requirements are identified in the regulatory requirements in Section 6 which are integral to the implementation of this module.

2.6 Regulatory/Standardization Needs and Approval Plan (Air and Ground)

- Regulatory/standardization: use current published criteria that include:
 - a) ICAO Doc 4444, *Procedures for Air Navigation Services — Air Traffic Management*;
 - b) EU Regulation, EC No 552/2004.
- CAA may need to amend the national regulatory provisions on the use of AIDC. References: PANS-ATM (ICAO Doc 4444) and Regional Interface Control (ICD) documents. Approval plans: to be determined based on regional consideration of ATS interfacility data communications (AIDC).
 - Apply Safety Management System in accordance with the national requirements and guidance.

Formatted: Bulleted + Level: 1 + Aligned at: 0.75" + Indent at: 1"

2.7 Implementation and Demonstration Activities (As known at time of writing)

2.7.1 ~~Although already implemented in several areas, there is a need to complete the existing SARPs to improve harmonization and interoperability. For Oceanic data link application, North Atlantic (NAT) and Asia and Pacific (APAC) (cf ISPACG PT/8-WP.02-GOLD) have defined some common coordination procedures and messages between oceanic centres for data link application (ADS-C CPDLC).~~

2.7.2 Current use

- MID Region: MIDANPIRG classified the implementation of AIDC connections in the

Formatted: Font: Bold, Complex Script Font: Bold

MID Region into two priorities based on traffic volume and operational needs. Priority-one connections are mandated to be implemented as per the ATM-Specific requirements in the MID Air Navigation Plan, Volume II.

- **Europe:** It is mandatory for exchange between ATS units.
http://europa.eu/legislation_summaries/transport/air_transport/124070en.htm

The European Commission has issued a mandate on the interoperability of the European air traffic management network, concerning the coordination and transfer (COTR) between ATS units through REG EC 1032/2006 and the exchange of flight data between ATS units in support of air-ground data link through REG EC 30/2009. This is based on the standard OLDI-Ed 4.2 and ADEXP-Ed 3.1.

- **EUROCONTROL:** Specification of interoperability and performance requirements for the flight message transfer protocol (FMTP). The available set of messages to describe and negotiate consistent transfer conditions via electronic means across centres' boundaries have been used for trials in Europe in 2010 within the scope of EUROCONTROL's FASTI initiative.
- **India:** AIDC implementation is in progress in Indian airspace for improved coordination between ATC centres. Major Indian airports and ATC centres have integrated ATS automation systems having AIDC capability. AIDC functionality is operational between Mumbai and Chennai ACCs. AIDC will be implemented within India by 2012. AIDC trials are underway between Mumbai and Karachi (Pakistan) and are planned between India and Muscat in coordination with Oman.
- **AIDC:** is in use in the Asia-Pacific Region, Australia, New-Zealand, Indonesia and others.

2.7.3 ~~Planned or Ongoing Activities~~

~~To be determined.~~

2.7.4 ~~Currently in Operation~~

~~To be determined.~~

Formatted: Space After: 11.1 pt

Formatted: CM12, Space After: 11.1 pt, Line spacing: At least 12.65 pt

2.8 Reference Documents

2.8.1 Standards

- ICAO Doc 4444, *Procedures for Air Navigation Services - Air Traffic Management, Appendix 6 - ATS Interfacility Data Communications (AIDC) Messages.*
- ICAO Doc 9880, *Manual on Detailed Technical Specifications for the Aeronautical Telecommunication Network (ATN) using ISO/OSI Standards and Protocols, Part II — Ground-Ground Applications — Air Traffic Services Message Handling Services (ATSMHS).*

2.8.2 ~~Procedures~~

~~To be determined.~~

2.8.3 Guidance material

- ICAO Doc 9694, Manual of Air Traffic Services Data Link Applications; Part 6;
- GOLD Global Operational Data Link Document (APANPIRG, NAT SPG), June 2010;
- Pan Regional Interface Control Document for Oceanic ATS Interfacility Data.

Communications (PAN ICD) Coordination Draft Version 0.3. 31 August 2010;

□ Asia/Pacific Regional Interface Control Document (ICD) for ATS Interfacility Data Communications (AIDC) available at http://www.bangkok.icao.int/edocs/icd_aidc_ver3.pdf, ICAO Asia/Pacific Regional Office.

□ EUROCONTROL Standard for On-Line Data Interchange (OLDI); and EUROCONTROL Standard for ATS Data Exchange Presentation (ADEXP).

~~ASSEMBLY — 38TH SESSION — A38-WP/266.~~

2.9 Performance benefits

- The OLDI exchanges mean the provision / reception of ATC coordination and transfer data in an automated way replacing the verbal coordination and transfer.
- The benefits of these automated exchanges can be several folds as:
 - Substantial increase in **Capacity**, because of ATCO workload reduction compared with the conventional process without an automated support. If the phone coordination is replaced by an automated one, the ATCO workload is reduced providing a means to increase the sector entry rates and accept more traffic within the sector, increasing the ATCO productivity.
 - The implementation of OLDI basic and advance features led in many cases to 7-10 % increase of sector capacity figures, therefore OLDI is considered as one of main booster for capacity increase.
 - The automation of coordination and transfer exchanges will slightly improve **Safety** due to the automation and reduction of human errors induced by verbal coordination and transfer.
 - The **Operational Efficiency** will increase by enabling more efficient planning and operational decision making.
 - The traffic **Predictability** will be slight improved as adjacent ATS units will share the same information about the flight, therefore it is less needed to add buffers. Knowing in advance where aircraft will be and at what time will allow capacity to match demand, reducing penalties.
 - The benefits of OLDI come from having a method to share the operational flight data information between adjacent ATS units each time there is an update. The impacted ANSPs can use this up-to-date information to calculate their trajectory predictions. As these predictions will be more accurate, i.e. with a narrower range of uncertainty, there might be some improvements in the performance of conflict detection tools (MTCD).

- OLDI provides more dialogue functionalities and more flexibility in the way flights are exchanged across centres (e.g., SKIP functionality).

2.10 OLDI Performance requirements

2.10.1 Availability

- In principle, the OLDI facility needs be available 24 hours every day, but especially during the hours of normal and peak traffic flows between the two units concerned. Any scheduled down-time periods (and thus the planned availability time) needs be bilaterally agreed between the two units concerned.

2.10.2 Reliability

- Reliability on every OLDI link shall be at least 99.86 % (equivalent to a down-time of not more than 12 hours per year based on 24-hour availability).
- Where operationally justified, a reliability of at least 99.99% (equivalent to a down-time of not more than 52 minutes per year, based on 24 Hour availability) should be provided.

2.10.3 Data security / integrity

- Data security methods (e.g., access rights, source verification) and, where applicable, network management should be applied to OLDI facilities. The failure rate at application level shall be less than or equal to one transmission error per 2000 messages.

2.10.4 Operational evaluation

- Each new OLDI facility, including a new facility on an existing link, shall be subject to an evaluation period to verify the data integrity, accuracy, performance, compatibility with ATC procedures and overall safety prior to its operational implementation.
- 2.10.5 The OLDI transaction times specified include transmission, initial processing at the receiving / accepting unit, creation of the acknowledgement message, its transmission and reception at the transferring unit. The maximum transaction times for the OLDI messages in 90% of cases need to be below 4 seconds, while for 99.8% of cases should not below 10 seconds.
- If no acknowledgement has been received within the specified time after transmission, a message shall be considered to have been unsuccessfully transmitted or processed and a warning output. The OLDI message response time in the generation and reception phases shall not exceed 2 seconds.
- A time-out value addresses the case of no reception of LAM. If no acknowledgement has been received within the specified time after transmission:
 - a message needs to be considered to have been **unsuccessfully transmitted or processed** and
 - a **warning output** as specified in the specification for each process.

Formatted: Indent: Before: 1", No bullets or numbering, Tab stops: 1", Left

Formatted: Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 10 + Alignment: Left + Aligned at: 0" + Indent at: 0.27"

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: No bullets or numbering

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 2 + Alignment: Left + Aligned at: 0" + Indent at: 0.5"

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Outline numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 2 + Alignment: Left + Aligned at: 0" + Indent at: 0.5"

Formatted: No bullets or numbering

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

- Usual time-out values are between 15-30 seconds, depending on bilateral agreements for the exchanges of OLDI messages.

2.11 Main systems affected by OLDI deployment

- OLDI exchanges might be used to support the coordination and transfer process with adjacent ACC / APP / TWR units within the same FIR or with cross-border enroute, approach and TWR ATS unit.
- The main affected system is the Flight Data Processing System (FDPS). The FDPS needs to be capable of performing OLDI communication with up to predefined number of external / internal co-ordination partners. The FDPS shall be capable of sending and receiving defined set of OLDI messages in ICAO/ADEXP format, including RVSM and 8.33khz fields.
- As an integral part of each system flight plan (SFPL), the FDPS needs to maintain a copy of all OLDI messages which have been correlated to the SFPL.
- The FDPS needs to be sufficiently flexible in the selection of items to be used in the sending of OLDI messages with an external ATS unit, per COP and next ATS Unit. The FDPS shall permit the configuration of messages and parameters as defined in the EUROCONTROL OLDI specification for coordination with each external partner and optionally per COP.

The system also needs to check the syntax and semantics of received OLDI messages and return LAM if the are OK. The received OLDI messages will be used to update the trajectory or trajectory elements of the concerned flight.

The exchanged OLDI messages need to be presented on the Controller Working Position (CWP) with an adequate interface (HMI). The OLDI messages need to be presented in the track label or different flight lists to support the inter-sector co-ordination and full OLDI / OLDI dialogue co-ordination. The OLDI data needs to be presented in the track label, extended track label and corresponding FP lists and co-ordination windows.

The CWP functionalities need to support the co-ordination with adjacent ATS units with OLDI links as well as co-ordination between ARS unit without OLDI. The CWP needs to indicate that the transmission of the OLDI message is in progress or has been successfully transmitted as appropriate. The HMI at ATC positions using OLDI needs to provide a warning if the OLDI facility is not available.

The CWP needs remind the operator to use the telephone in order to perform the co-ordination data exchange with adjacent ATS units when the following events happen:

- the LAM message does not arrive within the parameter time (time out) indicating that the other sector might not have received the OLDI message
- there is a general fault in the OLDI communication / application;
- OLDI message (REV) is not supported;
- Exceeding time parameters for OLDI messages exchanges (REV/RRV).

The FDPS / CWP needs to provide a mechanism by which an estimate can be rapidly entered for a flight for which automatic notification is not available (e.g., no OLDI link with upstream ATSU);

Formatted: Indent: Before: 0.5", No bullets or numbering

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Font: Not Bold, Complex Script Font: Not Bold

Formatted: Tab stops: Not at 1"

Formatted: Indent: Before: 0.5", No bullets or numbering

The ATC supervisor needs to monitor the availability of OLDI links;

- The Flight Data Assistant (FDA) positions need to be equipped with capability for reception and handling of incorrect OLDI messages, as well as handling of incoming and outgoing verbal coordination with adjacent ATS units not equipped with OLDI facilities (or failed OLDI link) and inserting verbal co-ordination data in the system

The reminder (part of ATC toolkit) for manual co-ordination is derived from the relevant Letters of Agreement (LoA) or Standard Operating Procedures (SOP). This reminder is used in case the OLDI functionality is not available. Additional reminders as change of frequency and potential co-ordination failure are also needed.

The OLDI links and functionality need to be monitored and controlled by Technical Monitoring and Control System (TMCS). LOF / NAN OLDI messages are used for air-ground data link applications. OLDI also affects the Recording and Reply System (RRS) as all OLDI messages entering / leaving the system need to be recorded.

•

2.11 Training requirements

The automated exchanges of transfer and co-ordination data have substantial impact on ATC procedures and ATCO working methods. Therefore, an adequate familiarisation training for ATCO needs to be ensured. This training could be part with the overall training for the introduction of a new system or could be handled as special refreshment training on OLDI topics.

The ATC Coordination and Transfer is part of the ATCO Common Core Content (CCC). Therefore, OLDI as a means to achieve the automation of this process needs to be carefully addressed. The Flight Data Assistant needs to be trained as well on the OLDI topics and how to handle the correction of wrong OLDI messages.

ATSEPs also need to be trained on how to maintain the equipment: OLDI communication facilities, flight data processing, OLDI front-end and any other equipment involved in reception / provision and handling of OLDI messages. Usually all these training session are organised by the System Manufacturers who got a contract for the provision of a new or the upgrade of a existing ATC system.

Formatted: Indent: Before: 0.5", No bullets or numbering

Formatted: English (United States)

Formatted: Outline numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 10 + Alignment: Left + Aligned at: 0" + Indent at: 0.39"

Formatted: Indent: Before: 0.39", No bullets or numbering

Formatted: Font: (Default) +Headings CS (Times New Roman), Underline, Complex Script Font: +Headings CS (Times New Roman)

Formatted: Font: (Default) +Headings CS (Times New Roman), Underline, Complex Script Font: +Headings CS (Times New Roman)

Formatted: Indent: Before: 0.39", No bullets or numbering

Formatted: Indent: Before: 0.39"

3. ICAO GENERAL ASSEMBLY 38 WP 266



International Civil Aviation Organization

WORKING PAPER

ASSEMBLY 38TH SESSION

TECHNICAL COMMISSION

Agenda Item 33: Air Navigation Standardization

OLDI as AIDC realisation in the MID Region

(Presented by the United Arab Emirates)

EXECUTIVE SUMMARY

A38 WP 266

TE/120

12/09/13

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tab stops: Not at 0.5" + 1" + 1.25" + 1.5" + 1.75" + 2"

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~The Aviation System Block Upgrade (ASBU) B0-25 recommends “increased interoperability, efficiency and capacity through ground-ground integration”. To this end ATS inter-facility data communication (AIDC) is presumed by many States. The EUROCONTROL uses a different tool called On-Line Data Interchange (OLDI) satisfying all AIDC requirements.~~

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~The AIDC and the OLDI are tools to coordinate flight data between Air Traffic Service Units (ATSU) and both satisfies the basic coordination of flight notification, coordination and transfer of control.~~

~~Additional options like pre-departure coordination, Civil-Military coordination and air-ground data link for forwarding log-on parameters are available in the OLDI.~~

~~The majority of States in the MID Region has either implemented or is planning to implement OLDI and have no intention of using only AIDC.~~

~~**Action:** The Assembly is invited to:~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~a) Recommend that OLDI implementation be accepted as MID regional variation of AIDC implementation.~~

~~b) Urge States to capitalise opportunities provided by OLDI and wherever both AIDC and OLDI are implemented, choose the suitable option satisfying the requirements of the partnering States.~~

Formatted: CM12, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~*Strategic Objectives:*~~

~~This working paper relates to Strategic Objective B~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~*Financial implications:*~~

~~Not applicable~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~*References:*~~

- ~~1. Manual of Air Traffic Services Data Link Applications (Doc 9694)~~
- ~~2. MID Region ATN-IPS WG5 meeting report,~~
- ~~3. MID Region ATN-IPS WG5 WP4 Appendix A~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

~~1. INTRODUCTION~~

~~1.1 Seeking to ensure continuous Safety improvement and Air Navigation modernization, the International Civil Aviation Organization (ICAO) has developed the strategic systems approach termed Aviation System Block Upgrade (ASBU). The latter, which defines programmatic and flexible global systems, allows all States to advance their Air Navigation capacities based on their specific operational requirements.~~

Formatted: CM12, Space Before: 0 pt, After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Tab stops: Not at 1"

~~1.2 The ASBU approach has four Blocks, namely Block 0, Block 1, Block 2 and Block 3. Each block is further divided into Modules. Block 0 is composed of Modules containing technologies and capabilities that are implemented to date.~~

~~1.3 Module 25 in Block 0 is introduced to improve coordination between air traffic service units (ATSUs) by using ATS inter facility data communication (AIDC). The transfer of communication in a data link environment improves the efficiency of this process. The data link environment enhances capacity, efficiency, interoperability, safety and reduces cost.~~

~~2. DISCUSSION~~

~~2.1 EUROCONTROL uses a different tool called On Line Data Interchange (OLDI) satisfying all AIDC requirements. The AIDC and the OLDI are tools to coordinate flight data between Air Traffic Service Units (ATSU) and both satisfies the basic coordination of flight notification, coordination and transfer of control. Additional options like pre-departure coordination, Civil Military coordination and air-ground data link for forwarding log-on parameters are available in the OLDI.~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: CM12, Space Before: 0 pt, After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Tab stops: Not at 1"

~~2.2 The OLDI is a proven technology and is in operational use for more than twenty years in the European Region and for more than four years in the United Arab Emirates. This technology meets all the AIDC requirements and is kept up to date to cope with the new developments in the industry. An example is the release of OLDI version 4.2 to accommodate INFPL requirements.~~

~~2.3 Based on the analysis carried out during the MID Region ATN IPS WG5 meeting it was noted that the majority of States in the MID Region have either implemented OLDI or are planning to implement OLDI and have no intention of using only AIDC. Therefore, the meeting agreed that OLDI implementation should be considered and accepted as Regional variation of AIDC implementation as was the case in the European Region.~~

~~2.4 The MID Region ATN IPS WG5 meeting further agreed that if both AIDC and OLDI are implemented, then it will be a bilateral issue and some States that are interfacing with adjacent Regions may require to support and implement dual capabilities (AIDC and OLDI).~~

~~2.5 The MID Region is monitoring the work of the joint taskforce harmonization of AIDC and OLDI in NAT and ASIA PAC as it is important to harmonize AIDC and OLDI in order that States in the interface areas have smooth operations.~~

~~3. CONCLUSION~~

Formatted: CM12, Justified, Space After: 10.95 pt, Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

~~4. 3.1 The implementation of OLDI in the MID Region should be accepted as variation AIDC implementation. Wherever both AIDC and OLDI are implemented then States should choose the suitable one satisfying the requirements of the partnering State.~~

3. AIDC & OLDI Messages Mapping

- The initial mapping is contained in ICAO Manual 9694. The mapping in below table is more focused on OLDI and their AIDC equivalents.

<u>OLDI Message</u>	<u>AIDC equivalent</u>
<u>ABI</u>	<u>Notify</u>
<u>ACT</u>	<u>CoordinateInitial</u>
<u>PAC</u>	<u>CoordinateInitial</u>
<u>RAP</u>	<u>CoordinateNegotiate</u>
<u>ACP</u>	<u>CoordinateAccept</u>
<u>RJC</u>	<u>CoordinateReject</u>
<u>REV</u>	<u>CoordinateUpdate</u>
<u>RRV</u>	<u>CoordinateUpdate</u>
<u>CDN</u>	<u>CoordinateUpdate also reply to CoordinateNegotiate</u>
<u>MAC</u>	<u>CoordinateCancel</u>
<u>SBY</u>	<u>CoordinateStandby</u>
<u>LAM</u>	<u>AppAccept</u>
<u>TIM</u>	<u>TransferInitiate</u>

Formatted: Indent: Before: 0.25", No bullets or numbering

Formatted Table

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Not Bold, Font color: Black, Complex Script Font: Times New Roman, 12 pt, Not Bold

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

<u>HOP</u>	<u>TransferConditionsProposal</u>
<u>MAS</u>	<u>TransferCommAssume</u>
<u>ROF</u>	<u>TransferRequest and</u> <u>TransferConditionsAccept</u>
<u>COF</u>	<u>TransferComm</u>
<u>SDM</u>	<u>GeneralExecData</u>
<u>TIP</u>	<u>No</u>
<u>RTI</u>	<u>No</u>
<u>SKC</u>	<u>No</u>
<u>SKO</u>	<u>No</u>
<u>RRQ</u>	<u>No</u>
<u>RLS</u>	<u>No</u>
<u>CRQ</u>	<u>No</u>
<u>CRP</u>	<u>No</u>
<u>INF</u>	<u>No</u>
<u>PNT</u>	<u>GeneralPoint</u>
<u>COD</u>	<u>No</u>
<u>AMA</u>	<u>No</u>

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt, English (United States)

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: English (United States)

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: Font: (Default) Times New Roman, 12 pt, Font color: Black, Complex Script Font: Times New Roman, 12 pt

Formatted: English (United States)

Formatted

Formatted

Formatted: English (United States)

<u>LOF</u>	<u>No</u>
<u>NAN</u>	<u>No</u>
<u>BFD</u>	<u>No</u>
<u>CFD</u>	<u>No</u>
<u>TFD</u>	<u>No</u>
<u>XIN</u>	<u>No</u>
<u>XRQ</u>	<u>No</u>
<u>XAP</u>	<u>No</u>
<u>XCM</u>	<u>No</u>
<u>Not specifically addressed, but it is a part of processes supported by ACT / RAP. The reception of ACT / RAP or REV/RRV cause the update of flight trajectory</u>	<u>CoordinateReady</u>
<u>Not specifically addressed, but it is a part of processes supported by ACT / RAP. The reception of ACT / RAP or REV/RRV cause the update of flight trajectory</u>	<u>CoordinateCommit</u>
<u>Not specifically addressed, but it is a part of processes supported by RAP, RRV and RJC. If the coordination is rejected</u>	<u>CoordinateRollback</u>

<u>the previous agreed coordination remains in place</u>	
<u>Not supported, all OLDI fields are structured</u>	<u>FreetextEmergency</u>
<u>Not supported, all OLDI fields are structured</u>	<u>FreetextGeneral</u>
<u>Not specifically addressed, but it is a part of processes supported by COF, as transfer of control coincide with change of frequency</u>	<u>TransferControl</u>
<u>Not specifically addressed, but it is a part of processes supported by MAS, the assumption coincide with MAS</u>	<u>TransferControlAssume</u>
<u>No, very specific for AIDC</u>	<u>AppStatus</u>
<u>No, very specific for AIDC</u>	<u>AppError</u>

Formatted: Font: (Default) Times New Roman, Complex Script Font: Times New Roman, English (United States)

Formatted: Default, Left, Indent: Before: 0.25", Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

5. DETAILS OF THE ATM SYSTEMS TO SUPPORT IMPLEMENTATION

Country	ATM System	Protocol and Version used	Number of Agent ATSU's	Number of Agent ATSU's connected by DC/OLDI Type of connection	ATM System capability		Current use		Planned Use		Attention of AIDC only	Reasons and Remarks
					DC	DI	DC	DI	DC	DI		
Ukraine	TopSky-C	DI-2.3 TP-2.0		OLDI								DI implemented with UAE DI with Doha is in progress
Ukraine	PSKY (TALES) Support X25 Protocol only	DI-V4.2 DC 2.0		OLDI								OLDI is implemented with EUR (Athens) OLDI with Nicosia is in progress DC over AFTN is planned with Jeddah and Beirut
Ukraine	TopSky	DI		Old								DI messages are sent to Ankara
Ukraine	TopSky	DI		Old								DI planned with Kuwait and Ankara
Ukraine	TopSky-2100 RA	DI-4.1 DC-2.0		Old								Planned with Jeddah and Egypt
Ukraine	TopSky-2100 RA	DI-v4.2 DC-v3.0		Old								DI to connect to Ukraine and Riyadh

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Widow/Orphan control, No page break before

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

anon				LDI with rus						DI with Cyprus is in progress med-OLDI with Syria	
ya	eon 2000 fa	DI 2.3 OC 2.0		ae						DC planned with Egypt, DI planned with Tunis and Malta (20)	
an	fa-tee	DI 4.1 OC 2.3		LDI						DI connection to UAE DI planned with Jeddah OC with Mumbai in progress OC planned with Karachi	
tar	ex	DI V4.2 TP 2.0 OC 2.0								DI in use with UAE and planned for use h Bahrain	
di Arabia	ORA	DI V4.2 OC V3.0 TP V4 &		one (Eurocat X) OC Connected ween Riyadh Jeddah						DI planned for 2020/2021	
lan	sky	DI 4.3 OC 2.0								h AIDC and OLDI to cater to neighbouring ts requests	
Syria				e							
E	ISMA from MSOFT	DI V4.2 TP 2.0		two-way egrated OLDI nections						DI already in use with 7 partners and all ghbouring ATSUs are OLDI capable	

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: English (United States)
Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Widow/Orphan control

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: List Paragraph, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Widow/Orphan control, Tab stops: Not at 0.3"

Formatted: List Paragraph, Left, Indent: Before: -0.25", First line: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25", Widow/Orphan control

6.4. MESSAGE TYPES – PHASE 1

These are the messages that were agreed to be used in ICAO MID Region:

I. Basic Procedure Messages

1. Advance Boundary Information	ABI
2. Activate	ACT
3. Revision	REV
4. Preliminary Activation	PAC
5. Abrogation of Co-ordination	MAC
6. SSR Code Assignment	COD
7. Arrival Management	AMA
8. Logical Acknowledgement Message	LAM
9. Information Message	INF

II. Advance Boundary Information **ABI**

1. Purpose of the ABI Message

The ABI message satisfies the following operational requirements:

- Provide for acquisition of missing flight plan data;
- Provide advance boundary information and revisions thereto for the next ATC unit;
- Update the basic flight plan data;
- Facilitate early correlation of radar tracks;
- Facilitate accurate short-term sector load assessment;
- Request the assignment of an SSR code from the unit to which the above notification is sent, if required.

The ABI is a notification message.

2. Message Contents

The ABI message shall contain the following items of data:

- Message Type;
- Message Number;
- Aircraft Identification;
- SSR Mode and Code (if available);
- Departure Aerodrome;
- Estimate Data;
- Destination Aerodrome;
- Number and Type of Aircraft;
- Type of Flight;
- Equipment Capability and Status.

If bilaterally agreed, the ABI message shall contain any of the following items of data:

- Route;
- Other Flight Plan Data.

3. Example

- (ABIOMAE/OMSJ578-ABY464/A5476-VIDP-MAXMO/0032F100-OMSJ-9/A320/M-15/N0457F360 OBDAG LUN G333 TIGER/N0454F380 G452 RK G214 PG G665 ASVIB M561 MOBET/N0409F260 A419 DARAX -80/S-81/W/EQ Y/EQ U/NO R/EQ/A1B1C1D1L1O1S1)

III. Activate ACT

1. Purpose of the ABI Message

The ACT message satisfies the following operational requirements:

- Replace the verbal boundary estimate by transmitting automatically details of a flight from one ATC unit to the next prior to the transfer of control;
- Update the basic flight plan data in the receiving ATC unit with the most recent information;
- Facilitate distribution and display of flight plan data within the receiving ATC unit to the working positions involved;
- Enable display of correlation in the receiving ATC unit;
- Provide transfer conditions to the receiving ATC unit.

2. Message Contents

The ACT message shall contain the following items of data:

- Message Type;
- Message Number;
- Aircraft Identification;
- SSR Mode and Code;
- Departure Aerodrome;
- Estimate Data;
- Destination Aerodrome;
- Number and Type of Aircraft;
- Type of Flight;
- Equipment Capability and Status.

If bilaterally agreed, the ACT message shall contain any of the following items of data:

- Route;
- Other Flight Plan Data;
- Actual Take-Off Time.

Note: The Actual Take-Off Time is normally used in the cases where the ACT follows a PAC message that included the Estimated Take-Off Time.

3. Example

- (ACTOMAE/OMSJ727-ABY604/A7306-HEBA-ALRAR/0130F110-OMSJ-9/A320/M-15/N0428F250 DCT NOZ A727 CVO/N0461F350 UL677 MENLI UN697 NWB W733 METSA UB411 ASH G669 TOKLU UP559 ASPAK/N0438F290 UP559 NALPO P559 ITGIB/N0409F230 P559 -80/S-81/W/EQ Y/EQ U/NO R/EQ/A1B1C1D1L1O1S1)

IV. Revision Message REV

1. Purpose of the REV Message

The REV message is used to transmit revisions to co-ordination data previously sent in an ACT message provided that the accepting unit does not change as a result of the modification.

2. Message Contents

The REV message shall contain the following items of data:

- Message Type;
- Message Number;
- Aircraft Identification;
- Departure Aerodrome;
- Estimate Data and/or Co-ordination point;
- Destination Aerodrome;

Note: The Estimate Data contained in the REV has to include complete data in the Estimate Data field in order to eliminate any ambiguity regarding the transfer elements. If the ACT message included the supplementary flight level, the following REV message will include the supplementary flight level if still applicable.

The REV message shall contain the following items of data if they have changed:

- SSR Mode and Code;
- Equipment Capability and Status.

If bilaterally agreed, the REV message shall contain any of the following items of data, if they have changed:

- Route.

If bilaterally agreed, the REV message shall contain any of the following items of data:

- Message Reference.

3. Example

- (REVBC/P873-UAE4486-OMDB-TUMAK/2201F360-LERT-81/Y/NO U/EQ)

V. Preliminary Activation PAC

1. Purpose of the PAC Message

The PAC message satisfies the following operational requirements:

- Notification and pre-departure co-ordination of a flight where the time of flight from departure to the COP is less than that which would be required to comply with the agreed time parameters for ACT message transmission;
- Notification and pre-departure co-ordination of a flight by a local (aerodrome /approach control) unit to the next unit that will take control of the flight;
- Provide for acquisition of missing flight plan data in case of discrepancies in the initial distribution of flight plan data;
- Request the assignment of an SSR code from the unit to which the above notification/coordination is sent.

2. Message Contents

The PAC message shall contain the following items of data:

- Message Type;
- Message Number;
- Aircraft Identification;
- SSR Mode and Code;
- Departure Aerodrome;
- Estimated Take-Off Time or Estimate Data;
- Destination Aerodrome;
- Number and Type of Aircraft;

A PAC message sent from a TMA control unit or an ACC shall contain the following items of data:

- Type of Flight;
- Equipment Capability and Status.

If bilaterally agreed, the PAC message shall contain any of the following items of data:

- Route;
- Other Flight Plan Data;
- Message Reference.

3. Example

- (PACOMSI/OMAE292-SQC7365/A9999-OMSJ0020-WSSS-9/B744/H-15/N0505F310 DCT RIKET B525 LALDO B505 NADSO A777 VAXIM P307 PARAR N571 VIRAM/N0505F330 N571 LAGOG/M084F330 N571 IGOGU/M084F350 N571 GUNIP/N0500F350 R467 -80/S-81/W/EQ Y/EQ U/NO R/EQ/)

VI. Message for the Abrogation of Co-ordination MAC

1. Purpose of the MAC Message

A MAC message is used to indicate to the receiving unit that the co-ordination or notification previously effected for a flight is being abrogated. The MAC is not a replacement for a Cancellation (CNL) message, as defined by ICAO, and therefore, shall not be used to erase the basic flight plan data.

2. Message Contents

The MAC message shall contain the following items of data:

- Message Type;
 - Message Number;
 - Aircraft Identification;
 - Departure Aerodrome;
 - Co-ordination point;
 - Destination Aerodrome;
- If bilaterally agreed, the MAC message shall contain any of the following items of data:
- Message Reference;
 - Co-ordination Status and Reason

3. Example

- (MACAM/BC112 AM/BC105-HOZ3188-EHAM-NIK-LFPG-18/STA/INITFL)

VII. SSR Code Assignment Message COD

1. Purpose of the COD Message

The Originating Region Code Allocation Method (ORCAM) is provided to permit a flight to respond on the same code to successive units within a participating area. Unless code allocation is performed centrally, e.g. by an ACC, airports may need to be individually allocated a set of discrete SSR codes. Such allocations are very wasteful of codes.

The COD message satisfies the operational requirement for the issue of a Mode A SSR code by one Air Traffic Service Unit to another for a specified flight when requested. The COD message also satisfies the operational requirement to inform the transferring Air Traffic Service Unit of the next Mode A SSR code when the code assigned cannot be retained by the accepting Air Traffic Service Unit.

2. Message Contents

The COD message shall contain the following items of data:

- Message Type;
 - Message Number;
 - Aircraft Identification;
 - SSR Mode and Code;
 - Departure Aerodrome;
 - Destination Aerodrome;
- If bilaterally agreed, the COD message shall contain any of the following items of data:
- Message Reference.

3. Example
 - (CODOMAE/OMSJ720-ABY567/A3450-OMSJ-OAKB)

VIII. Arrival Management Message AMA

1. Purpose of the AMA Message

Arrival management requires the capability for an accepting unit to pass to the transferring unit information on the time that a flight is required to delay (lose) or gain in order to optimise the approach sequence.

The AMA message satisfies the following operational requirements in order to alleviate ATC workload in co-ordinating arriving flights:

- Provide the transferring ATC unit with the time that the flight is to delay/gain at the arrival management metering fix;
- Where procedures have been bilaterally agreed between the units concerned, provide the transferring ATC unit with a target time for the flight to be at the COP;
- When bilaterally agreed, provide the transferring unit with a speed advisory. The speed advisory needs to be communicated to the flight, prior to transfer.

2. Message Contents

The AMA message shall contain the following items of data:

- Message Type;
 - Message Number;
 - Aircraft Identification;
 - Departure Aerodrome;
 - Destination Aerodrome;
- and based on bilateral agreement, contain one or more of the following items of data:
- Metering Fix and Time over Metering Fix;
 - Total Time to Lose or Gain;
 - Time at COP;
 - Assigned speed;
 - Application point;
 - Route;
 - Arrival sequence number

Note: The item Route contains the requested routing

3. Example

- (AMAM/BN112-AZA354-LIRF-CLS/0956-LEMD-18/MFX/PRADO TOM/1022 TTL/12)

IX. Logical Acknowledgement Message LAM

1. Purpose of the LAM Message

The LAM is the means by which the receipt and safeguarding of a transmitted message is indicated to the sending unit by the receiving unit.

The LAM processing provides the ATC staff at the transferring unit with the following:

- A warning when no acknowledgement has been received;
- An indication that the message being acknowledged has been received, processed successfully, found free of errors, stored and, where relevant, is available for presentation to the appropriate working position(s).

2. Message Contents

The LAM message shall contain the following items of data:

- Message Type;
- Message Number;
- Message Reference.

3. Example

- (LAMOMSJ/OMAE939OMAE/OMSJ718)

X. Logical Acknowledgement Message LAM

1. The INF message is used to provide information on specific flights to agencies not directly involved in the coordination process between two successive ATC units on the route of flight.

The INF message may be used to provide copies of messages and to communicate agreed co-ordination conditions to such agencies following a dialogue between controllers. For this purpose INF messages may be generated by the systems at the transferring or accepting unit. The message may also be used to provide information in relation to any point on the route of flight to an agency. The format allows the communication of initial data, revisions and cancellations.

2. The INF message shall contain the following items of data:

- Message type;
- Message number;
- All items of operational data as contained in the original message or resultant co-ordination being copied;
- Reference Message Type.

6.3. Example

(INFL/IT112-BAW011/A5437-EGLL-KOK/1905F290-OMDB-9/B747/H-15/N0490F410 DVR
KOK UG1 NTM UB6 KRH-18/MSG/ACT)

The Pan Regional (NAT and APAC) Interface Control Document for ATS Interfacility Data Communications (PAN AIDC ICD) Version 1.0 has defined the specific AIDC messages to be used between ATSUs should be included in bilateral agreements as in the below table which is number as table 4-3

AIDC Messages

Core	Non-core	Message Class	Message
X		Notification	ABI (Advance Boundary Information)
X		Coordination	CPL (Current Flight Plan)
X		Coordination	EST (Coordination Estimate)
	X	Coordination	PAC (Preliminary Activate)
X		Coordination	MAC (Coordination Cancellation)
X		Coordination	CDN (Coordination Negotiation)
X		Coordination	ACP (Acceptance)
X		Coordination	REJ (Rejection)
	X	Coordination	PCM (Profile Confirmation Message)
	X	Coordination	PCA (Profile Confirmation Acceptance)
	X	Coordination	TRU (Track Update)
X		Transfer of Control	TOC (Transfer of Control)
X		Transfer of Control	AOC (Acceptance of Control)
X		General Information	EMG (Emergency)
X		General Information	MIS (Miscellaneous)
X		Application Management	LAM (Logical Acknowledgement Message)
X		Application Management	LRM (Logical Rejection Message)
	X	Application Management	ASM (Application Status Monitor)
	X	Application Management	FAN (FANS Application Message)
	X	Application Management	FCN (FANS Completion Notification)
	X	Surveillance Data Transfer	ADS (Surveillance ADS-C)

7.5. D – MESSAGE TYPES – PHASE 2

The messages during this phase will be the advance messages covering all phases of flight

Intentionally left blank

8-6. TEST OBJECTIVES

Test Objectives		
No	Test step	Test Description
01	Connectivity between FDPSSs	Check connectivity between FDPSSs.
02	FPL Processing	Check FPLs are correctly received and processed.
<i>Preliminary Activation Message (PAC)</i>		
03	PAC Message association	Check PAC messages are correctly sent, received, processed and associated with the correct FPL. If the system is unable to process a message that is syntactically and semantically correct, it should be referred for Manual intervention.
04	Coordination of Changes to previous PAC message	Check changes to previous PAC messages such as Change in SSR code, Aircraft type, Coordination point, Flight level and Destination aerodrome are correctly sent, received and associated with the correct FPL.
<i>Advance Boundary Information (ABI)</i>		
05	ABI Message association	Check ABI messages are correctly sent, received, processed and associated with the correct FPL. If the system is unable to process a message that is syntactically and semantically correct, it should be referred for Manual intervention.
06	Coordination of Changes to previous ABI message	Check changes to previous ABI messages such as Change in SSR code, Aircraft type, Coordination point, Flight level and Destination aerodrome are correctly sent, received and associated with the correct FPL.
<i>Activate (ACT)</i>		
07	ACT Message association	Check ACT messages are correctly sent, received, processed and associated with the correct FPL. If the system is unable to process a message that is syntactically and semantically correct, it should be referred for Manual intervention.
<i>Logical Acknowledgement Messages (LAM)</i>		
08	LAM Message generation	Check LAM messages are generated for messages that are syntactically and semantically correct.
<i>SSR Code Request Messages (COD)</i>		
09	COD Message association	Check COD messages are sent with correct SSR Code, received, processed and associated with the correct FPL. If the system is unable to process a message that is syntactically and semantically correct, it should be referred for Manual intervention.

9-7. SAMPLE TEST SCRIPTS

NOTE: All the samples are provided by UAE

1. Test 001 Connectivity:

Test 001 – Connectivity				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Ping Doha FDPS from RDS FDPS	OK / Not OK	OK / Not OK	
02	Ping RDS FDPS from Doha FDPS	OK / Not OK	OK / Not OK	
03	Check the link	Log in as root in rds fdps Type in netstat -tnap, should show the link “established” OK / Not OK	Check the link “established” OK / Not OK	

2. Test 002 Flight plan:

Test 002 – Flight Plan – sent from UAE ACC				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Send TST001 (OMAA-OTBD)	OK / Not OK	OK / Not OK	
02	Send TST002 (OMAM-OTBH)	OK / Not OK	OK / Not OK	

03	Send TST003 (OMAA-OEJN)	OK / Not OK	OK / Not OK	
04	Send TST004 (OOMS – OTBD)	OK / Not OK	OK / Not OK	
05	Send TST005 (OTBD – OMDB)	OK / Not OK	OK / Not OK	
06	Send TST006 (OTBH – OMDM)	OK / Not OK	OK / Not OK	
07	Send TST007 (OEJN-OMAD)	OK / Not OK	OK / Not OK	
08	Send TST008 (OTBD – OOMS)	OK / Not OK	OK / Not OK	

3. Test 003 Preliminary Activation Message (PAC):

Test 003 – Preliminary Activation Message (PAC) <i>Doha FDPS to UAE ACC FDPS</i>				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Activate start up TST005 (OTBD – OMDB) SSR code:0001 RFL : FPL level	SFPL moves from Pending to Workqueue with SSR code, check CFL field OK / Not OK	OK / Not OK	
02	Change SSR of TST005 New SSR Code:0002	SFPL colour changes to Green in Workqueue OK / Not OK	OK / Not OK	
03	Change ATYP of TST005 New ATYP: A332	SFPL colour changes to Green in Workqueue OK / Not OK	OK / Not OK	
04	Change ADES of TST005 New ADES: VOMM	New FPL is created by OLDI with new ADES	OK / Not OK	

		OK / Not OK		
05	Change RFL of TST005 New RFL: 370	Manual coordination requires OK / Not OK	OK / Not OK	
06	Change COP of TST005 New COP : NADAM	SFPL colour changes to Green in Workqueue OK / Not OK	OK / Not OK	
07	Check LAM messages	OK / Not OK	OK / Not OK	

4. Test 004 ABI & ACT messages:

Test 004 – Advance Boundary Information Message (ABI), Activate Message (ACT) Doha FDPS to UAE ACC FDPS				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Enter estimate for TST007 (OEJN – OMAD) SSR code:0003 Exit level : 190 ETX : Current time	SFPL moves from Pending to Work queue with SSR code, check ETN and CFL field OK / Not OK	OK / Not OK	
02	Change SSR of TST007 New SSR code: 0004	SFPL colour changes to Green if in Workqueue OK / Not OK	OK / Not OK	
03	Change ATYP of TST007 New ATYP: C130	SFPL colour changes to Green if in Workqueue OK / Not OK	OK / Not OK	

04	Change ADES of TST007 New ADES: OMAL	New FPL is created by OLDI with new ADES OK / Not OK	OK / Not OK	
05	Change XFL of TST007 New XFL: 170	SFPL colour changes to Green if in Workqueue OK / Not OK	OK / Not OK	
06	Change COP of TST007 New COP: NAMLA	SFPL colour changes to Green if in Workqueue OK / Not OK	OK / Not OK	
07	when ETX is Current time + 5 minutes the ACT should be automatically generated	No change, SFPL already in active. OK / Not OK	OK / Not OK	
08	Change ATYP of TST007 New ATYP:C30J	No change, SFPL already in active Expect manual coordination. OK / Not OK	Flag to notify ATCA that ATYP change is not communicated OK / Not OK	
09	Check LAM messages	OK / Not OK	OK / Not OK	

5. Test 005 ABI & ACT messages:

Test 005 – Advance Boundary Information Message (ABI), Activate Message (ACT) UAE ACC FDPS to Doha FDPS				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Enter estimate for TST004 (OOMS – OTBD) SSR code:0005 Exit level : 180 ETN : Current time COPX: MEKMA	SFPL moves from Pending to Active with SSR code A new ABI will be generated OK / Not OK	SSR, ETN and Entry level and entry point should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	

02	Change SSR of TST004 New SSR code: 0006	A new ABI will be generated OK / Not OK	SSR should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	
03	Change ATYP of TST004 New ATYP: AT45	A new ABI will be generated OK / Not OK	ATYP should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	
04	Change ADES of TST004 New ADES: OTBH	A new ABI will be generated OK / Not OK	ADES should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	
05	Change XFL of TST004 New XFL: 160	A new ABI will be generated OK / Not OK	Entry level should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	
06	Change COP of TST004 New COP: BUNDU	A new ABI will be generated OK / Not OK	COP should be automatically updated for the concerned flight and flagged for ATCA OK / Not OK	
07	when ETX is Current time + 5 minutes the ACT should be automatically generated	ACT will be generated OK / Not OK	OK / Not OK	
08	Change ATYP of TST004 New ATYP: B738	An indication to ATCO to show that this change needs to be manually coordinated	Expect manual coordination OK / Not OK	
09	Check LAM messages	OK / Not OK	OK / Not OK	

6. Test 006 PAC, ABI, ACT without FPL for UAE:

Test 006 – PAC, ABI, ACT – No FPL for UAE				
<i>Doha FDPS to UAE ACC FDPS</i>				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Activate start up TST009 (OTBD – OMAA) SSR code:0007 ATYP:A320 XFL: 210 COP: NAMLA	SFPL is created by PAC. OLDI window pops up. OK / Not OK	Automatically generates PAC message OK / Not OK	
02	Enter estimate for TST010, (OEJN – OOMS) SSR Code: 0010 ATYP: B738 XFL: 230 COP: BUNDU ETX: Current time	SFPL is created by ABI. OLDI window pops up. OK / Not OK	Automatically generates ABI message OK / Not OK	
03	Enter estimate for TST011, (OEJN – OOMS) SSR Code: 0011 ATYP: B738 XFL: 230 COP: BUNDU ETX: Current time + 3 mins	SFPL is created by ACT. OLDI window pops up. OK / Not OK	Automatically generates ACT message OK / Not OK	
04	Check LAM messages	OK / Not OK	OK / Not OK	

7. Test 007 ABI, ACT without FPL for Doha:

Test 007 – ABI, ACT – No FPL for Doha FDPS				
<i>UAE ACC FDPS to Doha FDPS</i>				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Enter estimate for TST012, (TACT – OTBH) SSR Code: 0012 ATYP: K35R XFL: 220 COP: TOSNA ETN: Current time	Automatically generates ABI message OK / Not OK	FPL created by ABI and flags for ATCA attention. OK / Not OK	
02	Enter estimate for TST013, (OOMS – OTBD) SSR Code: 0013 ATYP: A321 XFL: 180 COP: MEKMA ETN: Current time -20 mins	Automatically generates ACT message OK / Not OK	FPL created by ACT and flags for ATCA attention. OK / Not OK	
03	Check LAM messages	OK / Not OK	OK / Not OK	

8. Test 008 Duplicate SSR:

Test 008 – Duplicate SSR				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Create a FPL TST020 at Doha with SSR 0014 to block SSR code Enter estimate data for TST002 at UAE RDS (OMAM – OTBH) SSR Code : 0014 ETN: Current time XFL: 180	OLDI message window pops up with a question mark on TST002 OK / Not OK	Duplicate SSR should be duly flagged to operator OK / Not OK	
02	Create a FPL TST030 at UAE RDS with SSR 0015 to block SSR code Enter estimate data for TST008 at Doha (OTBD – OOMS) SSR Code : 0015 ETN: Current time XFL: 230	OLDI message window pops up with a question mark on TST008 OK / Not OK	Duplicate SSR should be duly flagged to operator OK / Not OK	

9. Test 009 Communication failure:

Test 009 – Communication failure				
<i>No</i>	<i>Test description</i>	<i>UAE ACC FDPS</i>	<i>Doha FDPS</i>	<i>Remarks</i>
01	Simulated link failure	OLDI messages that are not coordinated will move from Active to Workqueue OK / Not OK	Failures should be duly flagged to operator OK / Not OK	

10. Test Flight plans:

a. TST001 (OMAA – OTBD)

(FPL-TST001-IS
-A320/M-SDFHIJLOPRVWY/SD
-OMAA0655
-N0415F220 TOXIG Z994 VEBAT P899 MEKMA DCT NAJMA DCT DOH
-OTBD0030 OEDF
-PBN/A1B1C1D1L1O1S1 NAV/GPSRNAV DOF/13???? REG/A6TST
EET/OMAE0008 OBBD0020 SEL/ARKQ OPR/TST RMK/TEST FPL)

b. TST002 (OMAM – OTBH)

(FPL-TST002-IM
-C17/H-SGHJPRWXYZ/SD
-OMAM0820
-N0454F280 DCT MA270020 DCT MA285032 DCT DASLA Z994 BUNDU B415
DOH
DCT
-OTBH0032 OMAM
-PBN/A1B1C1D1L1O1S1 NAV/GPSRNAV DOF/13???? REG/A6TST
EET/OBBD0019 SEL/CFPR NAV/RNP10 RNAV1 RNAV5 RNVD1E2A1
RMK/TEST FPL)

c. TST003 (OMAA – OEJN)

(FPL-TST003-IS
-A320/M-SDGHJLPRWXY/S
-OMAA0800
-N0467F220 TOXIG Z994 BUNDU B415 DOH A415 KIA G782 RGB/N0461F360
UM309 RABTO G782 ASLAT DCT
-OEJN0201 OEMA
-PBN/A1B1C1D1L1O1S1 NAV/GPSRNAV DAT/SV DOF/13???? REG/A6TST
EET/OMAE0009 OBBD0021 OEJD0044 SEL/BMAR RMK/TCAS
EQUIPPED RMK/TEST FPL)

d. TST004 (OOMS – OTBD)

(FPL-TST004-IS
-A320/M-SDFHIJLOPRVWY/SD
-OOMS0655
-N0458F320 MCT L764 PAXIM P899 ITRAX ALN P899 DASLA/N0440F260
Z994
VEBAT/N0424F220 P899 MEKMA DCT NAJMA DCT DOH
-OTBD0057 OMAA
-PBN/A1B1C1D1L1O1S1 DAT/V NAV/TCAS DOF/13???? REG/A6TST
EET/OMAE0023 OBBD0047 SEL/GLEH RMK/TEST FPL)

e. TST005 (OTBD – OMDB)

(FPL-TST005-IS

-B738/M-SHPRWXYIGZ/S
-OTBD1230
-N0390F210 DOH L305 ITITA L308 DESDI DESDI4T
-OMDB0049 OMRK OMAL
-PBN/A1B1CID1L1O1S1 NAV/RNAV1 RNAV5 RNP4 RNP10 RNP5
RNVD1E2A1 DOF/13???? REG/A6TST
EET/OMAE0015 SEL/HQER RMK/TEST FPL)

f. TST006 (OTBH – OMDM)

(FPL-TST006-IM
-C130/M-SHITUY/S
-OTBH1000
-N0311F150 UL305 ALSEM L305 ITITA L308 SHJ DCT
-OMDM0059 OBBI
-PBN/A1B1CID1L1O1S1 NAV/RNAV1 RNAV5 RNP4 RNP10 RNP5
RNVD1E2A1 DOF/13???? REG/A6TST
EET/OMAE0020 RMK/TEST FPL)

g. TST007 (OEJN – OMAD)

(FPL-TST007-IN
-GLF4/M-SDGHIRVWXY/S
-OEJN0600
-N0458F210 JDW T532 KIA B418 ASPAN N318 XAKUM Q666 BOXAK DCT
-OMAD0212 OMAL
-PBN/A1B1C1D1L1O1S1 NAV/RNAV1 RNAV5 RNP4 RNP10 RNP5
RNVD1E2A1 DOF/13???? REG/A6TST EET/OBBB0113 OMAE0151
RMK/TEST FPL)

h. TST008 (OTBD – OOMS)

(FPL-TST008-IS
-A320/M-SDFHIJLOPRVWY/SD
-OTBD0630
-N0466F310 B415 AFNAN B415 ADV N685 LAKLU G216 MCT DCT
-OOMS0103 OMAL
-PBN/A1B1C1D1L1O1S1 NAV/RNAV1 RNAV5 RNP4 RNP10 RNP5
RNVD1E2A1 DOF/13???? REG/A6TST EET/OBBB0007 OMAE0012
OOMM0038 SEL/GLEH RMK/TEST FPL)

10-8. BILATERAL AGREEMENT TEMPLATE

Bilateral Agreement Template to be appended to the main Letter of Agreement (LoA) Template
Please choose the appropriate OLDI or AIDC.

NOTE:

This part of the LOA only to be used as guidance it is related to the Automatic data exchange either OLDI or AIDC which are attachments 1 and 2 respectively to Appendix C of the complete letter of agreement.

Appendix C (1)

Exchange of Flight Data

(With automatic data exchange)

Unit 1

Revision: xxxx

Effective: xx xxxx xxxx

Revised: xxx

Unit 2

C.1 General

C.1.1 Basic Flight Plans

Basic flight plan data should normally be available at both ATS Units.

C.1.2 Current Flight Plan Data

Messages, including current flight plan data, shall be forwarded by the transferring ATS unit to the accepting ATS unit either by automatic data exchange or by telephone to the appropriate sector/position.

C.1.2.1 Automatic Data Exchange.

The messages (List agreed message for OLD e.g. ABI/ACT/LAM/PAC/REV/MAC messages are exchanged between the two ATS units in accordance with Attachment 1 or Attachment 2 to Appendix C.

C.1.2.2 Verbal Estimates.

For conditions that are not supported by the automatic data exchange, verbal estimates will be exchanged.

A verbal estimate shall be passed to the appropriate sector at the accepting ATS unit at least value minutes prior, but not earlier than 30 minutes before the aircraft is estimated to pass the transfer of control point.

A verbal estimate shall contain:

- a) Callsign.

Note: To indicate that the flight plan is available, the accepting ATS unit should state aircraft type and destination after having received the callsign.

b) SSR code:

Note: Normally, the notification of a SSR code indicates that the selection of that code by the aircraft was verified.

c) ETO for the appropriate COP as laid down in Appendix D to this LoA.

d) Cleared level, specifying climb or descent conditions if applicable, at the transfer of control point.

Requested level if different from cleared level.

e) Other information, if applicable.

Normally, verbal estimates will not be passed in parallel with ACT messages.

In all cases, verbally passed data shall take precedence over data exchanged automatically.

C.1.2.3 Failure of Automatic Data Exchange.

In the event of a failure which prevents the automatic transfer of data, the Supervisors shall immediately decide to revert to the verbal exchange of estimates.

After recovery from a system failure, the Supervisors shall agree as to when they will revert to automatic data exchange.

C.1.3 **Non-availability of Basic Flight Plan Data**

If the accepting ATS unit does not have basic flight plan data available, additional information may be requested from the transferring ATS unit to supplement the ACT message or a verbal estimate.

Within the context of RVSM, such additional information should include:

a. the RVSM approval status of the aircraft; and

b. whether or not a non-RVSM approved aircraft is a State aircraft.

C.1.4 **Revisions**

Any significant revisions to the flight data are to be transmitted to the accepting ATS unit. Time differences of value minutes or more are to be exchanged.

Any levels which differ than describe in Appendix D of this LOA are subject to an Approval Request.

C.1.5 **Expedite Clearance and Approval Requests**

Whenever the minimum time of value minutes for a verbal estimate, or those prescribed in Attachment 1 to Appendix C for ACT messages, cannot be met, either an expedite clearance request, an approval request (*or a PAC*), as appropriate, shall be initiated.

C.2 **Means of Communications and their Use**

C.2.1 **Equipment**

The following lines are available between Unit 1 and Unit 2:

Line Type	Amount	Additional Information
Data Line		
Telephone Lines		

“Additional Information” column should indicate if telephone lines meet the requirements for Direct Controller-Controller Voice Communication (DCCVC) or Instantaneous Direct Controller-Controller Voice Communication (ICCV).

C.2.2 Verbal Co-ordination

All verbal communications between non-physically adjacent controllers should be terminated with the initials of both parties concerned.

Exchange of flight plan data, estimates and control messages by voice shall be carried out in accordance with the following tables:

C.2.2.1 Messages from Unit 1 to Unit 2.

Receiving Sector/COPs	Message	Position
Sector Name COPs	Flight Plan Data and Estimates	
	Control Messages, Expedite Clearances, Approval Requests and Revisions	
	Surveillance Co-ordination	

C.2.2.2 Messages from Unit 2 to Unit 1.

Receiving Sector/COPs	Message	Position
Sector Name COPs	Flight Plan Data and Estimates	
	Control Messages, Expedite Clearances, Approval Requests and Revisions	
	Surveillance Co-ordination	

C.3 Failure of Ground/Ground Voice Communications

C.3.1 Fall-Back Procedures for Co-ordination

To mitigate the effects of failures of direct speech circuits, both parties will establish and maintain dial-up facilities via PABX and ATC Voice Communications Systems (VCS) as follows:

Sector Name Tel Number (For Both Units)

Stand-alone telephones with auto-dial facilities will be maintained as a second level of fall-back to cover the event of failure of PABX or VCS:

Sector Name Tel Number (For Both Units)

C.3.2 Alternate Fall-Back Procedures for Co-ordination

In case of communications failure where the alternatives described in paragraph C.3.1 above are not available or practicable, pilots shall be instructed, at least 5 minutes prior to the transfer of control point, to pass flight data on the appropriate frequency of the accepting ATS unit for the purpose of obtaining an ATC entry clearance from the accepting ATS unit.

If the accepting ATS unit cannot issue an entry clearance to the pilot upon his initial contact, the pilot shall be instructed to inform the transferring ATS unit accordingly via RTF.

The transferring ATS unit shall hold the aircraft within its AoR and after a minimum of 10 minutes instruct the pilot to re-establish RTF contact with the accepting ATS unit.

This procedure shall be repeated until an onward clearance has been obtained from the accepting ATS unit.

C.4 Validity

This Appendix to the LoA takes effect on xxx xxxx xxxx and supersedes previous Appendix to Letter of arrangements between the Unit 1 and Unit 2.

Date:

Date:

Name

Name

Title

Title

Authority 1

Authority 2

Attachment 1 to Appendix C

Automatic Data Exchange related to OLDI

ABI/ACT/LAM messages are exchanged between the two ATS units in accordance with the table below:

Messages	COPs	Time and/or Distance Parameters	
		Messages from Unit 1 To Unit 2	Messages from Unit 1 To Unit 2
ABI			
ACT			
LAM			
REV			
PAC			
MAC			
LOF			
NAN			

Attachment 2 to Appendix C

Automatic Data Exchange related to AIDC

This is the Generic Template available in the PAN which also contain real sample agreement Auckland Oceanic – Brisbane ATS Centre and Auckland Oceanic – Nadi ATM Operations Centre

AIDC Procedures

1. The format of AIDC messages (*List messages used e.g. ABI, PAC, CDN, CPL, ACP, REJ, MAC, LAM and LRM*) are as defined by the Pan Regional (NAT and APAC) AIDC Interface Control Document (ICD) as amended from time to time, unless described otherwise in this LOA.
2. List messages not supported (*e.g. “EST, TOC, AOC messages are not supported”*).
3. Acceptance of CPL or CDN message is approval of the flight’s profile and requires no further voice communication (i.e. Non-Standard Altitudes, Block Altitudes, and Deviations).
4. (*Describe other procedures applicable to the use of AIDC for this LOA. Some examples are listed below*)
 - a. *Example only. If there is any doubt with regard to the final coordination data, voice coordination should be used for confirmation.*
 - b. *Example only. Receipt of a MAC message must not be interpreted as meaning that the flight plan has been cancelled. Voice coordination must be conducted by the transferring controller to confirm the status of the flight.*
 - c. *Example only. Each facility should advise the other facility of any known equipment outage that affects AIDC. In the event of AIDC outage, voice communication procedures will apply.*
 - d. *Example only. Truncation. Where route amendment outside the FIR is unavoidable.*
 - i. *Terminate the route details at the farthest possible flight plan significant point of the flight and enter “T” immediately following this.*
 - ii. *Without amending the originally received details, every effort is to be made to truncate the route at a minimum of one significant point beyond the adjacent FIR to provide an entry track in that FIR.*

AIDC Messages

(For each message used describe when it will be sent by each ATSU under the parameter column and use the Notes column to describe other applicable information for the message use by each ATSU. The data below provides an example of the type of information that could be incorporated.)

Messages	Parameter	Notes
ABI	<p>ATSUI: Sends ABI approx. 80 minutes prior to boundary (73 minutes prior to the 50 nm expanded sector boundary).</p> <p>ATSU2: Sends ABI approx. 87 minutes prior to boundary (80 minutes prior to the 50 nm expanded sector boundary).</p> <p>(Note: An updated ABI will not be sent once a CPL has been sent.)</p>	<p>ATSUI : ATSU2 Updated ABI's will be sent automatically if there is any change to profile. ABI is sent automatically and is transparent to the controller. ABI automatically updates the receiving unit's flight data record.</p>
CPL	<p>ATSUI : ATSU2 Send CPL messages approx. 37 minutes prior to the boundary (30 minutes prior to the 50 nm expanded sector boundary).</p>	<p>ATSUI : ATSU2 CPL messages should be sent by the transferring controller in sufficient time to allow the completion of coordination at least 30 minutes prior to the boundary or 30 minutes prior to the aircraft passing within 50nm of the FIR boundary for information transfers.</p>
CDN	<p>ATSUI : ATSU2 CDN messages are sent by either the transferring or receiving facility to propose a change once the coordination process has been completed, i.e., CPL sent and ACP received. CDN's must contain all applicable profile restrictions (e.g. weather deviations, speed assignment, block altitude). If the use of a CDN does not support this requirement, then verbal coordination is required.</p>	<p>ATSUI : ATSU2 The APS will display a flashing "DIA" until receipt of ACP. If ACPJ not received within ten (10) minutes, controller is alerted with a message to the queue. CDN messages are not normally used for coordination of reroutes; however, with the receiving facilities approval a CDN may be used to coordinate a reroute on a critical status aircraft such as in an emergency.</p>
PAC	<p>ATSUI : ATSU2 PAC messages will normally be sent when the time criteria from the departure point to the boundary is less than that stipulated in the CPL.</p>	<p>ATSUI : ATSU2 Will respond to a PAC message with an ACP. PAC messages should be verbally verified with receiving facility.</p>
ACP	<p>ATSUI : ATSU2</p>	<p>ATSUI : ATSU2 The APS will display a flashing "DIA" until receipt of ACP. If ACP not received within ten (10) minutes, controller is alerted with a message to the queue.</p>
TOC	<p>ATSUI : ATSU2 Not supported. Implicit hand in/off.</p>	
AOC	<p>ATSUI : ATSU2 Not supported. Implicit hand in/off.</p>	
MAC	<p>ATSUI : ATSU2 MAC messages are sent when a change to the route makes the other facility no longer the "next" responsible unit.</p>	<p>ATSUI : ATSU2 Receipt of a MAC message must not be interpreted as meaning that the flight plan has been cancelled. Voice coordination must be conducted by the transferring</p>

		<i>controller to confirm the status of the flight.</i>
<i>REJ</i>	<i>ATSUI : ATSU2</i> <i>REJ messages are sent in reply to a CDN message when the request change is unacceptable</i>	<i>ATSUI : ATSU2</i> <i>REJ messages are sent only as a response to a CDN message.</i>

AIDC Messages

(For each message used describe when it will be sent by each ATSU under the parameter column and use the Notes column to describe other applicable information for the message use by each ATSU. The data below provides an example of the type of information that could be incorporated.)

Messages	Parameter	Notes
ABI	<p>ATSU1: Sends ABI approx. 80 minutes prior to boundary (73 min prior to the 50 nm expanded sector boundary).</p> <p>ATSU2: Sends ABI approx. 87 minutes prior to boundary (80 min prior to the 50 nm expanded sector boundary).</p> <p>(Note: An updated ABI will not be sent once a CPL has been sent.)</p>	<p>ATSU1 : ATSU2</p> <p>Updated ABI's will be sent automatically if there is any change to profile. ABI is sent automatically and is transparent to the controller. ABI automatically updates the receiving unit's flight data record.</p>
CPL	<p>ATSU1 : ATSU2</p> <p>Send CPL messages approx 37 minutes prior to the boundary (30 minutes prior to the 50 nm expanded sector boundary).</p>	<p>ATSU1 : ATSU2</p> <p>CPL messages should be sent by the transferring controller in sufficient time to allow the completion of coordination at least 30 minutes prior to the boundary or 30 minutes prior to the aircraft passing within 50nm of the FIR boundary for information transfers.</p>
CDN	<p>ATSU1 : ATSU2</p> <p>CDN messages are sent by either the transferring or receiving facility to propose a change once the coordination process has been completed, i.e., CPL sent and ACP received. CDN's must contain all applicable profile restrictions (e.g. weather deviations, speed assignment, block altitude). If the use of a CDN does not support this requirement, then verbal coordination is required.</p>	<p>ATSU1 : ATSU2</p> <p>The APS will display a flashing "DIA" until receipt of ACP. If ACPJ not received within ten (10) minutes, controller is alerted with a message to the queue.</p> <p>CDN messages are not normally used for coordination of reroutes; however, with the receiving facilities approval a CDN may be used to coordinate a reroute on a critical status aircraft such as in an emergency.</p>

<i>PAC</i>	ATSUI : ATSU2 <i>PAC messages will normally be sent when the time criteria from the departure point to the boundary is less than that stipulated in the CPL.</i>	ATSUI : ATSU2 <i>Will respond to a PAC message with an ACP. PAC messages should be verbally verified with receiving facility.</i>
<i>ACP</i>	ATSUI : ATSU2	ATSUI : ATSU2 <i>The APS will display a flashing “DIA” until receipt of ACP. If ACP not received within ten (10) minutes, controller is alerted with a message to the queue.</i>
<i>TOC</i>	ATSUI : ATSU2 <i>Not supported. Implicit hand in/off.</i>	ATSUI : ATSU2
<i>AOC</i>	ATSUI : ATSU2 <i>Not supported. Implicit hand in/off.</i>	
<i>MAC</i>	ATSUI : ATSU2 <i>MAC messages are sent when a change to the route makes the other facility no longer the “next” responsible unit.</i>	ATSUI : ATSU2 <i>Receipt of a MAC message must not be interpreted as meaning that the flight plan has been cancelled. Voice coordination must be conducted by the transferring controller to confirm the status of the flight.</i>
<i>REJ</i>	ATSUI : ATSU2 <i>REJ messages are sent in reply to a CDN message when the request change is unacceptable</i>	ATSUI : ATSU2 <i>REJ messages are sent only as a response to a CDN message.</i>

4-9. IMPLEMENTATION PHASES

In line with ASBU Block 0 time lines, the AIDC/OLDI implementation shall be completed as per the MID Air Navigation Plan. In order to support and assist, the implementation could be accomplished in phases listed below. The actual targets set for the MID Region are in the MID Air Navigation Strategy.

Phase 1	<ul style="list-style-type: none"> • OLDI/AIDC capable ATSUs should start implementation activities. The activity should cover the following: <ul style="list-style-type: none"> ➤ test activities ➤ operator training ➤ Revision of LoA ➤ transition activities ➤ implementation ➤ post-implementation reviews • The ATSUs not capable of OLDI/AIDC should avail the facility of Standalone terminals with a planned implementation asap, and budget for full Integration with a planned implementation date of the MID Air Navigation Strategy.
Phase 2	<ul style="list-style-type: none"> • The ATSUs using OLDI/AIDC in an Operational environment should assist other ATSUs to implement OLDI/AIDC • The OLDI/AIDC software is readily available therefore the ATSUs waiting for software upgrade should expect a software package asap. On receipt of it they should start implementation activities. The activity should cover the following: <ul style="list-style-type: none"> ➤ test activities ➤ operator training ➤ Revision of LoA ➤ transition activities ➤ implementation ➤ post-implementation reviews
Phase 3	<ul style="list-style-type: none"> • All ATSUs are connected by Integrated OLDI/AIDC or Standalone terminals

MID Region AIDC/OLDI Applicability Area (Priority 1 and 2 for Implementation)
As of December 2019

ACC	Adjacent ACCs						
Amman	Cairo (1)	Baghdad (2)	Damascus (2)	Jeddah (1)	Tel Aviv (1)		
Baghdad	Amman (2)	Ankara (1)	Damascus (2)	Jeddah (2)	Tehran (2)	Kuwait (1)	
Bahrain	Doha (1)	Emirates (1)	Jeddah (1)	Kuwait (1)	Riyadh (1)	Tehran (2) AFTN MSG	Dammam(2)
Beirut	Damascus (2)		Nicosia (1)				
Cairo	Amman (1)	Athens (2)	Jeddah (1)	Khartoum (1)	Nicosia (1)	Tel Aviv (2)	Tripoli (2)
Damascus	Amman (2)	Ankara (2)	Bagdad (2)	Beirut (2)	Nicosia (2)		
Doha*	Bahrain (1)	Emirates (1)	Jeddah (2)	Riyadh (2)			
Emirates	Bahrain (1)	Doha (1)	Jeddah (1)	Muscat (1)	Tehran (2) AFTN MSG		
Jeddah	Amman (1)	Asmara (2)	Baghdad (2)	Bahrain (1)	Cairo (1)	Doha (2)	Emirates (1)
	Khartoum (1)	Kuwait (2)	Muscat (1)	Riyadh (1)		Sana'a (2)	
Riyadh	Bahrain (1)	Doha (2)	Kuwait (2)	Jeddah (1)			
Khartoum	Addis (1)	Asmara (2)	Brazzaville (2)	Cairo (1)	Entebbe (2)	Jeddah (1)	Juba (1)
	Kinshasa (2)	N'Djamena (2)	Nairobi (2)	Tripoli (2)			
Kuwait	Baghdad (1)	Bahrain (1)	Jeddah (2)	Tehran (2)			
Muscat	Emirates (1)	Jeddah (1)	Karachi (2)	Mumbai (1)	Sana'a (2)	Tehran (1) AFTN MSG	
Sana'a	Djibouti (Addis Ababa) (2)	Asmara (2)	Jeddah (2)	Mogadishu (2)	Mumbai (2)	Muscat (2)	
Tehran	Ankara (1)	Ashgabat (2)	Baghdad (2)	Bahrain (1) AFTN MSG	Baku (2)	Emirates (2) AFTN MSG	Kabul (2)
	Karachi (1)	Kuwait (2)	Muscat (1)	Yerevan (2)			
Tripoli	Algiers (2)	Cairo (2)	Khartoum (2)	Malta (2)	N'Djamena (2)	Niamey (2)	Tunis (2)

(1) = Priority 1 for implementation based on the number of traffic movements and/or operational needs (Green color means already implemented)

(2) = Priority 2 for implementation based on the number of traffic movements or if other solution is in place such as exchange of information via AFTN

-END-