



International Civil Aviation Organization

MIDANPIRG/20 and RASG-MID/10

(Muscat, Oman, 14 - 17 May 2023)

Agenda Item 6.7: MET

MET IMPLEMENTATION

(Presented by the Secretariat)

SUMMARY

This paper presents information on MET implementation with a focus on WAFS, IWXXM and updates to the *ICAO MID Region SIGMET Guide*.

Action by the meeting is at paragraph 3.

REFERENCES

- MET SG/10 Report
- MIDANPIRG/19 Report
- ICAO MID SWX Advisory Information Dissemination Webinar
- ICAO MID IWXXM Implementation Webinar

1. INTRODUCTION

1.1 The meeting may recall the Tenth Meeting of MET Sub-Group (MET SG/10) (virtual meeting, 17-19 May 2022) agreed to the two Draft Conclusions related to the World Area Forecast System (WAFS) for consideration by MIDANPIRG/20. In addition, MET SG/10 reviewed global developments, and in particular, proposed global provisions expected to be included in Amendment 81 to Annex 3 applicable in November 2024. Other topics reviewed and discussed included the MID Region Air Navigation Report -2021; ICAO Meteorological Information Exchange Model (IWXXM) implementation; Air Navigation Deficiencies in the MET Field; and the Future Work Programme. In addition, States were urged to consider the Chair and Vice-Chair positions of MET SG, which have been vacant since MID MET SG/9.

2. DISCUSSION

WAFS

2.1 The MET SG/10 Meeting noted that the horizontal resolution of the WAFS hazard data sets for ICING, TURBULENCE and CUMULONIMBUS was increased from 1.25 degrees to 0.25 degrees. Furthermore, the new turbulence field, TURBULENCE SEVERITY, forecasts both clear air turbulence and orographic turbulence that provides their forecasts as an Eddy Dissipation Rate (EDR). In addition, the new icing field, ICING SEVERITY, gives a categorical assessment of icing as Nil, Trace, Slight, Moderate and Severe.

2.2 These improved WAFS data sets were introduced in accordance to ICAO Annex 3 Amendment 79 (applicable 5 November 2020) and available on SADIS in the /GRIB2/COMPRESSED/EGRR/ directory. The existing Turbulence Potential, Icing Potential and 1.25-degree cumulonimbus field are no longer listed in ICAO Annex 3, but will continue to be published on SADIS until November 2023. Therefore, SADIS users are encouraged to migrate their services from the legacy 1.25-degree hazard data sets to the new 0.25-degree version as soon as possible.

2.3 The MET SG/10 also noted planned upgrades to the WAFS in November 2023 that includes an upgrade in the horizontal, vertical and temporal resolution of all WAFS data sets. The new data includes: the provision of wind, temperature, relative humidity and geopotential height at 0.25-degree resolution; data at 1000ft flight level intervals; and data at 1-hourly intervals from 6-hours to 24-hours, three hourly intervals from 27-hours to 48-hours, and for wind and temperature data at 6-hourly intervals out to 120-hours.

2.4 Furthermore, an upgrade to the WAFS SIGWX forecasts in 2024 (*date to be confirmed*) between World Area Forecast Centres (WAFC) will be produced for 3-hourly intervals out to 2 days and better suited for the needs of short haul and ultra-long haul operations.

2.5 Lastly, MET SG/10 noted that in order to manage the significant increase in volume of data, the data delivery mechanism will be upgraded and be System Wide Information Management (SWIM)-compliant using Application Programmer Interface (API). Given the aforementioned, MET SG/10 agreed to the following Draft Conclusions for MIDANPIRG/20 consideration:

DRAFT CONCLUSION 10/1: 0.25-DEGREE WAFS HAZARD DATA

That, the SADIS users integrate the new 0.25-degree WAFS hazard data into systems and software prior to November 2023, if they have not already done so.

DRAFT CONCLUSION 10/2: ANNEX 3 AMENDMENT 81 WAFS AND SADIS UPGRADES

That, the SADIS users be invited to:

- a) familiarize themselves with the proposed WAFS and SADIS changes planned for November 2023 and 2024;*
- b) discuss the upcoming changes with their technical departments about how their organization could adapt to these technological changes; and*
- c) get involved in trying out the new Beta SADIS API's once they become available in late 2022 or 2023.*

2.6 For more information, States are invited to access the following link: <https://www.metoffice.gov.uk/services/transport/aviation/regulated/wafs-2023>.

ICAO MID IWXXM Implementation

2.7 The MET SG/10 Meeting recalled the ICAO MID IWXXM Implementation Webinar that was held virtually from 26 to 27 May 2021, which shared information on the background, requirements and best implementation practices of ICAO provisions and WMO means of compliance related to IWXXM.

2.8 The MET SG/10 Meeting recalled that provisions related to IWXXM became a requirement in Amendment 78 to Annex 3 applicable 5 November 2020. Specifically, the following MET related data shall be disseminated in IWXXM form in addition to TAC form: METAR and SPECI, TAF, SIGMET and AIRMET, Tropical Cyclone Advisory, Volcanic Ash Advisory and Space Weather Advisory Information. One of the main advantages of providing MET data in IWXXM format is that IWXXM is geo-referenced specifically to aeronautical information, which is needed to move towards a SWIM environment. Another main advantage is that national extensions are easier to support in IWXXM and additional information nationally (e.g. reporting wind at various altitudes on approach) can be provided in a standard format.

2.9 MET SG/10 noted that one main outcome of the Webinar was updating the status of IWXXM implementation for seven (7) States in the MID Region as provided at **Appendix A**.

2.10 MET SG/10 also noted that translation services were not available in the MID Region and that providing this service now may have a negative impact on implementation. Therefore, the focus should be on those States that have implemented IWXXM assist those States that have not yet done so. In addition, States that have not yet implemented IWXXM are urged to review *the Manual on the ICAO Meteorological Information Exchange Model* (ICAO Doc 10003), the *Guidelines for the Implementation of OPMET Data Exchange using IWXXM* (MID Doc 012), and Appendix H of the *EUR AMHS Manual* (EUR Doc 020) as well as the ICAO MID IWXXM Implementation Webinar material provided at the following website: <https://www.icao.int/MID/Pages/2021/>.

Proposed update to MID Doc 009 – MID Region SIGMET Guide

2.11 Since the MET SG/10 Meeting, the new Meteorological Watch Office (MWO) Qatar has been established to provide meteorological services for the Doha Flight Information Region (FIR) in accordance to ICAO Provisions. Consequently, updates to the *MID Region SIGMET Guide* (MID Doc 009) was necessary in order to include the WMO Headers for SIGMET and special air-reports. In addition, headers for the exchange of this information in IWXXM format for all MID States were included as provided at **Appendix B**.

2.12 Given the above, the meeting is invited to endorse the following draft Conclusion:

DRAFT MIDANPIRG CONCLUSION 20/XX: MID REGION SIGMET GUIDE

*That, the updated MID Region SIGMET Guide (MID Doc 009) as provided at **Appendix B** be endorsed and posted on the ICAO MID Website.*

3. ACTION BY THE MEETING

3.1 The meeting is invited to:

- a) endorse the Draft Conclusions in paragraph 2.5 and 2.12; and
- b) update the status of IWXXM implementation.

APPENDIX A

Table – Status of IWXXM Implementation in the MID Region

State	Expected implementation date	Comment
Bahrain		
Egypt		
Iraq		
Iran		
Jordan	Q3 2021	Upgraded MET-Switch; connection to COM expected shortly followed by conformance test
Kuwait	End 2021/ early 2022	
Lebanon	End 2023	
Libya		
Oman	End 2021/ early 2022	
Qatar	Mid 2021	Testing IWXXM v3.0 between MET and COM Centres
Saudi Arabia	Q2 2022	IWXXM v3.0
Sudan		
Syria		
United Arab Emirates	complete	Becoming compliant at national aerodromes
Yemen		

MIDANPIRG/20 & RASG-MID/10-WP/79
APPENDIX B

MID Doc 009



INTERNATIONAL CIVIL AVIATION ORGANIZATION
MIDDLE EAST AIR NAVIGATION PLANNING
AND IMPLEMENTATION REGIONAL GROUP
(MIDANPIRG)

MID REGION SIGMET GUIDE

EDITION. ~~2 FEBRUARY, 2017~~ 27 APRIL 2023

(73 pages)




TABLE OF CONTENTS

	Page
Part 1: Introduction	
1.1 General.....	1-1
Part 2: Responsibilities and coordination	
2.1 General.....	2-1
2.2 Meteorological watch office (MWO) responsibilities	2-1
2.3 Air traffic services (ATS) unit responsibilities.....	2-3
2.4 Pilot responsibilities	2-3
2.5 Coordination between MWOs and ATS units	2-4
2.6 Coordination between MWOs, VAACs, TCACs and State volcano observatories.....	2-4
Part 3: Procedures for preparation of SIGMET information	
3.1 General.....	3-1
3.2 SIGMET phenomena.....	3-1
3.3 Allowable abbreviations	3-2
3.4 SIGMET structure	3-3
3.5 SIGMET format.....	3-3
3.5.1 WMO header	3-4
3.5.2 First line of SIGMET.....	3-4
3.5.3 Structure of the meteorological part of SIGMET for weather phenomena other than for volcanic ash and tropical cyclone	3-5
3.5.4 Structure of the meteorological part of SIGMET for volcanic ash.....	3-
13 3.5.5 Structure of the meteorological part of SIGMET for tropical cyclone.....	3-
19 3.5.6 Cancellation of SIGMET	3-
21 3.5.7 Amendment of SIGMET	3-
22 3.6 Dissemination of SIGMET	3-
23	
Appendices	
Appendix A — SIGMET guidance table: Simplified from Annex 3 Table A6-1	A-1
Appendix B — SIGMET examples.....	B-1
Appendix C — SIGMET test procedures	C-1
Appendix D — SIGMET WMO headers - MID	D-1
Appendix E — Special air-report WMO headers - MID.....	E-1
Appendix F — SIGMET examples - MID	F-1

1. INTRODUCTION

1.1. General

- 1.1.1. The main purpose of this regional SIGMET guide is to provide guidance for standardization and harmonization of the procedures and formats related to the preparation and issuance of aeronautical meteorological information pertaining to specified en-route hazardous weather, and other phenomena in the atmosphere, which may affect safety of aircraft operations, known as SIGMET. The guidance is complementary to Annex 3 to the Convention on International Civil Aviation – *Meteorological Services for International Air Navigation*, the Standards and Recommended Practices (SARPs) contained therein regarding SIGMET, and to the SIGMET-related provisions in ICAO Regional Air Navigation Plans (ANPs).
- 1.1.2. The guidance is specifically provided for the provision of SIGMET in traditional alphanumeric code (TAC) form. As the provision and use of SIGMET data in digital form (IWXXM XML/GML) is used increasingly across ICAO communications networks it is expected that the conventions of the digital form will result in more compliant and less ambiguous SIGMET messages. During the period of transition, where it is likely that originating MWOs will issue both TAC and digital forms of SIGMET and until TAC SIGMET is formally retired, it is considered necessary to make available a guidance document of this form.
- 1.1.3. ICAO provisions concerning the preparation and issuance of SIGMET information are primarily contained in:
- Annex 3 - *Meteorological Service for International Air Navigation*, Part I, Chapters 3 and 7 and Part II, Appendix 6;
 - Annex 11 - *Air Traffic Services*, Chapter 4, 4.2.1 and Chapter 7, 7.1;
 - Regional Air Navigation Plans, Basic ANP, Part VI - Meteorology (MET);
 - Regional Air Navigation Plans, Volume II, FASID, Part VI – Meteorology (MET) FASID, Tables MET 1B, MET 3A and MET 3B;
 - *Procedures for Air Navigation Services – Air Traffic Management (PANS-MET*, Doc 4444), Chapter 9, 9.1.3.2;
 - Regional Supplementary Procedures (Doc 7030), Chapter 6, 6.13.2;
 - *ICAO Abbreviations and Codes* (Doc 8400);
 - *Handbook on the International Airways Volcano Watch (IAVW) – Operational Procedures and Contact List* (Doc 9766);
 - *Manual of Aeronautical Meteorological Practice* (Doc 8896), Chapters 1 and 4;
 - *Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services* (Doc 9377).
- 1.1.4. This regional SIGMET guide is primarily intended to assist meteorological watch offices (MWOs) in preparing and disseminating SIGMET information in conformance with the format prescribed in Annex 3. The explanations of the format to be used are accompanied by examples. The regional SIGMET guide also provides information regarding the necessary coordination between the MWOs, air traffic services (ATS), volcanic ash advisory centres (VAACs), tropical cyclone advisory centres (TCACs) and pilots, and their respective responsibilities.
- 1.1.5. To support regional management of SIGMET issuance and dissemination, Appendix C of the regional SIGMET guide contains guidance on the purpose, scope and procedures for conducting regional SIGMET tests.

2. RESPONSIBILITIES AND COORDINATION

2.1. General

- 2.1.1. SIGMET messages provide information on hazardous meteorological and other phenomena which may affect safety of aircraft operations; hence they are considered a high priority among other types of meteorological information provided to the aviation users. The primary purpose of SIGMET is for in-flight service, which requires timely transmission of the SIGMET messages to pilots by the ATS units and/or through VOLMET and D-VOLMET. Further information on the responsibilities of each party involved in the SIGMET process can be found in the *Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services* (Doc 9377).
- 2.1.2. Airlines are the main users of the SIGMET information. They contribute to the effectiveness of the SIGMET service through issuance of special air-reports reported by pilots to the ATS units. Special air-reports are among the most valuable sources of information for the MWOs in the preparation of SIGMET. The ATS units receiving special air-reports should forward them to their associated MWOs without delay.
- 2.1.3. In view of the foregoing, it should be well understood that the effectiveness of the SIGMET service depends strongly on the level of collaboration between the MWOs, ATS units, pilots, TCACs, VAACs and State volcano observatories. That is why, close coordination between these parties, as well as mutual understanding of their needs and responsibilities are essential for the successful implementation of the SIGMET service.
- 2.1.4. For the special cases of SIGMET for volcanic ash and tropical cyclones, the MWOs are provided with advisories from VAACs and TCACs respectively, as designated in the regional ANPs.
- 2.1.5. SIGMET is also used for flight planning. This requires global dissemination of SIGMET through the regional OPMET data banks (RODBs), the Internet-based SADIS FTP service and the WAFS Internet File Service (WIFS). SIGMET should also be distributed to the World Area Forecast Centres (WAFCs) London and Washington for use in the preparation of the significant weather (SIGWX) forecasts.

2.2. Meteorological watch office (MWO) responsibilities

- 2.2.1. SIGMET is to be issued by the MWO in order to provide timely information on the occurrence or expected occurrence of specified en-route weather and other phenomena in the atmosphere affecting the safety of the flight operations in the MWO's area of responsibility. SIGMET provides information concerning the location, extent, intensity and expected evolution of the specified phenomena.
- 2.2.2. Information about the provision of the SIGMET service, including details on the designated MWO(s), is to be included in the State's Aeronautical Information Publication (AIP) as required by Annex 15 – *Aeronautical Information Service*, Appendix 1, GEN 3.5.8.
- 2.2.3. If a State is temporarily unable to meet its obligations for establishing MWO(s) and for provision of SIGMET, arrangements have to be made for another State to assume this responsibility. Such delegation of responsibilities is to be agreed by the meteorological authority of each State concerned and should be notified by a NOTAM, within the State's AIP and in a letter to the ICAO Regional Office concerned.
- 2.2.4. The meteorological authority concerned should ensure that the MWO obligations and responsibilities are clearly defined and assigned to the unit designated to serve the

MWO. Corresponding operational procedures should be established and the meteorological staff should be trained accordingly.

- 2.2.5. In preparing SIGMET information MWOs should follow the format prescribed in Annex 3, Appendix 6, Table A6-1A. Whilst Table A6-1A is the authoritative source, Appendix A of this regional SIGMET guide, includes an enhanced SIGMET specific guidance based on Table A6-1A and provides more specific instructions on how SIGMET should be compiled. The aim is to ensure that SIGMET is produced reliably and consistently worldwide.
- 2.2.6. SIGMET must be issued only for those phenomena listed in Annex 3, Appendix 6, 1.1.4 and only when specified criteria for their intensity and spatial extent are met.
- 2.2.7. The MWOs should be adequately equipped in order to be able to identify, analyze and forecast those phenomena for which SIGMET is required. The MWO should make use of all available sources of information including:
- special air-reports passed to the MWO from ATS (voice communication);
 - special air-reports received from automated downlink;
 - numerical Weather Prediction (NWP) data, especially high resolution models where available;
 - meteorological observations, including those from automatic weather stations and human observers;
 - upper wind information;
 - information from meteorological satellites;
 - weather radar (including Doppler radar);
 - State volcano observatories;
 - International Atomic Energy Agency (IAEA) through the relevant World Meteorological Organization (WMO) Regional Specializes Meteorological Centre (RSMC) for radioactive cloud;
 - local knowledge;
 - volcanic ash or tropical cyclone advisory messages.
- 2.2.8. On receipt of a special air-report from the associated ACC or FIC, the MWO shall:
- a) issue SIGMET information based on the special-air report; or
 - b) send the special air-report for onward transmission to MWOs, WAFCs and other meteorological offices in accordance with regional air navigation agreement in the case that the issuance of SIGMET information is not warranted (e.g., the phenomenon concerned is of transient nature).
- 2.2.9. Appropriate telecommunication means should be available at the MWO in order to ensure timely dissemination of SIGMET according to a dissemination scheme, which should include transmission to:
- local ATS users;
 - aerodrome MET offices within its area of responsibility, where SIGMET is required for briefing and/or flight documentation;
 - other MWOs in accordance with regional air navigation plans;
 - Centres designated for transmission of VOLMET or D-VOLMET where SIGMET is required for those transmissions;
 - responsible ROBEX centres and regional OPMET data bank (RODB). It should be arranged that, through the ROBEX scheme, SIGMETs are sent to the designated RODB in the other ICAO regions, to the WAFCs and to the SADIS and WIFS providers;

- 2.2.10. In issuing SIGMET for tropical cyclones or volcanic ash, the MWOs should include as appropriate the advisory information received from the responsible TCAC or VAAC. In addition to the information received from the TCAC and VAAC, the MWOs may use the available complementary information from other reliable sources.

2.3. Air traffic service (ATS) unit responsibilities

- 2.3.1. Close coordination should be established between the MWO and the corresponding ATS unit (ACC or FIC) and arrangements should be in place to ensure:
- receipt without delay and display at the relevant ATS units of SIGMET issued by the associated MWO;
 - receipt and display at the ATS unit of SIGMETs issued by MWOs responsible for the adjacent FIRs/ACCs if these SIGMETs are required according to 2.3.4 below; and
 - transmission without delay by the ATS unit of special air-reports received through voice communication to the associated MWO.
- 2.3.2. SIGMET information should be transmitted to aircraft with the least possible delay on the initiative of the responsible ATS unit, by the preferred method of direct transmission followed by acknowledgement or by a general call when the number of aircraft would render the preferred method impracticable.
- 2.3.3. SIGMET information transmitted to aircraft-in-flight should cover a portion of the route up to two hours flying time ahead of the aircraft. SIGMET should be transmitted only during the time corresponding to their period of validity.
- 2.3.4. Air traffic controllers should ascertain whether any of the currently valid SIGMETs may affect any of the aircraft they are controlling, either within or outside the FIR/CTA boundary, up to two hours flying time ahead of the current position of the aircraft. If this is the case, the controllers should at their own initiative transmit the SIGMET promptly to the aircraft-in-flight likely to be affected. If necessary, the controller should pass to the aircraft available SIGMETs issued for the adjacent FIR/CTA, which the aircraft will be entering, if relevant to the expected flight route.
- 2.3.5. The ATS units concerned should also transmit to aircraft-in-flight the special air-reports received, for which SIGMET has not been issued. Once a SIGMET for the weather phenomenon reported in the special air report is made available this obligation of the ATS unit expires.

2.4. Pilot responsibilities

- 2.4.1. Timely issuance of SIGMET information is largely dependent on the prompt receipt by MWOs of special air-reports. It is essential that pilots prepare and transmit such reports to the ATS units whenever any of the specified en-route hazardous conditions are encountered or observed.
- 2.4.2. It should be emphasized that, even when automatic dependent surveillance (ADS) is being used for routine air-reports, pilots should continue to make special air-reports.
- 2.4.3. Pilots should compile special air-reports and disseminate to ATS by air-ground data link as per Annex 3, Appendix 4, 1.2 and *Procedures for Air Navigation Services – Air Traffic Management* (PANS-ATM, Doc 4444), 4.12.3.2, or by voice communication as per Annex 3, Appendix 4, 1.3 and PANS-ATM (Doc 4444), 4.12.3.3.

Note. — The MWO will compile special air-reports for uplink as per Annex 3, Appendix 6, and as reported using the instructions given PANS-ATM, Appendix 1.

2.5. Coordination between MWOs and ATS units

- 2.5.1. To achieve the best service to aviation and as part of the collaborative decision-making process, close coordination between the MWO and the ATS units is required. This is of particular importance for the avoidance of hazardous weather.
- 2.5.2. A Letter of Agreement between the ATS authority and the meteorological authority is also recommended (as per Annex 3, 4.2) to outline the responsibilities and coordination processes between the MWOs and ATS units.

2.6. Coordination between MWOs, VAACs, TCACs and State volcano observatories

- 2.6.1. Amongst the phenomena for which SIGMET information is required, volcanic ash and tropical cyclones are of particular importance.
- 2.6.2. Since the identification, analysis and forecasting of volcanic ash and tropical cyclones requires considerable scientific and technical resources, normally not available at each MWO, VAACs and TCACs have been designated to provide volcanic ash advisories and tropical cyclone advisories respectively to the users and assist the MWOs in the preparation of SIGMETs for those phenomena. Close coordination should be established between the MWO and its responsible VAAC and/or TCAC.
- 2.6.3. Information regarding the VAACs and TCACs areas of responsibility and lists of MWOs and ACC/FICs to which advisories are to be sent is provided in the regional ANPs FASID Tables MET 3A and MET 3B. Volcanic ash advisories and tropical cyclone advisories are required for global exchange through SADIS and WIFS as they are used by the operators during the pre-flight planning. Nevertheless, it should be emphasized that SIGMET information is still required especially for in-flight re-planning. SIGMETs should be transmitted to aircraft-in-flight through voice communication, VOLMET or D-VOLMET, thus providing vital information for making in-flight decisions regarding large-scale route deviations due to volcanic ash clouds or tropical cyclones.
- 2.6.4. Information from State volcano observatories is an important part of the process for issuance of volcanic ash advisories and SIGMETs. Information from a State volcano observatory should be in the form of a Volcano Observatory Notification for Aviation (VONA) and include information on significant pre-eruption volcanic activity, volcanic eruptions or the presence of volcanic ash clouds. Guidance including responsibilities for the issuance of the VONA is given in the *Handbook on the International Airways Volcano Watch (IAVW) – Operational Procedures and Contact List* (Doc 9766); the format of the VONA is given in Appendix E of the Doc 9766.

3. PROCEDURES FOR PREPARATION OF SIGMET INFORMATION

3.1. General

- 3.1.1. SIGMET is intended for transmission to aircraft in flight either by ATC or by VOLMET or D-VOLMET, and therefore, SIGMET messages should be kept concise. To this end, SIGMET information is prepared using approved ICAO abbreviations, a limited number of non-abbreviated words and, numerical values of a self-explanatory nature.
- 3.1.2. The increasing use of automated systems for handling the aeronautical meteorological information by the users makes it essential that all types of OPMET information, including SIGMET messages, are prepared and issued in the prescribed standardized format. Therefore, the format of the SIGMET message, as specified in Annex 3, Appendix 6, should be strictly followed by the MWOs.
- 3.1.3. The MWO should maintain watch over the evolution of the phenomenon for which a SIGMET has been issued. If the phenomenon persists or is expected to persist beyond the period of validity of the SIGMET, another SIGMET message for a further period of validity should be issued with updated information. SIGMETs for volcanic ash and tropical cyclone should be updated at least every 6 hours, while SIGMET for all other phenomena should be updated at least every 4 hours.
- 3.1.4. SIGMET should be promptly cancelled when the phenomenon is no longer occurring or no longer expected to occur in the MWO's area of responsibility.
- 3.1.5. Some SIGMET are generated using information from special air-reports (received by voice communications or data link (downlink)). The reporting of turbulence and icing used in special air-reports includes both moderate and severe categories (as per Doc 4444, Appendix 1).

Note. — Although the categories for the reporting, by pilots, of moderate and severe turbulence in special air-reports is provided in PANS-ATM (Doc 4444), some pilots report turbulence as “moderate to severe”. A MWO is then faced with determining which category to use in a special air-report (uplink) or in a SIGMET message for severe turbulence. Some States elect to treat such “moderate to severe” observations as ‘severe’ in the context of using the report to prompt the issuance of a special air-report (uplink) or a SIGMET message.

3.2. SIGMET phenomena

- 3.2.1. SIGMET shall only be issued for the phenomena listed in Table 1 below and only using the abbreviations as indicated.

Phenomena Abbreviation	Description
OBSC TS	Thunderstorms that are obscured by haze or smoke or cannot be readily seen due to darkness.
EMBD TS	Thunderstorms that are embedded within cloud layers and cannot be readily recognized by the pilot in command
FRQ TS	Frequent thunderstorms where, within the area of thunderstorms, there is little no separation between adjacent thunderstorms with a maximum spatial coverage greater than 75%.
SQL TS	A squall line indicating that a line of thunderstorms with little or no space between individual cumulonimbus clouds (CB).
OBSC TSGR	Thunderstorms with hail that are obscured by haze or smoke or cannot be readily seen due to darkness.
EMBD TSGR	Thunderstorms with hail that are embedded within cloud layers and cannot be readily recognized.

Phenomena Abbreviation	Description
FRQ TSGR	Frequent thunderstorms with hail, within the area of thunderstorms, there is little or no separation between adjacent thunderstorms with a maximum spatial coverage greater than 75%.
SQL TSGR	A squall line indicating that a line of thunderstorms with hail with little or no space between cumulonimbus clouds (CB).
TC	A tropical cyclone with a 10 minute mean surface wind speed of 17m/s (34 kt) or more.
SEV TURB	Severe turbulence referring to: <ul style="list-style-type: none"> • low-level turbulence associated with strong surface winds; • rotor streaming; or • clear air turbulence, whether in cloud or not in cloud. <i>Note. — Turbulence should not be used in connection with convective clouds. Severe turbulence shall be considered whenever the peak value of the cube root of EDR exceeds 0.7.</i>
SEV ICE	Severe icing not associated with convective cloud.
SEV ICE (FZRA)	Severe icing caused by freezing rain and not associated with convective cloud.
SEV MTW	Severe mountain wave the accompanying downdraft is 3 m/s (600 ft/min) or more or when severe turbulence is observed or forecast.
HVY DS	Heavy duststorm where the visibility is below 200 m and the sky is obscured.
HVY SS	Heavy sandstorm where the visibility is below 200 m and the sky is obscured.
VA	Volcanic ash
RDOACT CLD	Radioactive cloud

Table 1: SIGMET phenomena abbreviations and descriptions

3.3. Allowable abbreviations

3.3.1. Abbreviations that can be used in the meteorological section of SIGMET are given in Table 1 above and in Table 2 below.

Abbreviation	Meaning	Abbreviation	Meaning
ABV	Above	NE	North-east
APRX	Approximate or approximately	NNE	North-north-east
AT	At (followed by time)	NNW	North-north-west
BLW	Below	NM	Nautical miles
BTN	Between	NO	No
CB	Cumulonimbus cloud	NW	North-west
CLD	Cloud	OBS	Observe or observed or observation
CNL	Cancel or cancelled	PSN	Position
E	East or eastern longitude	S	South or southern latitude
ENE	East-north-east	SE	South-east
ESE	East-south-east	SFC	Surface
EXP	Expect or expected or expecting	SSE	South-south-east
FCST	Forecast	SSW	South-south-west
FIR	Flight information region	STNR	Stationary

Abbreviation	Meaning	Abbreviation	Meaning
FL	Flight level	SW	South-west
FT	Feet	TO	To
INTSF	Intensify or intensifying	TOP	Cumulonimbus cloud top (height)
KM	Kilometres	W	West or western longitude
KT	Knots	WI	Within (area)
LCA	Location	WID	Width or wide
M	Metres	WKN	Weaken or weakening
MOV	Move or moving or movement	WNW	West-north-west
MT	Mountain	WSW	West-south-west
N	North or northern latitude	Z	Coordinated Universal Time
NC	No change		

Table 2: SIGMET phenomena abbreviations and descriptions.

3.4. SIGMET structure

3.4.1. A SIGMET message consists of:

- **WMO Abbreviated Heading Line (WMO AHL)** – all SIGMETs are preceded by an appropriate WMO AHL;
- **First line**, containing location indicators of the respective ATS unit and MWO, sequential number and period of validity;
- **SIGMET main body**, containing information concerning the observed or forecast phenomenon for which the SIGMET is issued together with its expected evolution within the period of validity;

3.5. SIGMET format

Note. — In the following text, square brackets - [] - are used to indicate an optional or conditional element, and angled brackets - < > - for symbolic representation of a variable element, which in a real SIGMET accepts a discrete numerical value.

3.5.1. WMO header

T₁T₂A₁A₂ii CCCC YYGGgg [BBB]

3.5.1.1. The group **T₁T₂A₁A₂ii** is the bulletin identification (WMO AHL) for the SIGMET message. It is constructed in the following way:

T₁T₂	Data type designator	WS – for SIGMET for phenomena other than volcanic ash cloud or tropical cyclone WC – for SIGMET for tropical cyclone WV – for SIGMET for volcanic ash
A₁A₂	Country or territory designators	Assigned according to Table C1, Part II of <i>Manual on the Global Telecommunication System, Volume I – Global Aspects</i> (WMO Publication No. 386)
ii	Bulletin number	Assigned on national level according to p 2.3.2.2, Part II of <i>Manual on the Global Telecommunication System, Volume I – Global Aspects</i> (WMO Publication No. 386)

Table 3: Specification of the WMO Abbreviated Header Line for SIGMET

Note 1 — Tropical cyclone and volcanic ash cloud SIGMETs will be referred to hereafter as WC SIGMET (due to the T₁T₂ section of the WMO AHL being set to WC) and WV SIGMET (due to the T₁T₂ section of the WMO AHL being set to WV) respectively. All other SIGMET types will be referred to by WS (due to the T₁T₂ section of the WMO AHL being set to WS).

Note 2. — WMO AHLs for SIGMET bulletins used by [INSERT REGION NAME] MWOs are listed in Appendix D to this SIGMET Guide.

3.5.1.2. **CCCC** is the ICAO location indicator of the communication centre disseminating the message (this may be the same as the MWO location indicator).

3.5.1.3. **YYGGgg** is the date/time group; where **YY** is the day of the month and **GGgg** is the time of transmission of the SIGMET in hours and minutes UTC (normally this time is assigned by the disseminating (AFTN) centre).

Examples:

WSTH31 VTBS 121200

WVJP31 RJTD 010230

WCNG21 AYPY 100600

3.5.2. First line of SIGMET

CCCC SIGMET [n][n]n VALID YYGGgg/YYGGgg CCCC-

3.5.2.1. The meaning of the groups in the first line of the SIGMET is as follows:

CCCC	ICAO location indicator of the ATS unit serving the FIR or CTA to which the SIGMET refers
SIGMET	Message identifier
[n][n]n	Daily sequence number (see 3.5.2.2)
VALID	Period of validity indicator
YYGGgg/YYGGgg	Validity period of the SIGMET given by date/time group of the beginning and date/time group of the end of the period (see 3.5.2.3)
CCCC	ICAO location indicator of the issuing MWO
-	Mandatory hyphen to separate the preamble from the text

Table 4: Elements making up the first line of SIGMET

3.5.2.2. The numbering of SIGMETs starts every day at 0001 UTC. The sequence number should consist of up to three alphanumeric characters and may be a combination of letters and numbers, such as:

- 1, 2, ...
- 01, 02, ...
- A01, A02, ...

Examples:

RPMM SIGMET 3 VALID 121100/121700 RPLL-
WSJC SIGMET A04 VALID 202230/210430 WSSS-

Note 1. — No other combinations should be used, like “**CHARLIE 05**” or “**NR7**”.

Note 2. — Correct numbering of SIGMET is very important since the number is used for reference in communication between ATC and pilots and in VOLMET and D-VOLMET.

Note 3. — In accordance with Annex 5 – Units of Measurement to be Used in Air and Ground Operations, when the validity period begins or ends at midnight, YY should be set for the following day and GGgg should be '0000'. i.e. SIGMET validity ending at midnight on the 23rd day of the month should be expressed as '240000'.

3.5.2.3. The following regulations apply when determining the validity period:

- The period of validity of a **WS** SIGMET should not be more than 4 hours;
- The period of validity of a **WC** or **WV** SIGMET should not be more than 6 hours;
- In case of a SIGMET for an observed phenomenon, the filing time (date/time group in the WMO header) should be the same or very close to the time in the date/time group indicating the start of the SIGMET validity period;
- When the SIGMET is issued for a forecast phenomenon:
 - o the beginning of validity period should be the time of the expected commencement (occurrence) of the phenomenon in the MWO area of responsibility;
 - o the time of issuance of a **WS** SIGMET should not be more than 4 hours before the start of validity period (i.e., expected time of occurrence of the phenomenon); and for **WC** (tropical cyclone) and **WV** (volcanic ash) SIGMET the lead time should not be more than 12 hours.

3.5.2.4. The period of validity is that period during which the SIGMET information is valid for transmission to aircraft in flight.

Examples:

1) First two lines of a SIGMET for an observed phenomenon:

```
WSTH31 VTBS 241120  
VTBB SIGMET 3 VALID 241120/241500 VTBS-
```

2) First two lines of a SIGMET for a forecast phenomenon (expected time of occurrence 1530)

```
WSSR20 WSSS 311130  
WSJC SIGMET 1 VALID 311530/311930 WSSS-
```

3.5.3. Structure of the meteorological part of SIGMET

3.5.3.1. The meteorological part of a SIGMET for the phenomena consists of elements as shown in the table below.

Start of the second line of the message

1	2	3	4	5	6	7	8	9
Name of the FIR/UIR or CTA (M)	Phenomenon (M)	Observed or forecast phenomenon (M)	Location (C)	Level (C)	Movement or expected movement (C)	Changes in intensity (C)	Forecast time (C)	Forecast position (C)
See 3.5.3.2	See 3.5.3.3	See 3.5.3.4	See 3.5.3.5	See 3.5.3.6	See 3.5.3.7	See 3.5.3.8	See 3.5.3.9	See 3.5.3.10

Table 5: Elements making up the meteorological part of SIGMET.

Note 1) Item 6, 'Movement or expected movement' should not be used if the 'forecast time' and 'forecast position' elements are used.

Note 2) M = inclusion mandatory, part of every message. C = inclusion conditional, include whenever applicable.

3.5.3.2. Name of the FIR/UIR or CTA

CCCC <name> FIR[/UIR]

or

CCCC <name> CTA

The ICAO location indicator and the name of the FIR/CTA are given followed by the appropriate abbreviation: FIR, FIR/UIR or CTA. The name may consist of up to 10 characters.

Examples:

VTBB BANGKOK FIR

3.5.3.3. Phenomenon

The phenomenon description consists of a qualifier and a phenomenon abbreviation. SIGMET should be issued only for the following phenomena observed and forecast to persist for more than a transitory period.:

- thunderstorms – if they are **OBSC**, **EMBD**, **FRQ** or **SQL** with or without hail (**GR**);
- turbulence – only **SEV**
- icing – only **SEV** with or without **FZRA**
- mountain waves – only **SEV**
- dust storm – only **HVY**
- sand storm – only **HVY**
- radioactive cloud – **RDOACT CLD**

For volcanic ash SIGMET (WV) only, the following conventions should be used

In the case when the eruption is from a previously unknown or un-named volcano.

VA ERUPTION PSN Nnn[nn] or Snn[nn] Ennn[nn] or Wnnn[nn] VA CLD

In the case when the eruption is from a known and named volcano. The name may be up to 10 alphanumeric characters.

VA ERUPTION MT nnnnnnnnnn PSN Nnn[nn] or Snn[nn] Ennn[nn] or Wnnn[nn] VA CLD

In the case when a region of volcanic ash cloud is known to exist, but the precise origin of its source is unknown (the ash cloud may be of large horizontal extent, and obscuring the precise vent from which it emanates, and is otherwise in an area sparse of observation to identify the source).

VA CLD

For tropical cyclone SIGMET (WC) only, the following conventions should be used

In the case when the tropical cyclone is known and named. The name may be up to 10 alphanumeric characters.

**TC nnnnnnnnnn PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]
CB**

In the case when the tropical cyclone is not yet named.

TC NN PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB

The appropriate abbreviations and combinations, and their meaning are given in Table 1.

3.5.3.4. Indication whether the phenomenon is observed or forecast

OBS
or
OBS AT GGggZ
or
FCST
or
FCST AT GGggZ

The indication whether the phenomenon is observed or forecast is given by using the abbreviations **OBS** or **FCST**. **OBS AT** and **FCST AT** may be used, in which case they are followed by a time group in the form **GGggZ**. If the phenomenon is observed, **GGggZ** is the time of the observation in hours and minutes UTC. If the exact time of the observation is not known the time is not included. When the phenomenon is based on a forecast without a reported observation, the time given for **GGggZ** represents the time of commencement of the validity period.

Examples:

OBS
OBS AT 0140Z
FCST
FCST AT 0200Z

3.5.3.5. Location of the phenomenon

The location of the phenomenon is given with reference to geographical coordinates (latitude and longitude). Latitude and longitude may be reported in degrees, or in degrees and minutes. When reporting in degrees the format will be **Nnn** or **Snn** for latitude, and **Ennn** or **Wnnn** for longitude.

When reporting in degrees and minutes the format will be **Nnnnn** or **Snnnn** for latitude, and **Ennnnn** or **Wnnnnn** for longitude. The MWOs should try to be as specific as possible in reporting the location of the phenomenon and, at the same time, to avoid overwhelming the SIGMET with too many coordinates, which may be difficult to process or follow when transmitted by voice radio.

The following are the possible ways to describe the location of the phenomenon:

- 1) An area of the FIR defined by a polygon. Minimum 4 coordinates¹, and not normally more than 7 coordinates. This is the format preferred operationally by users.

Symbolically, this is indicated as:

WI <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or <Ennn[nn]> -
 <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>

For example:

**WI N6030 E02550 - N6055 E02500 - N6050 E02630 -
 N6030 E02550**

WI N60 E025 - N62 E027 - N58 E030 - N59 E026 - N60 E025

Note. — The points of a polygon should be provided in a clockwise order, and the end point should be a repeat of the start point.

Use of polygons with complex FIR boundaries.

Annex 3 (19th Edition, July 2016) specifies that the points of a polygon '... should be kept to a minimum and should not normally exceed seven'. However, some FIR boundaries are complex, and it would be unrealistic to expect that a polygon would be defined that followed such boundaries exactly. As such, some States have determined that the polygon points be chosen in relation to the complex boundary such that the FIR boundary approximates, but is wholly encompassed by, the polygon, and that any additional area beyond the FIR boundary be the minimum that can be reasonably and practically described. Caution should however be exercised in those instances where international aerodromes are located in close proximity to such a complex FIR boundary. Appendix B provides examples and advice with regard to describing such areas.

- 2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and end points on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at that point).

Symbolically this is indicated as:

¹ Including the last point as a repeat of the first point to explicitly close the polygon
 3-9

<N OF> or <NE OF> or <E OF> or <SE OF> or <S OF> or
<SW OF> or <W OF> or <NW OF> LINE <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]> - <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>

For example:

NE OF LINE N2500 W08700 - N2000 W08300

W OF LINE N20 E042 - N35 E045

- 2b) In a sector of the FIR defined as being **between** two specified lines, or **between** two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).

<N OF> or <NE OF> or <E OF> or <SE OF> or <S OF> or
<SW OF> or <W OF> or <NW OF> LINE <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]> - <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>[- <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>][- <Nnn[nn]> or
<Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>] AND <N OF> or <NE
OF> or <E OF> or <SE OF> or <S OF> or <SW OF> or <W
OF> or <NW OF> LINE <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]>
or <Ennn[nn]> - <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]> [- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>][- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>]

For example:

**NE OF LINE N2500 W08700 - N2000 W08300 AND SW OF LINE
N2800 W08500 - N2200 W08200**

**W OF LINE N20 E042 - N35 E045 AND E OF LINE N20 E039 -
N35 E043**

- 2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant);

Symbolically this is indicated as:

<N OF> or <S OF> <Nnn[nn]> or <Snn[nn]> AND
<E OF> or <W OF> <Wnnn[nn]> or <Ennn[nn]>

For example:

N OF N1200 AND E OF W02530

S OF N60 AND W OF E120

- 2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment), where a coordinate of latitude (or longitude) defines a line, and the preceding descriptor defines on which side of the line the phenomena is expected

Symbolically, this is indicated as:

<N OF> or <S OF> <Nnn[nn]> or <Snn[nn]> or
<E OF> or <W OF> <Wnnn[nn]> or <Ennn[nn]>

For example:

N OF S2230

W OF E080

- 3) Defined by a 'corridor' of specified width, centred upon a line, of up to three connected segments, described by;

APRX nnKM WID LINE BTN <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]>
or <Ennn[nn]> - <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>[- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>][- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>]

or

APRX nnNM WID LINE BTN <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]>
or <Ennn[nn]> - <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>[- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>][- <Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or
<Ennn[nn]>]

- 4) At a specific point within the FIR, indicated by a single coordinate of latitude and longitude.

Symbolically, this is indicated as:

<Nnn[nn]> or <Snn[nn]> <Wnnn[nn]> or <Ennn[nn]>

For example:

N5530 W02230

S23 E107

- 5) Within a specified radius of the centre of a tropical cyclone.

Symbolically, this is indicated as:

WI nnnKM OF TC CENTRE
WI nnnNM OF TC CENTRE

- 6) A reference to the whole FIR, FIR/UIR, or CTA .

Symbolically, this is indicated as:

ENTIRE FIR[/UIR]

ENTIRE CTA

More detail on reporting the location of the phenomenon is given in the examples provided in **Appendix B** to this guide.

3.5.3.6. Flight level

Symbolically, the options permitted are:

FLnnn
or
nnnnM
or
[n]nnnnFT
or
SFC/FLnnn
or
SFC/nnnnM
or
SFC/[n]nnnnFT
or
FLnnn/nnn
or
TOP FLnnn
or
ABV FLnnn
or
TOP ABV FLnnn
or
TOP BLW FLnnn (only to be used for tropical cyclone)
or
nnnn/nnnnM
or
[n]nnnn/[n]nnnnFT
or
nnnnM/FLnnn
or
[n]nnnnFT/FLnnn

In more detail, the location or extent of the phenomenon in the vertical is given by one or more of the above methods, as follows:

1) reporting at a single flight level

For example: **FL320**

2) reporting at a single geometric level, in metres or feet

For example: **4500M or 8250FT or 12000FT**

3) reporting a layer extending from the surface to a given height in meters, feet or flight level

For example: **SFC/3000M or SFC/9900FT or SFC/11000FT or SFC/FL350**

4) reporting a layer extending from a given FL to a higher flight level

For example: **FL250/290**

5) reporting a layer where the base is unknown, but the top is given:

For example: **TOP FL350**

6) reporting phenomenon above a specified flight level, but where the upper limit is unknown:

For example: **ABV FL350**

7) reporting phenomenon that has an unknown lower limit, but has an upper limit that is known to extend above a known flight level:

For example: **TOP ABV FL350**

8) reporting phenomenon expected between a lower and upper geometric level expressed in metres or feet:

For example: **3500/9000M or 8000/12000FT or 11000/14000FT**

9) reporting phenomenon expected between a lower geometric level expressed in metres or feet and a higher flight level:

For example: **4000M/FL220 or 6000FT/FL140 or 11000FT/FL190**

10) reporting the CB upper limit for tropical cyclone SIGMET

For example: **TOP BLW FL450**

Additional examples:

EMBD TS ... TOP ABV FL340
SEV TURB ... FL180/210
SEV ICE ... SFC/FL150
SEV MTW ... FL090

3.5.3.7. Movement

Note. — Footnote 24 to Table A6-1A of ICAO Annex 3 states that “The elements ‘Forecast Time’ and ‘Forecast Position’ are not to be used in conjunction with the element ‘Movement or Expected Movement’”.

Rate of movement is indicated in the following way:

MOV <direction> <speed>KMH[KT]
or
STNR

Direction of movement is given with reference to one of the sixteen points of compass (N, NNE, NE, ENE, E, ESE, SE, SSE, S, SSW, SW, WSW, W, WNW, NW, NNW). Speed is given in KMH or KT. The abbreviation STNR is used if no significant movement is expected.

Examples:

MOV NNW 30KMH
MOV E 25KT
STNR

Note – Movement information should not be provided when a forecast position is explicitly given

3.5.3.8. Expected changes in intensity

The expected evolution of the phenomenon’s intensity is indicated by one of the following abbreviations:

INTSF
or
WKN
or
NC

3.5.3.9. Forecast time

This section is used, with ‘Forecast position’ to explicitly provide a forecast of the position of the phenomena at the time specified. The format is fixed, and is of the form

FCST AT nnnnZ

for example

FCST AT 1600Z

where the forecast time is the same as the SIGMET validity end time.

Note. — In accordance with Annex 5 – Units of Measurement to be Used in Air and Ground Operations, when the validity period ends at midnight, YY should be set for the following day and GGgg should be '0000'. i.e. SIGMET validity ending at midnight on the 23rd day of the month should be expressed as '240000'.

3.5.3.10. Forecast position of the hazardous phenomenon at the end of the validity period of the SIGMET message

The available methods of describing the forecast position of the phenomenon in the 'Forecast position' section is exactly as detailed in section 3.5.3.5 with the addition of:

- a) The forecast centre position of a tropical cyclone is given by:

TC CENTRE PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]

TC CENTRE PSN N2740 W07345

- b) For volcanic ash which is not expected to be present within the FIR at the end of the validity of the SIGMET, the following is permitted:

NO VA EXP

Note. — Currently, there is no provision for indicating changes to the levels affected by phenomena between the initial position and the forecast position. As such, and as per footnote 28 to Table A6-1A of Annex 3 (19th Edition, July 2016), it should be assumed that the levels affected remain the same for both initial and forecast positions. If levels differ significantly then separate SIGMET should be issued.

3.5.3.11. Repetition of elements (volcanic ash and tropical cyclone SIGMET only)

Inclusion of instances of volcanic ash phenomenon and tropical cyclone phenomenon in the same SIGMET is permitted for volcanic ash and tropical cyclone only.

With regard to the portrayal of complex volcanic ash events (which implies areas of volcanic ash at different levels) guidance in this regard is provided in **Appendix B**.

With regard to the portrayal of two tropical cyclones, guidance is provided in **Appendix B**.

3.5.4. Cancellation of SIGMET

- 3.5.4.1. Annex 3, 7.1.2 requires that "SIGMET information shall be cancelled when the phenomena are no longer occurring or are no longer expected to occur in the area".

- 3.5.4.2. As such, it is mandatory for an MWO to cancel any SIGMET that is currently valid but for which the specified phenomena no longer exists or is expected to exist.
- 3.5.4.3. The cancellation is done by issuing the same type of SIGMET (i.e. WS, WV or WC) with the following structure:
- WMO heading with the same data type designator;
 - First line that contains as period of validity the remaining time of the original period of validity;
 - Second line, which contains the name of the FIR or CTA, the combination CNL SIGMET, followed by the sequence number of the original SIGMET and its original validity period.
- 3.5.4.4. A cancellation SIGMET should have a unique sequence number, and should follow the format below.

For a SIGMET that is cancelled during its period of validity, the cancellation SIGMET will be of the form:

As an example, an original SIGMET of:

```
YMMM SIGMET A01 VALID 260300/260700 YPRF-
YMMM MELBOURNE FIR EMBD TS FCST WI S4000 E12000 - S3830 E12200
- S4200 E12100 - S4000 E12000 TOP FL450 MOV SW 05KT INTSF=
```

If it were to be cancelled early (i.e. prior to 0700 UTC), then the following would be appropriate:

```
YMMM SIGMET A02 VALID 260600/260700 YPRF-
YMMM MELBOURNE FIR CNL SIGMET A01 260300/260700=
```

Where:

- the sequence number will be the next incrementing, unique sequence number.
- the validity time will be the time remaining between issuance and the end time of the original SIGMET.
- the sequence number of the original (and to be cancelled) SIGMET shall follow 'CNL SIGMET '.
- the original validity time of the original (and to be cancelled) SIGMET shall be included in the message after the reference to the original SIGMET's sequence number.

For SIGMET for volcanic ash only, the following is permitted:

```
WSAU21 ADRM 202155
YBBB SIGMET E03 VALID 202155/210000 YPDM-
YBBB BRISBANE FIR CNL SIGMET E01 202000/210000 VA MOV TO WXYX
FIR=
```

Where the FIR (WXYX in the example) into which the volcanic ash has moved is indicated.

3.5.5. Amendment/correction of SIGMET

- 3.5.5.1. If it is known that an existing SIGMET no longer accurately describes the existing or expected future evolution of the phenomena a new SIGMET, correctly describing the hazard should be issued, followed immediately by a cancellation of the original, erroneous SIGMET.

The new SIGMET should be issued before the cancellation in order to ensure there is always a SIGMET in force and that the cancellation is not mistakenly understood to mean that the hazard has completely dissipated.

Originally issued SIGMET, later determined to no longer be accurate (bold text identifies points that will be changed):

```
WSAU21 ADRM 201855
YBBB SIGMET E01 VALID 202000/210000 YPDM-
YBBB BRISBANE FIR SEV TURB FCST WI S1530 E13700 - S1900 E13730
- S2000 E13130 - S1600 E13500 - S1530 E13700 SFC/FL120 MOV SE
12KT WKN=
```

Updated SIGMET (bold text identifies points that have been changed):

```
WSAU21 ADRM 202155
YBBB SIGMET E02 VALID 202200/210000 YPDM-
YBBB BRISBANE FIR SEV TURB FCST WI S1530 E13700 - S2000 E13750
- S2045 E13245 - S1600 E13500 - S1530 E13700 SFC/FL120 MOV SE
12KT WKN=
```

Cancellation SIGMET (this cancels the original SIGMET):

```
WSAU21 ADRM 202156
YBBB SIGMET E03 VALID 202155/210000 YPDM-
YBBB BRISBANE FIR CNL SIGMET E01 202000/210000=
```

Note, it is essential that the times of issuance of the updated (correct) SIGMET and the cancellation are separated by at least one minute to prevent inadvertent suppression by message switches. However, it is also important that the minimum delay between issuance of the updated and the cancellation messages.

3.6. Dissemination of SIGMET

- 3.6.1. SIGMET is part of operational meteorological (OPMET) information. According to Annex 3, the telecommunication facilities used for the exchange of the operational meteorological information should be the aeronautical fixed service (AFS).
- 3.6.2. The AFS consists of a terrestrial segment, AFTN or ATN (AMHS), as well as the Internet-based SADIS FTP and WIFS services provided by WAFC London and WAFC Washington respectively. Note that SIGMET priority indicator is **FF** for flight safety messages (Annex 10, Volume II, 4.4.1.1.3 refers).
- 3.6.3. Currently, AFTN links should be used by the MWOs to send the SIGMET, as follows:
 - to the adjacent MWOs and ACCs² using direct AFTN addressing;
 - when required for VOLMET or D-VOLMET, SIGMET should be sent to the relevant centre providing the VOLMET service;
 - SIGMET should be sent to all regional OPMET Data Banks (RODB);

² For this dissemination it is required that SIGMET is available at the ACCs for transmission to aircraft in flight for the route ahead up to a distance corresponding to two hours flying time.

- it should be arranged that SIGMET is relayed to the SADIS and WIFS providers for satellite/public internet dissemination, as well as to the WAFCS London and Washington, either through the ROBEX scheme, or directly by the issuing MWO;
- SIGMET for volcanic ash should be disseminated to the responsible VAAC.

3.6.4. Through SADIS and WIFS, SIGMET is disseminated to all authorised users. In this way, SIGMET is available on a global basis, meeting the aeronautical requirements.

APPENDIX A

ENHANCED SIGMET GUIDANCE TABLE DEVELOPED FROM ANNEX 3 TABLE A6-1A

Note. — The table below seeks to provide more detailed guidance than that given in Table A6-1A of Annex 3 (19th Edition, July 2016). It does this by removing all references to the AIRMET message. Table A6-1A. The table below simplifies the available options and provides more specific expansion of the symbolic structure of SIGMET messages, with guidance sub-titles where appropriate. It should be noted that Annex 3, Appendix 6, Table A6-1A remains the authoritative reference.

Ref No.	Element as specified in Chapter 5 and Appendix 6	Detailed Content	Expanded symbolic - These 'expanded' symbolic representations of the various SIGMET code elements represent the interpretation of Table A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the guidelines below.	Examples. These examples of various SIGMET code elements represent the interpretation A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the examples below.
1.1	Location indicator of FIR/CTA (M) ¹	ICAO location indicator of the ATS unit serving the FIR or CTA to which the SIGMET refers	nnnn	YUCC ² YUDD ²
1.2	Identification (M)	Message identification and sequence number ³	SIGMET n SIGMET nn SIGMET nnn	SIGMET 1 SIGMET 01 SIGMET A01
1.3	Validity period (M)	Day-time groups indicating the period of validity in UTC	VALID nnnnnn/nnnnnn	VALID 010000/010400 VALID 221215/221600 VALID 101520/101800 VALID 251600/252200 VALID 152000/160000 VALID 192300/200300 VALID 122200/130400 (6 hour validity applicable to TC or VA only)
1.4	Location indicator of MWO (M)	Location indicator of MWO originating the message with a separating hyphen	nnnn-	YUDO ⁻² YUSO ⁻²
1.5	Name of the FIR/CTA	Location indicator and name of the FIR/CTA ⁴ for which the SIGMET is issued	nnnn nnnnnnnnnn FIR nnnn nnnnnnnnnn FIR/UIR nnnn nnnnnnnnnn CTA	YUCC AMSWELL FIR ² YUDD SHANLON FIR/UIR ² YUDD SHANLON FIR ² YUCC AMSWELL CTA ²

Ref No.	Element as specified in Chapter 5 and Appendix 6	Detailed Content	Expanded symbolic - These 'expanded' symbolic representations of the various SIGMET code elements represent the interpretation of Table A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the guidelines below.	Examples. These examples of various SIGMET code elements represent the interpretation A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the examples below.
2.1	Phenomenon (M) ⁵	Description of phenomenon causing the issuance of SIGMET	OBSC ⁶ TS OBSC ⁶ TSGR ⁷ EMBD ⁸ TS EMBD ⁸ TSGR ⁷ FRQ ⁹ TS FRQ ⁹ TSGR ⁷ SQL ¹⁰ TS SQL ¹⁰ TSGR ⁷ TC nnnnnnnnnn PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB TC NN ¹¹ PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB SEV TURB ¹² SEV ICE ¹³ SEV ICE (FZRA) ¹³ SEV MTW ¹⁴ HVY DS HVY SS VA ERUPTION PSN Nnn[nn] or Snn[nn] Ennn[nn] or Wnnn[nn] VA CLD VA ERUPTION MT nnnnnnnnnn PSN Nnn[nn] or Snn[nn] Ennn[nn] or Wnnn[nn] VA CLD VA CLD RDOACT CLD	OBSC TS OBSC TSGR EMBD TS EMBD TSGR FRQ TS FRQ TSGR SQL TS SQL TSGR TC GLORIA PSN N2215 W07500 CB TC NN PSN S26 E150 CB SEV TURB SEV ICE SEV ICE (FZRA) SEV MTW HVY DS HVY SS VA ERUPTION PSN N27 W017 VA CLD VA ERUPTION PSN S1200 E01730 VA CLD VA ERUPTION MT ASHVAL ² PSN S15 E073 VA CLD VA ERUPTION MT VALASH ² PSN N2030 E02015 VA CLD VA CLD RDOACT CLD
2.2	Observed or forecast phenomenon (M)	Indication whether the information is observed and expected to continue, or forecast	OBS OBS AT nnnnZ FCST FCST AT nnnnZ	OBS OBS AT 1210Z FCST FCST AT 1815Z

Ref No.	Element as specified in Chapter 5 and Appendix 6	Detailed Content	Expanded symbolic - These 'expanded' symbolic representations of the various SIGMET code elements represent the interpretation of Table A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the guidelines below.	Examples. These examples of various SIGMET code elements represent the interpretation A6-1A of Annex 3. MWOs are encouraged to align their SIGMETs with the examples below.
2.3	Location (C) ¹⁹	Location (referring to latitude and longitude (in degrees and minutes))	<p>1) An area of the FIR defined by a polygon. The end point shall be a repeat of the start point. Minimum 4 coordinates (including the last point as a repeat of the first), and not normally more than 7 coordinates.</p> <p>WI^{20,21} Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]][- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>or</p> <p>2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and endpoints on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>[N][NE][E][SE][S][SW][W][NW] OF LINE²⁰ Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>or</p> <p>2b) In a sector of the FIR defined as being between two specified lines, or between two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>[N][NE][E][SE][S][SW][W][NW] OF LINE²⁰ Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] AND [N][NE][E][SE][S][SW][W][NW] OF LINE Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant):</p>	<p>1) An area of the FIR defined by a polygon. The end point shall be a repeat of the start point. Minimum 4 coordinates (including the last point as a repeat of the first), and not normally more than 7 coordinates.</p> <p>WI N6030 E02550 - N6055 E02500 - N6050 E02630 - N6030 E02550</p> <p>WI N30 W067 - N32 W070 - N35 W068 - N30 W067</p> <p>or</p> <p>2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and endpoints on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>NE OF LINE N2515 W08700 - N2000 W08330 S OF LINE S14E150 - S14 E155</p> <p>or</p> <p>2b) In a sector of the FIR defined as being between two specified lines, or between two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>SW OF LINE N50 W020 - N45 E010 AND NE OF LINE N45 W020 - N40 E010</p>

		<p>N OF Nnn[nn] AND W OF Wnnn[nn] <i>or</i> N OF Nnn[nn] AND E OF Wnnn[nn] <i>or</i> S OF Nnn[nn] AND W OF Wnnn[nn] <i>or</i> S OF Nnn[nn] AND E OF Wnnn[nn] <i>or</i> N OF Snn[nn] AND W OF Ennn[nn] <i>or</i> N OF Snn[nn] AND E OF Ennn[nn] <i>or</i> S OF Snn[nn] AND W OF Ennn[nn] <i>or</i> S OF Snn[nn] AND E OF Ennn[nn] <i>or</i></p> <p><i>or</i></p> <p>2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment):</p> <p>N OF Nnn[nn] <i>or</i> S OF Nnn[nn] <i>or</i> N OF Snn[nn] <i>or</i> S OF Snn[nn] <i>or</i> W OF Wnnn[nn] <i>or</i> E OF Wnnn[nn] <i>or</i> W OF Ennn[nn] <i>or</i> E OF Ennn[nn]</p> <p><i>or</i></p> <p>3) Defined by a 'corridor' of specified width, centred upon a line, of up to three connected segments, described by:</p> <p>APRX nnKM WID LINE²⁰ BTN Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]]</p> <p>APRX nnNM WID LINE²⁰ BTN Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]]</p> <p><i>or</i></p> <p>4) At a specific point within the FIR:</p>	<p>2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant):</p> <p>S OF N3200 AND E OF E02000 S OF S3215 AND W OF E10130 S OF N12 AND W OF E040 N OF N35 AND E OF E078</p> <p><i>or</i></p> <p>2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment):</p> <p>N OF S2230 S OF S43 E OF E01700 E OF W005</p> <p><i>or</i></p> <p>3) Defined by a 'corridor' of specified width, centred upon a line, of up to three connected segments, described by:</p> <p>APRX 50KM WID LINE BTN N64 W017 - N60 W010 - N57 E010 - N60 E015</p> <p>APRX 50NM WID LINE BTN S1530 W09500 - S1815 W10130 - S2000 W10300</p> <p><i>or</i></p> <p>4) At a specific point within the FIR:</p>
--	--	---	---

			<p>Nnn[nn] Wnnn[nn] <i>or</i> Nnn[nn] Ennn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Snn[nn] Ennn[nn]</p> <p><i>or</i></p> <p>5 tropical cyclone:</p> <p><i>or</i></p> <p>6) A reference to the whole FIR, FIR/UIR, or CTA</p> <p>ENTIRE FIR ENTIRE FIR/UIR ENTIRE CTA</p>	<p>N5530 W02230 S12 E177</p> <p><i>or</i></p> <p>5 tropical cyclone:</p> <p><i>or</i></p> <p>6) A reference to the whole FIR, FIR/UIR, or CTA</p> <p>ENTIRE FIR¹⁸ ENTIRE FIR/UIR ENTIRE CTA¹⁸</p>
2.4	Level (C) ¹⁹	Flight level or altitude ²³	<p>1) Generic height/range descriptors to be used when 'Location' descriptors above are used.</p> <p>FLnnn nnnnFT nnnnFT nnnnM SFC/FLnnn SFC/nnnnM SFC/nnnnFT SFC/nnnnFT FLnnn/nnn TOP FLnnn ABV FLnnn TOP ABV FLnnn nnnn/nnnnM [n]nnnn/[n]nnnnFT nnnnM/FLnnn [n]nnnnFT/FLnnn</p> <p><i>or</i>²²</p> <p>TOP BLW FLnnn</p>	<p>1) Generic height/range descriptors to be used when 'Location' descriptors above are used.</p> <p>FL180 7000FT 10000FT 600M 1200M SFC/FL070 SFC/9000FT SFC/10000FT SFC/2500M FL050/080 FL310/450 TOP FL390 ABV FL280 TOP ABV FL100 3000M 2000/3000M 8000FT 6000/12000FT 11000/14000FT 2000M/FL150 8000FT/FL190 10000FT/FL250</p> <p><i>or</i>²²</p> <p>TOP BLW FL450</p>

			^{or} 22 TOP ABV FLnnn	^{or} 22 TOP ABV FL360
2.5	Movement <i>or</i> expected movement (C) ^{19, 24}	Movement <i>or</i> expected movement (direction and speed) with reference to one of the sixteen points of compass, <i>or</i> stationary	MOV[N][NNE][NE][ENE][E][ESE][SE][SSE][S][SSW][SW][WSW]][W][WNW][NW][NNW] nnKMH <i>or</i> MOV[N][NNE][NE][ENE][E][ESE][SE][SSE][S][SSW][SW][WSW]][W][WNW][NW][NNW] nnKT <i>or</i> STNR	MOV E 40KMH MOV E 20KT MOV SE STNR
2.6	Changes in intensity ¹⁹	Expected changes in intensity (C)	INTSF <i>or</i> WKN <i>or</i> NC	WKN INTSF NC
2.7	Forecast time (C) ²⁴	Indication of the forecast time of the phenomena	FCST AT nnnZ	FCST AT 2200Z FCST AT 0000Z
2.7	Forecast position (C) ^{19, 24, 25}	Forecast position of volcanic ash cloud <i>or</i> the centre of the TC <i>or</i> other hazardous phenomena ²⁵ at the end of the validity period of the SIGMET message (C)	1) An area of the FIR defined by a polygon. The end point shall be a repeat of the start point. Minimum 4 coordinates (including the last point as a repeat of the first), and not normally more than 7 coordinates. WI ^{20, 21} Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]][- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] <i>or</i> 2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and endpoints on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points). [N][NE][E][SE][S][SW][W][NW] OF LINE ²⁰ Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]	1) An area of the FIR defined by a polygon. The end point shall be a repeat of the start point. Minimum 4 coordinates (including the last point as a repeat of the first), and not normally more than 7 coordinates. WI N6030 E02550 - N6055 E02500 - N6050 E02630 - N6030 E02550 WI N30 W067 - N32 W070 - N35 W068 - N30 W067 <i>or</i> 2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and endpoints on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points). NE OF LINE N2515 W08700 - N2000 W08330 S OF LINE S14 E150 - S14 E155

		<p>Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p><i>or</i></p> <p>2b) In a sector of the FIR defined as being between two specified lines, or between two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>[N][NE][E][SE][S][SW][W][NW] OF LINE²⁰ Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] AND [N][NE][E][SE][S][SW][W][NW] OF LINE Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant):</p> <p>N OF Nnn[nn] AND W OF Wnnn[nn] or N OF Nnn[nn] AND E OF Wnnn[nn] or S OF Nnn[nn] AND W OF Wnnn[nn] or S OF Nnn[nn] AND E OF Wnnn[nn] or N OF Snn[nn] AND W OF Ennn[nn] or N OF Snn[nn] AND E OF Ennn[nn] or S OF Snn[nn] AND W OF Ennn[nn] or S OF Snn[nn] AND E OF Ennn[nn] or</p> <p><i>or</i></p> <p>2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment):</p> <p>N OF Nnn[nn] or S OF Nnn[nn] or N OF Snn[nn] or S OF Snn[nn] or W OF Wnnn[nn] or E OF Wnnn[nn] or W OF Ennn[nn] or E OF Ennn[nn]</p>	<p><i>or</i></p> <p>2b) In a sector of the FIR defined as being between two specified lines, or between two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).</p> <p>SW OF LINE N50 W020 - N45 E010 AND NE OF LINE N45 W020 - N40 E010</p> <p>2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant):</p> <p>S OF N3200 AND E OF E02000 S OF S3215 AND W OF E10130 S OF N12 AND W OF E040 N OF N35 AND E OF E078</p> <p><i>or</i></p> <p>2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment):</p> <p>N OF S2230 S OF S43 E OF E01700 E OF W005</p>
--	--	--	--

		<p><i>or</i></p> <p>3) Defined by a 'corridor' of specified width, centred upon a line, of up to three connected segments, described by:</p> <p>APRX nnKM WID LINE²⁰ BTN Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]]</p> <p>APRX nnNM WID LINE²⁰ BTN Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] - Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]] [- Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]]</p> <p><i>or</i></p> <p>4) At a specific point within the FIR;</p> <p>Nnn[nn] Wnnn[nn] <i>or</i> Nnn[nn] Ennn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Snn[nn] Ennn[nn]</p> <p><i>or</i></p> <p>5 tropical cyclone;</p> <p>TC CENTRE PSN Nnn[nn] <i>or</i> Snn[nn] Wnnn[nn] <i>or</i> Ennn[nn]</p> <p><i>or</i></p> <p>6) A reference to the whole FIR, FIR/UIR, or CTA</p> <p>ENTIRE FIR ENTIRE FIR/UIR ENTIRE CTA</p> <p><i>or</i></p> <p>7) No volcanic ash expected²⁶</p>	<p><i>or</i></p> <p>3) Defined by a 'corridor' of specified width, centred upon the line described;</p> <p>APRX 50KM WID LINE BTN N64 W017 - N60 W010 - N57 E010 - N60 E015</p> <p>APRX 50NM WID LINE BTN S1530 W09500 - S1815 W10130 - S2000 W10300</p> <p><i>or</i></p> <p>4) At a specific point within the FIR;</p> <p>N5530 W02230 S12 E177</p> <p><i>or</i></p> <p>5 tropical cyclone;</p> <p>TC CENTRE PSN N1230 W04530</p> <p><i>or</i></p> <p>6) A reference to the whole FIR, FIR/UIR, or CTA</p> <p>ENTIRE FIR¹⁸ ENTIRE FIR/UIR ENTIRE CTA¹⁸</p> <p>7) No volcanic ash expected</p> <p>NO VA EXP</p>
--	--	--	--

		NO VA EXP	
Repetition of elements (C) ²⁷	Repetition of elements included in a SIGMET message for volcanic ash cloud or tropical cyclone	[AND] ²⁷	AND
Cancellation of SIGMET (C) ²⁸	Cancellation of SIGMET referring to its identification	CNL SIGMET n nnnnnn/nnnnnn CNL SIGMET nn nnnnnn/nnnnnn CNL SIGMET nnn nnnnnn/nnnnnn <i>or</i> CNL SIGMET n nnnnnn/nnnnnn VA MOV TO nnnn FIR ¹⁸ CNL SIGMET nn nnnnnn/nnnnnn VA MOV TO nnnn FIR ¹⁸ CNL SIGMET nnn 251030/251430 VA MOV TO YUDO FIR	CNL SIGMET 2 102000/110000 CNL SIGMET 12 101200/101600 CNL SIGMET A12 031600/032000 CNL SIGMET 3 251030/251630 VA MOV TO YUDO FIR CNL SIGMET 06 191200/191800 VA MOV TO YUDO FIR CNL SIGMET B10 030600/031200 VA MOV TO YUDO FIR

Formatted: French (France)

Formatted: French (France)

Formatted: French (France)

Table A-1: Expanded SIGMET template

Footnotes to table: (note, in order to ensure consistency between this document and ICAO Annex 3, Table 6-1A, any footnote in Table 6-1A that refers to AIRMET only is identified as such below.

1. See 4.1. **“Recommendation.**— *In cases where the airspace is divided into a flight information region (FIR) and an upper flight information region (UIR), the SIGMET should be identified by the location indicator of the air traffic services unit serving the FIR. Note.— The SIGMET message applies to the whole airspace within the lateral limits of the FIR, i.e. to the FIR and to the UIR. The particular areas and/or flight levels affected by the meteorological phenomena causing the issuance of the SIGMET are given in the text of the message.*”
2. Fictitious location.
3. In accordance with 1.1.3 “The sequence number referred to in the template in Table A6-1A shall correspond with the number of SIGMET messages issued for the flight information region since 0001 UTC on the day concerned. The meteorological watch offices whose area of responsibility encompasses more than one FIR and/or control area (CTA) shall issue separate SIGMET messages for each FIR and/or CTA within their area of responsibility.”
4. AIRMET only – not SIGMET
5. As per 1.1.4 “In accordance with the template in Table A6-1A, only one of the following phenomena shall be included in a SIGMET message, using the abbreviations as indicated below [list of SIGMET phenomena follows in section 1.1.4 – see section]”
6. In accordance with 4.2.1 a) “*obscured (OBSC) if it is obscured by haze or smoke or cannot be readily seen due to darkness*”.
7. In accordance with 4.2.4 “*Hail (GR) should be used as a further description of the thunderstorm, as necessary*”
8. accordance with 4.2.1 b) “*embedded (EMBD) if it is embedded within cloud layers and cannot be readily recognized*”
9. In accordance with 4.2.2 **“Recommendation.**— An area of thunderstorms should be considered frequent (FRQ) if within that area there is little or no separation between adjacent thunderstorms with a maximum spatial coverage greater than 75 per cent of the area affected, or forecast to be affected, by the phenomenon (at a fixed time or during the period of validity)”
10. In accordance with 4.2.3 **“Recommendation.**— Squall line (SQL) should indicate a thunderstorm along a line with little or no space between individual clouds.”
11. Used for unnamed tropical cyclones.
12. In accordance with 4.2.5 and 4.2.6 **“Recommendation.**— Severe turbulence (TURB) should refer only to: low-level turbulence associated with strong surface winds; rotor streaming; or turbulence whether in cloud or not in cloud (CAT). Turbulence should not be used in connection with convective clouds.” and “Turbulence shall be considered: a) severe whenever the peak value of the cube root of EDR exceeds 0.7”
13. In accordance with 4.2.7 **“Recommendation.**— Severe icing (ICE) should refer to icing in other than convective clouds. Freezing rain (FZRA) should refer to severe icing conditions caused by freezing rain”.
14. In accordance with 4.2.8 **“Recommendation.**— A mountain wave (MTW) should be considered: a) severe whenever an accompanying downdraft of 3.0 m/s (600 ft/min) or more and/or severe turbulence is observed or forecast; and b) moderate whenever an accompanying downdraft of 1.75–3.0 m/s (350–600 ft/min) and/or moderate turbulence is observed or forecast.”
15. AIRMET only – not SIGMET
16. AIRMET only – not SIGMET

17. AIRMET only – not SIGMET
18. AIRMET only – not SIGMET
19. In the case of the same phenomenon covering more than one area within the FIR, these elements can be repeated, as necessary.
20. A straight line is to be used between two points drawn on a map in the Mercator projection or between two points which crosses lines of longitude at a constant angle.
21. The number of coordinates should be kept to a minimum and should not normally exceed seven.
22. Only for SIGMET messages for tropical cyclones.
23. Only for SIGMET messages for volcanic ash cloud and tropical cyclones.
24. The elements “forecast time” and “forecast position” are not to be used in conjunction with the element “movement or expected movement”.
25. The levels of the phenomena remain fixed throughout the forecast period.
26. Only for SIGMET messages for volcanic ash.
27. To be used for two volcanic ash clouds or two centres of tropical cyclones simultaneously affecting the FIR concerned.
28. End of the message (as the SIGMET message is being cancelled).

Additional notes (not specifically identified in footnotes to Table 6-1A:

In accordance with 4.2.9 “Sandstorm/duststorm should be considered: a) heavy whenever the visibility is below 200 m and the sky is obscured; and b) moderate whenever the visibility is: 1) below 200 m and the sky is not obscured; or 2) between 200 m and 600 m.” (no footnote in Annex 3, but this is applicable reference)

APPENDIX B

SIGMET EXAMPLES

Note. — The figures used in this appendix are intended simply to clarify the intent of the SIGMET message in abbreviated plain language, and therefore how each SIGMET should be constructed by MWOs and also interpreted by users. The figures used are not intended to give guidance on how a SIGMET in graphical format should be produced.

Examples of 'ws' SIGMET. See the sections for SIGMET for volcanic ash only (WV) and SIGMET for tropical cyclone only (WC) for examples specific to those phenomena.

Contents


General

- 1) An area of the FIR defined by a polygon.
 Use of polygons with complex FIR boundaries.
- 2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and end points on the FIR boundary
- 2b) In a sector of the FIR defined as being *between* two specified lines, or *between* two series of up to three connected lines, each with start and endpoints on the FIR boundary
- 2c) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment)
- 2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment)
- 3) Defined by a 'corridor' of specified width, centred upon the line described;
- 4) At a specific point within the FIR
- 5) Covering entire FIR.
- 6 Additional examples using volcanic ash references applicable to volcanic ash SIGMET only
- 7) Additional examples using volcanic ash references applicable to multiple areas in SIGMET for volcanic ash.
- 8) Additional example using volcanic illustrating use of "WI nnnKM (or nnnNM) OF TC CENTRE " Tropical Cyclone SIGMET Only
- 9) Additional example using volcanic ash references applicable to multiple areas in SIGMET for tropical cyclone.


General

Explanation of fictional FIR.

In each of the examples below, a fictional FIR area is indicated, with portions of adjacent fictional FIRs also indicated. The FIR areas are overlaid on a coordinate grid, in order that the example plain language SIGMETs can be explicitly related to the intended meaning.

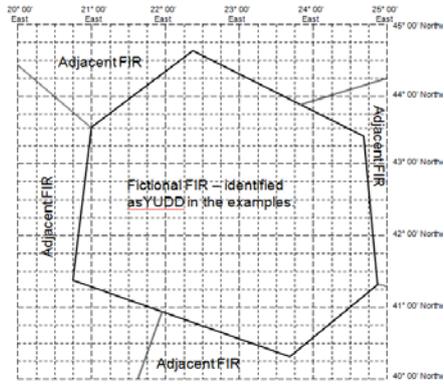

For some cases, examples are given where the FIR has boundaries that are complex (country borders for example, especially when defined by rivers)

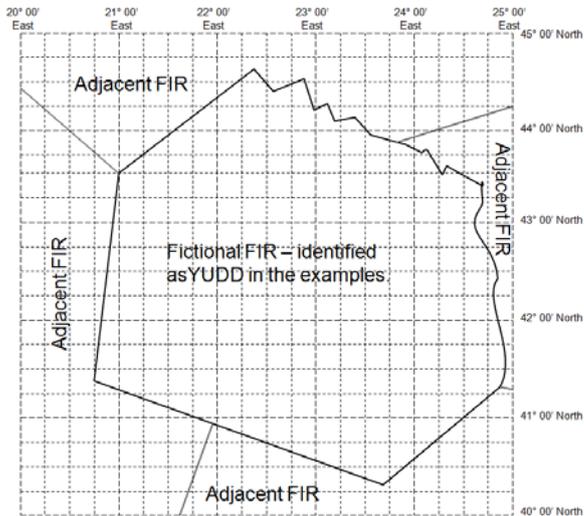

Fictional FIR 'Shanlon = YUDD' is used for the examples.

Repetition of start point as last coordinate.

In accordance with practices and procedures laid down for other aeronautical bulletins (i.e. NOTAM), it is recommended that the last point of a polygon is a repeat of the first point of the polygon. This will ensure that the polygon has been closed, and that no points have been accidentally omitted.

'Direction' of encoding of the points of a polygon


In accordance with practices and procedures laid down for other aeronautical bulletins and international practice (e.g. BUFR encoding of WAFS significant weather (SIGWX) forecasts), it is recommended that the points of a polygon are provided in a 'clockwise' sense. This assists automated systems in determining the 'inside' of polygons.

Use of 'Expected Movement' and 'Forecast Position'/'Forecast Time'.

With applicability of Amendment 77, the 'Expected Movement' element of SIGMET should not be used if the 'Forecast Position'/'Forecast Time' element is being used, and vice versa. This is to prevent duplication at best and inconsistencies at worst.


1) An area of the FIR defined by a polygon. The end point should be a repeat of the start point.

When the SIGMET does not include a 'forecast position' section.

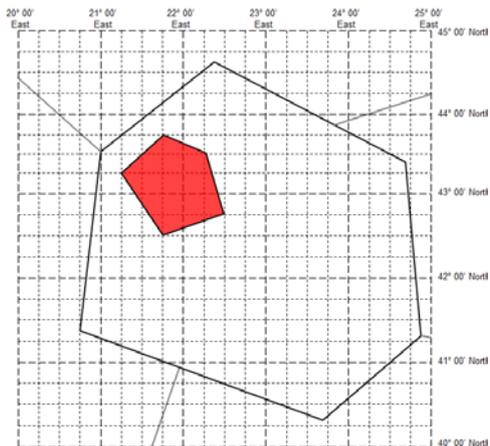


```
YUDD SIGMET 2 VALID 101200/101600 YUSO-  
YUDD SHANLON FIR/UIR SEV TURB FCST WI N4230 E02145 - N4315 E02115 -  
N4345 E02145 - N4330 E02215 - N4245 E02230 - N4230 E02145 FL250/370  
MOV ESE 20KT INTSF=
```

With an explicit forecast position:

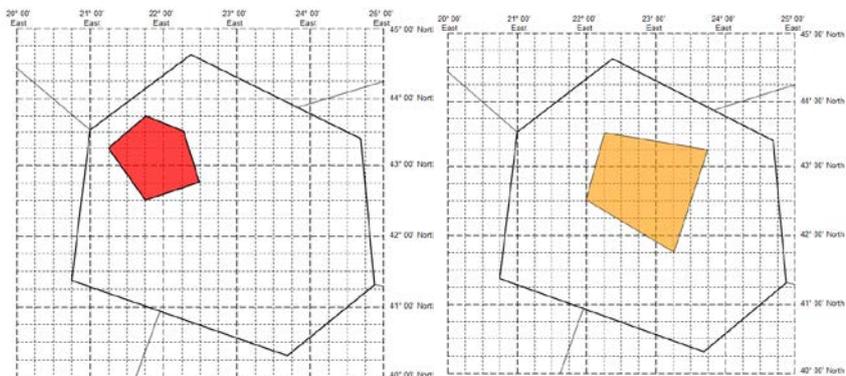


```
YUDD SIGMET 2 VALID 101200/101600 YUSO-  
YUDD SHANLON FIR/UIR SEV TURB FCST WI N4230 E02145 - N4315 E02115 -  
N4345 E02145 - N4330 E02215 - N4245 E02230 - N4230 E02145 FL250/370  
INTSF FCST AT 1600Z WI N4145 E02315 - N4230 E02200 - N4330 E02215 -  
N4315 E02345 - N4145 E02315=
```

When the SIGMET does not include a 'forecast position' section.

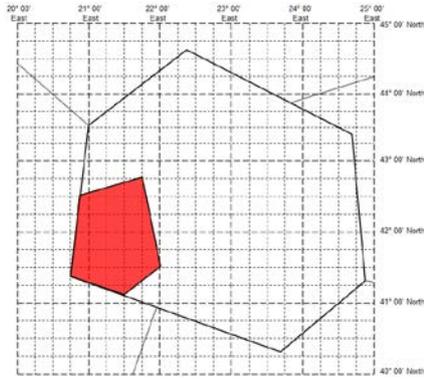

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR/UIR SEV TURB FCST WI N4230 E02052 - N4245 E02145 -
 N4130 E02200 - N4107 E02130 - N4123 E02045 - N4230 E02052 FL250/370
 MOV SE 30KT WKN=

With an explicit forecast position:

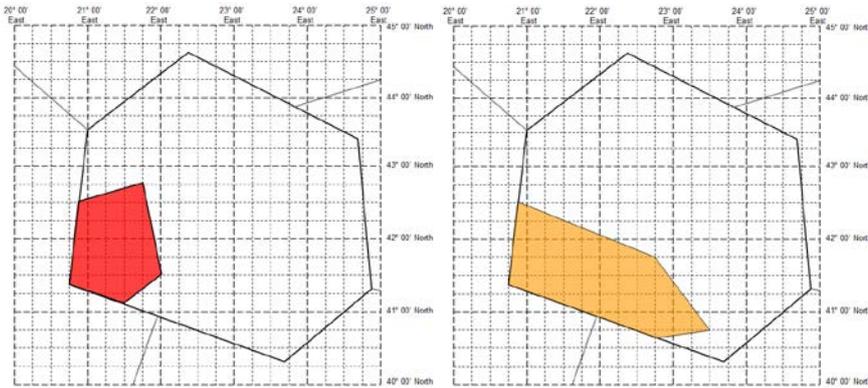

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR/UIR SEV TURB FCST WI N4230 E02052 - N4245 E02145 -
 N4130 E02200 - N4107 E02130 - N4123 E02045- N4230 E02052 FL250/370 WKN
 FCST AT 1600Z WI N4230 E02052 - N4145 E02245 - N4045 E02330 - N4040
 E02248 - N4123 E02045- N4230 E02052 =


Use of polygons with complex FIR boundaries.

Annex 3 (19th Edition, July 2016) specifies that the points of a polygon '... should be kept to a minimum and should not normally exceed seven'. However, some FIR boundaries are complex, and it would be unrealistic to expect that a polygon would be defined that followed such boundaries precisely. As such, some States have determined that the polygon points be chosen in relation to the complex boundary such that the FIR boundary approximates, but is wholly encompassed by, the polygon, and that any additional area beyond the FIR boundary be the minimum that can be reasonably and practically described.

Caution should however be exercised in those instances where international aerodromes are located in close proximity to such a complex FIR boundary.


In the examples below, it would not be practical to follow the northeastern boundary of the FIR exactly. The point close to N4330 E02245 is obviously a 'major' turning point along the FIR boundary, but the other, numerous and complex turning points can only be approximated when constrained to seven points.

When the SIGMET does not include a 'forecast position' section.

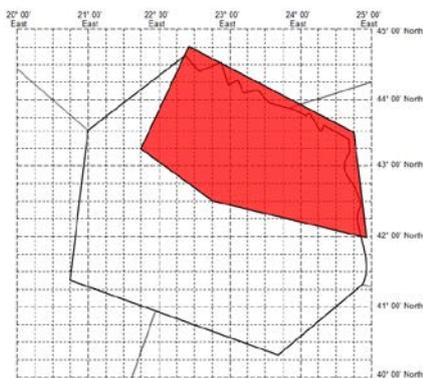

YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB FCST WI N4315 E02145 - N4445 E02245 -
N4330 E02445 - N4200 E02455 - N4230 E02245- N4315 E02145 FL250/370 MOV
SE 20KT WKN=

With an explicit forecast position:

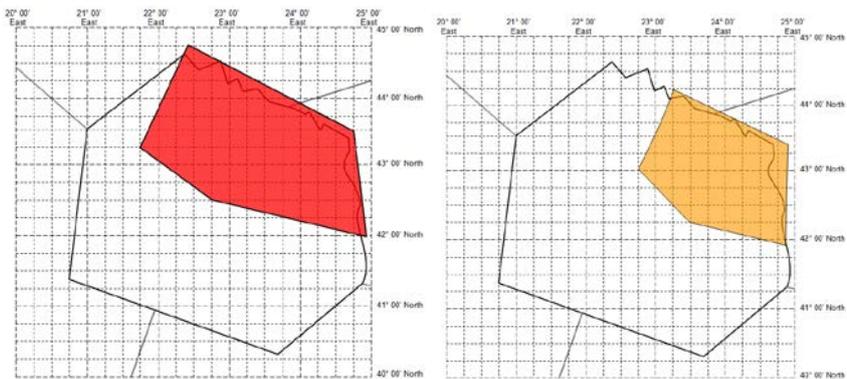


YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB FCST WI N4315 E02145 - N4445 E02245 -
N4330 E02445 - N4200 E02455 - N4230 E02245- N4315 E02145 FL250/370 WKN
FCST AT 1600Z WI N4300 E02245 - N4415 E02315 - N4322 E02452 - N4155
E02445 - N4215 E02330- N4300 E02245=

2a) In a sector of the FIR defined relative to a specified line, or single series of up to three connected lines, with start and end points on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at that point).


The specified points shall be on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at that point)

When the SIGMET does not include a 'forecast position' section.

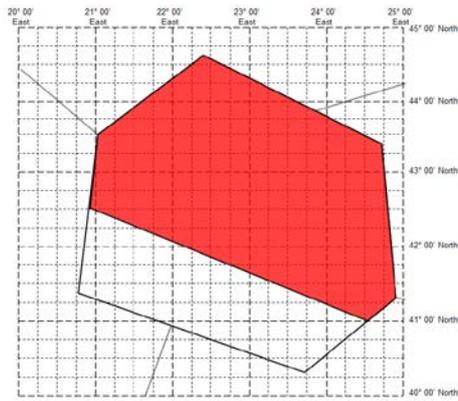


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4230 E02052 - N4100 E02430
 FL250/370 MOV NE 15KT WKN=

With an explicit forecast position:

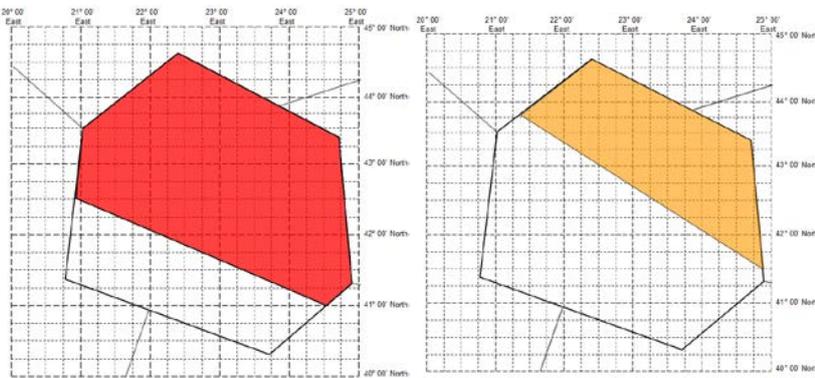


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4230 E02052 - N4100 E02430
 FL250/370 WKN FCST AT 1600Z NE OF LINE N4346 E02122 - N4130 E02452=

A separate example is provided below illustrating a case where the northeastern boundary is complex.

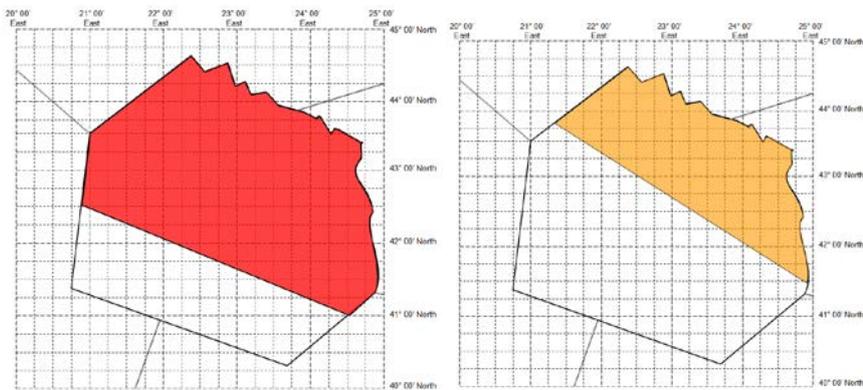


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4230 E02052 - N4100 E02430
 FL250/370 WKN FCST AT 1600Z NE OF LINE N4346 E02122 - N4130 E02457=

For a series of connected lines when the SIGMET does not include a 'forecast position' section.

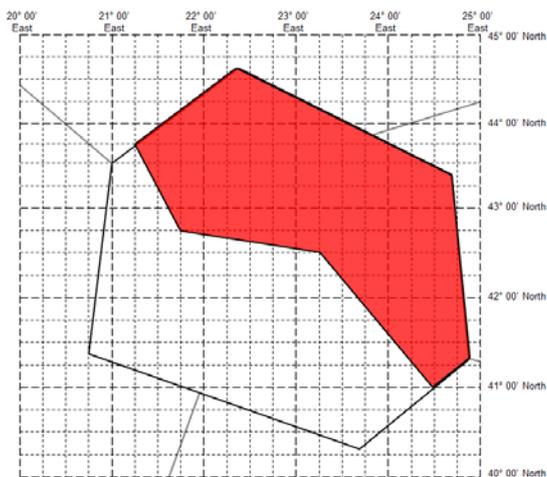

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4345 E02115 - N4245 E02145
 - N4230 E2315 - N4100 E2430 FL250/370 WKN MOV NE 20KT=

With an explicit forecast position:

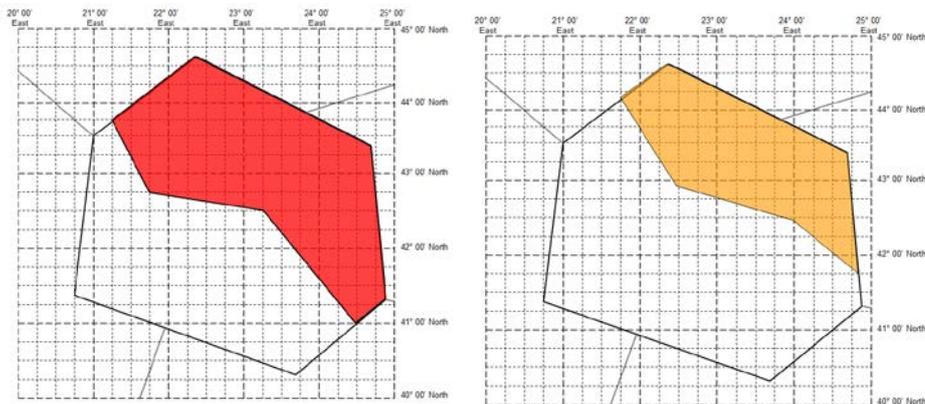


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4345 E02115 - N4245 E02145
 - N4230 E2315 - N4100 E2430 FL250/370 WKN FCST AT 1600Z NE OF LINE
 N4411 E02145 - N4255 E02228 - N4228 E2400 - N4130 E2450=

2b) In a sector of the FIR defined as being *between* two specified lines, or *between* two series of up to three connected lines, each with start and endpoints on the FIR boundary (or start and endpoints so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at those points).


The specified points shall be on the FIR boundary (or so close to the FIR boundary so as to leave no doubt that the intent is for the line to connect to the FIR boundary at that point)

When the SIGMET does not include a 'forecast position' section.

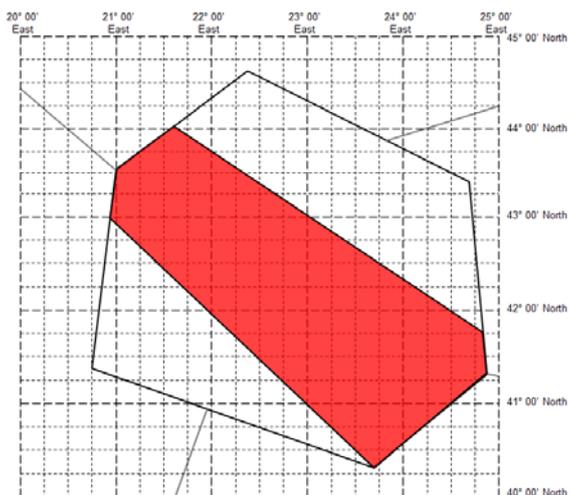


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4300 E02057 - N4020 E02340
 AND SW OF LINE N4402 E02142 - N4145 E02450 FL250/370 WKN MOV NE 20KT=

With an explicit forecast position:

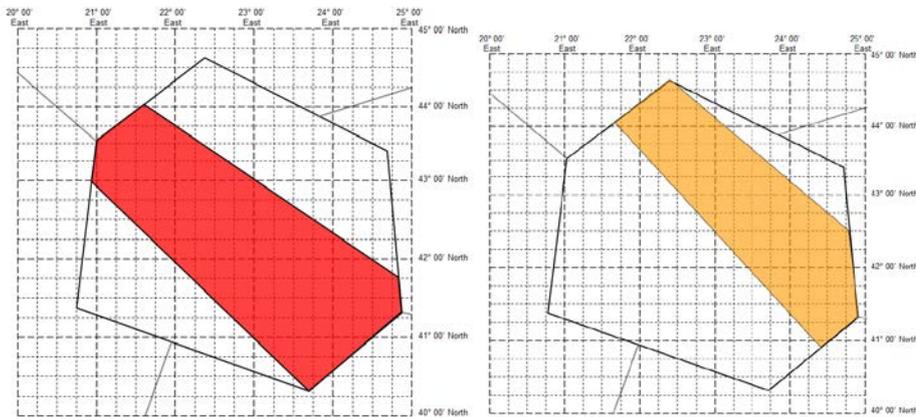


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4300 E02057 - N4020 E02340
 AND SW OF LINE N4402 E02142 - N4145 E02450 FL250/370 WKN FCST AT 1600Z
 NE OF LINE N4403 E02140 - N4055 E02422 AND SW OF LINE N4437 E02222 -
 N4230 E02447=

For a series of connected lines when the SIGMET does not include a 'forecast position' section.

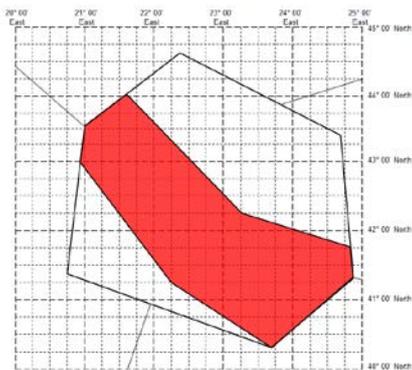

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4300 E02057 - N4115 E02215
 - N4020 E02340 AND SW OF LINE N4402 E02142 - N4215 E02315 - N4145
 E02450 FL250/370 WKN MOV NE 20KT=


With an explicit forecast position:

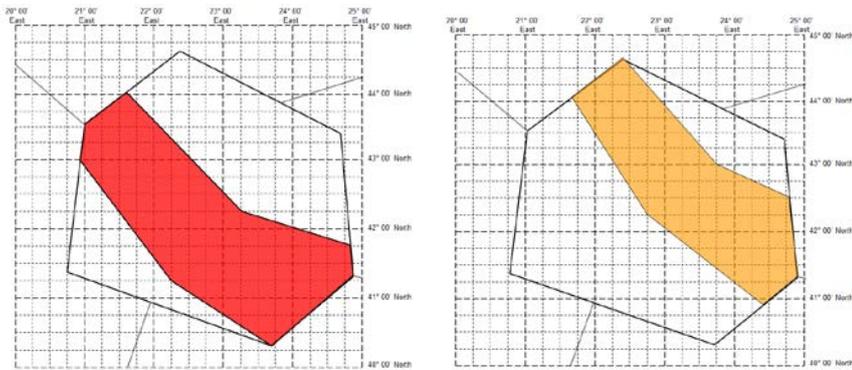

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR SEV TURB FCST NE OF LINE N4300 E02057 - N4115 E02215
 - N4020 E02340 AND SW OF LINE N4402 E02142 - N4215 E02315 - N4145
 E02450 FL250/370 WKN FCST AT 1600Z NE OF LINE N4403 E02140 N4215 E02245
 - N4055 E02422 AND SW OF LINE N4437 E02222 - N4300 E02345- N4230
 E02447=


2c) In a sector of the FIR defined relative to a line of latitude and a line of longitude (effectively a quadrant)

When the SIGMET does not include a 'forecast position' section.

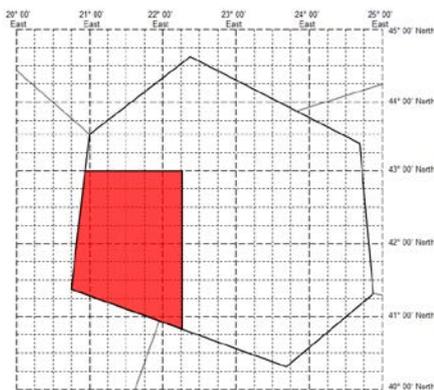

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR/UIR SEV TURB FCST S OF N4300 AND W OF E02215 FL250/370
 MOV S 12KT WKN=

When the SIGMET does include a 'forecast position'.

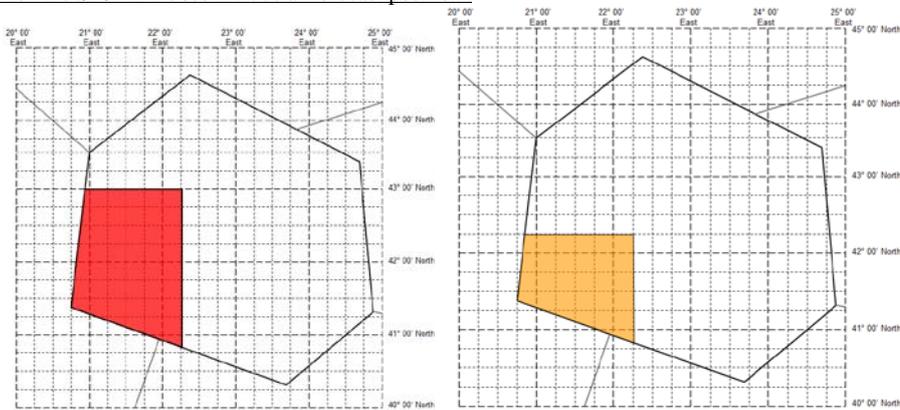


With an explicit forecast position:

YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB FCST S OF N4300 AND W OF E02215 FL250/370
WKN FCST AT 1600Z S OF N4215 AND W OF E02215=


2d) In a sector of the FIR defined relative to a line of latitude or longitude (effectively a segment)

When the SIGMET does not include a 'forecast position' section.

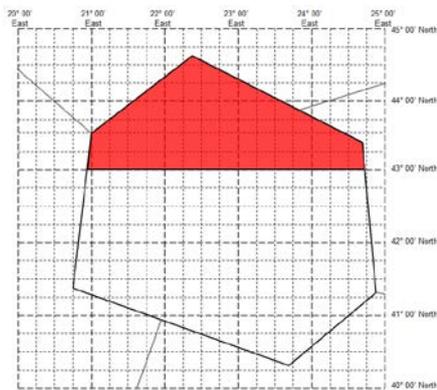


YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB FCST N OF N43 FL250/370 MOV N 15KT WKN=

When the SIGMET does include a 'forecast position' section.

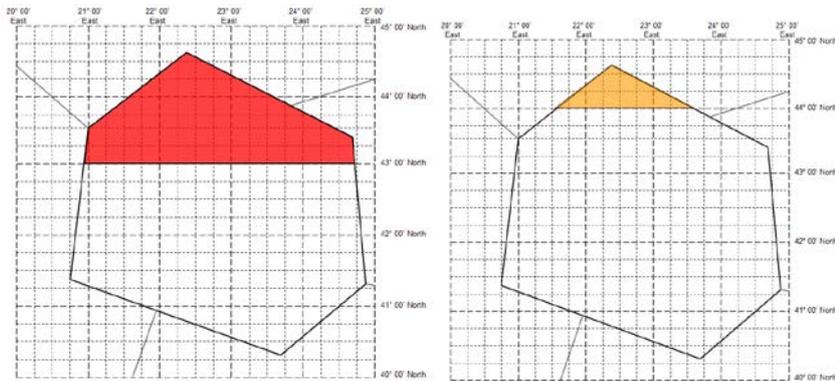

YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR/UIR SEV TURB FCST N OF N43³ FL250/370 WKN FCST AT
 1600Z N OF N44=

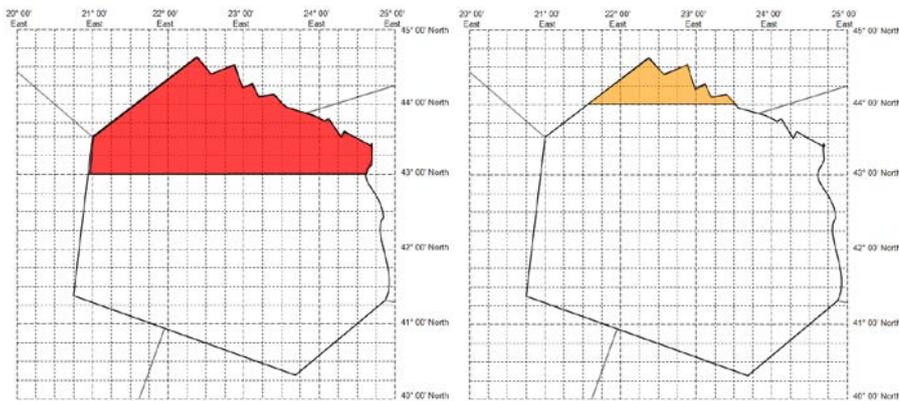


YUDD SIGMET 2 VALID 101200/101600 YUSO-
 YUDD SHANLON FIR/UIR SEV TURB FCST N OF N43⁴ FL250/370 WKN FCST AT
 1600Z N OF N44=

³ It would be equally valid to use 'N4300'.

⁴ It would be equally valid to use 'N4300'.

3) Defined by a 'corridor' of specified width, centred upon the line described;

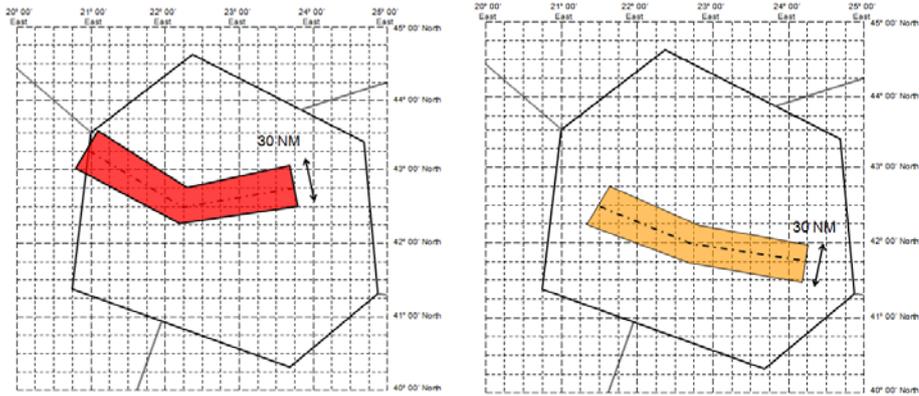


YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB FCST APRX 30NM WID LINE BTN N4315 E02100
- N4230 E02215 - N4245 E02345 FL250/370 WKN FCST AT 1600Z APRX 30NM
WID LINE BTN N4230 E02130 - N4200 E02245 - N4145 E02415=

Note: The nature of this option means that, as at N4315 E02100, it is inferred that there is some encroachment into the neighbouring FIR.


4) At a specific point within the FIR;

When the SIGMET does not include a 'forecast position' section.

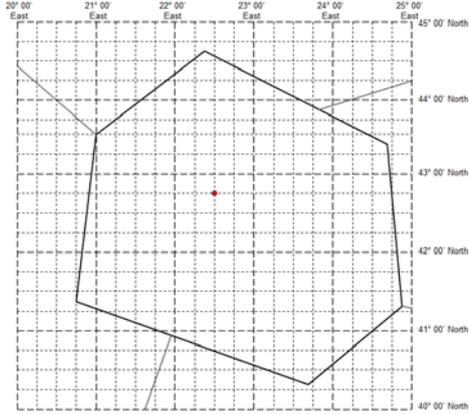

YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR/UIR SEV TURB OBS N4245 E02230 FL250/370 STNR WKN=


5) Covering entire FIR.

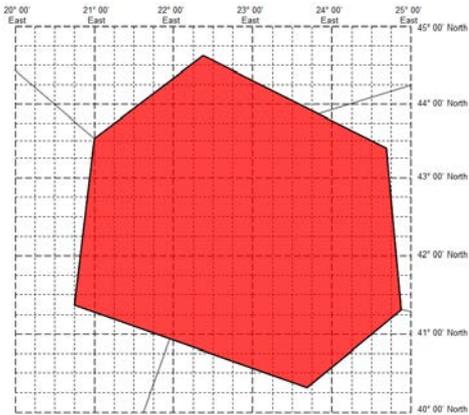

YUDD SIGMET 2 VALID 101200/101600 YUSO -
YUDD SHANLON FIR/UIR VA CLD FCST AT 1200Z ENTIRE FIR FL250/370 STNR
WKN=

6) Additional examples using volcanic ash references applicable to volcanic ash SIGMET only


When the VA SIGMET does not include a 'forecast position' section.

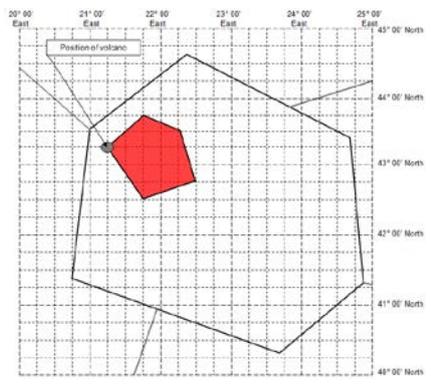

YUDD SIGMET 2 VALID 101200/101600 YUSO-
YUDD SHANLON FIR VA ERUPTION MT ASHVAL PSN N4315 E02115 VA CLD OBS AT
1200Z WI N4315 E02115 - N4345 E02145 - N4330 E02215 - N4245 E02230 -
N4230 E02145 - N4315 E02115 FL250/370 MOV ESE 20KT NC=


When the SIGMET does include a 'forecast position' section (no rate of movement).

For VA (eruption ceased, ash cloud persists downwind):

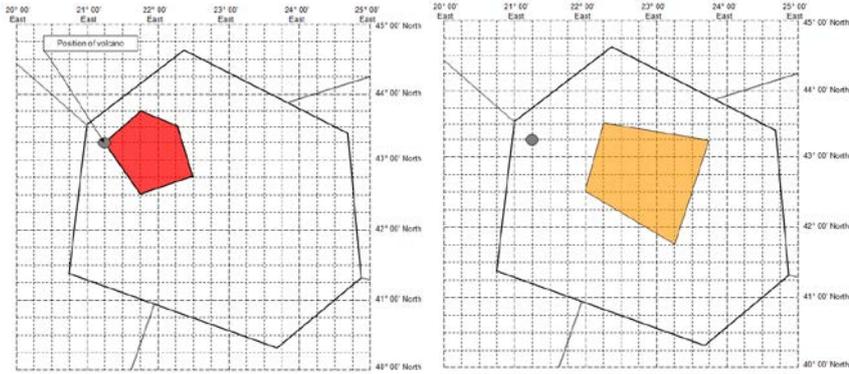


YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR/UIR VA ERUPTION MT ASHVAL PSN N4315 E02115 VA CLD OBS
 AT 1200Z WI N4315 E02115 - N4345 E02145 N4330 E02215 - N4245 E02230 -
 N4230 E02145 - N4315 E02115 FL250/370 NC FCST AT 1800Z WI N4330 E02215
 - N4315 E02345 - N4145 E02315 - N4230 E02200 - N4330 E02215=

For VA (eruption on-going):

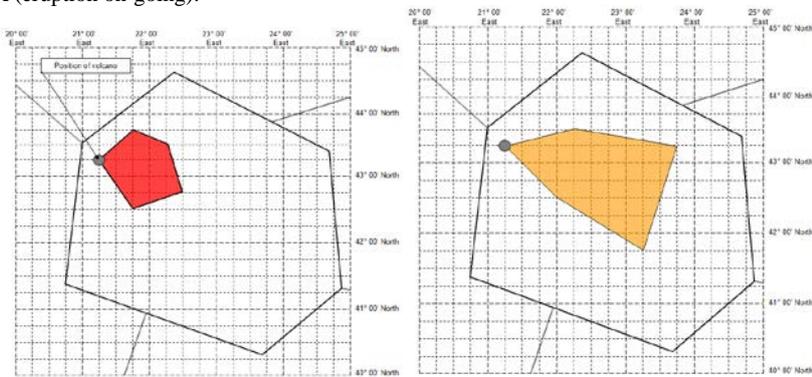


YUDD SIGMET 2 VALID 101200/101800 YUSO -
 YUDD SHANLON FIR VA ERUPTION MT ASHVAL PSN N4315 E02115 VA CLD OBS AT
 1200Z WI N4315 E02115 - N4345 E02145 - N4330 E02215 - N4245 E02230 -
 N4230 E02145 - N4315 E2115 FL250/370 NC FCST AT 1800Z WI N4315 E02115
 - N4330 E02215 - N4315 E02345 - N4145 E02315 - N4230 E02200 - N4315
 E02115=

For VA (eruption ceasing, ash dispersing):

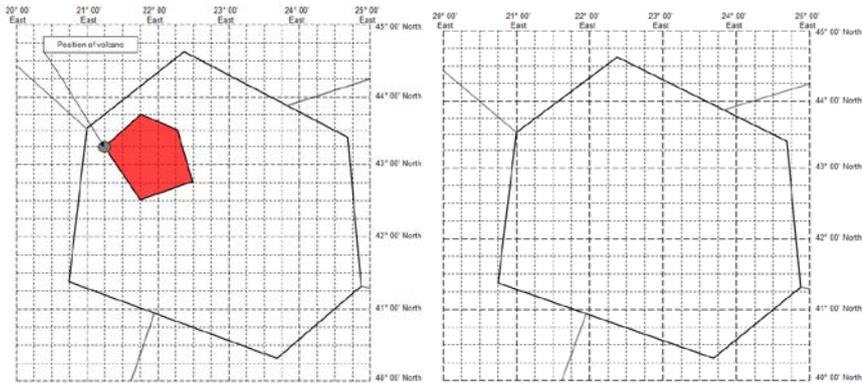

YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR VA ERUPTION MT ASHVAL PSN N4315 E02115 VA CLD OBS AT
 1200Z WI N4315 E02115 - N4345 E02145 - N4330 E02215 - N4245 E02230 -
 N4230 E02145 - N4315 E02115 FL250/370 WKN FCST AT 1800Z NO VA EXP=

For VA (eruption on-going), defining the area affected as a corridor of specified width:

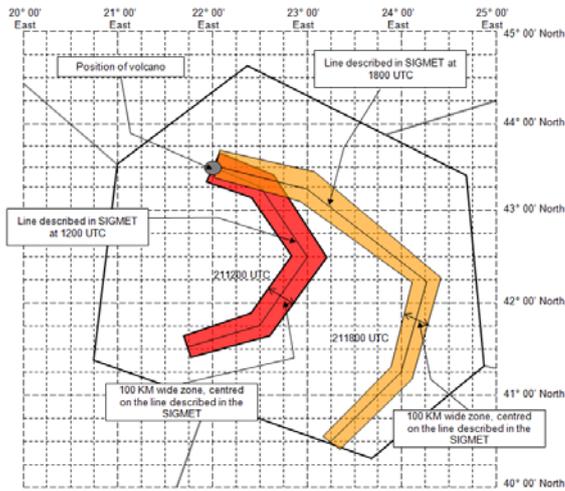


YUDD SIGMET 2 VALID 211200/211800 YUSO -
 YUDD SHANLON FIR/UIR VA ERUPTION MT ASHVAL PSN N4330 E02200 VA CLD
 FCST AT 1200Z APRX 100KM WID LINE BTN N4330 E02200 - N4315 E02230 -
 N4230 E02300 - N4145 E02230 - N4130 E02145 FL310/450 NC FCST AT 1800Z
 APRX 100KM WID LINE BTN N4330 E02200 - N4315 E02300 - N4215 E02415 -
 N4115 E02400 - N4030 E02315=

7) Additional examples using volcanic ash references applicable to multiple areas in SIGMET for volcanic ash.

The only way to include a second instance of a volcanic ash cloud in a SIGMET message is to use the 'AND' option after the 'Forecast position' section.


In the example below, two areas of volcanic ash cloud (at different levels) are forecast to move as described. The normal courier font refers to the northernmost areas of ash, and the italicised font refers to the southernmost areas of ash during the period. 'AND' is highlighted in **bold** to identify the separation of the two features.

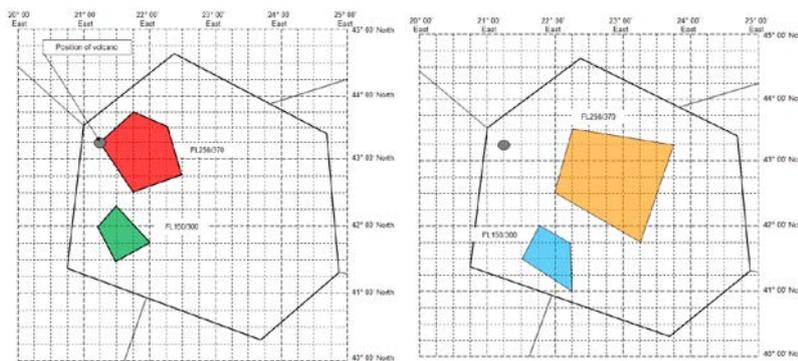

```
YUDD SIGMET 2 VALID 101200/101800 YUSO -
YUDD SHANLON FIR VA ERUPTION MT ASHVAL PSN N4315 E02115 VA CLD OBS AT
1200Z WI N4315 E02115 - N4345 E02145 N4330 E02215 - N4245 E02230 -
N4230 E02145 - N4315 E02115 FL250/370 NC FCST AT 1800Z WI N4330 E02215
- N4315 E02345 - N4145 E02315 - N4230 E02200 - N4330 E02215 AND N4200
E02115 - N4217 E02130 - N4145 E02200 - N4130 E02130 - N4200 E02100
FL150/300 NC FCST AT 1800Z WI N4200 E02145 - N4145 E02215 - N4100
E02215 - N4130 E02130 - N4200 E02145=
```

The above only works if there are two instances of ash at the start and end of the period. If the number of ash areas is different at the start and end, it is recommended that separate SIGMETs be issued as necessary.


8) Additional example using volcanic illustrating use of "WI nnnKM (or nnnNM) OF TC CENTRE " Tropical Cyclone SIGMET Only

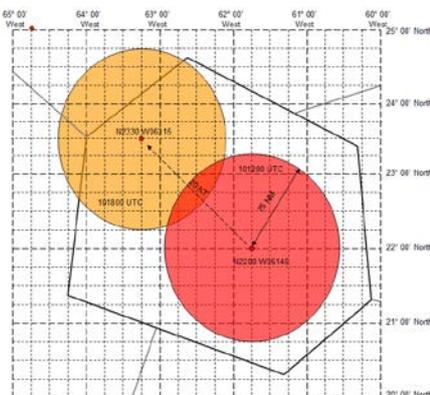

YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR TC GLORIA PSN N2200 W06145 CB OBS AT 1200Z WI 75NM OF
 TC CENTRE TOP BLW FL500 MOV NW 20KT WKN=

YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR TC GLORIA PSN N2200 W06145 CB OBS AT 1200Z WI 75NM OF
 TC CENTRE TOP BLW FL500 WKN FCST AT 1800Z TC CENTRE PSN N2330 W06315=

It is acceptable to use the other 'Location' options to describe the area affected by the CB of a Tropical Cyclone:

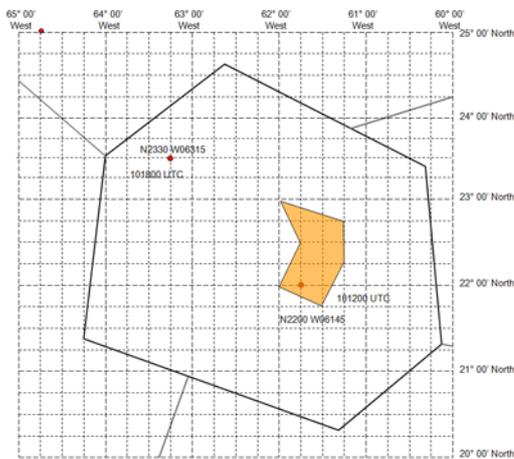


YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR TC GLORIA PSN N2200 W06145 CB OBS AT 1200Z WI N2200
 W06200 - N2230 W06215 - N2300 W06200 - N2245 W06245 - N2215 W06245 -
 N2145 W06230 -N2200 W06200 TOP BLW FL500 WKN FCST AT 1800Z TC CENTRE
 PSN N2330 W06315=

9) Additional example using volcanic ash references applicable to multiple areas in SIGMET for tropical cyclone.

The only way to include a second instance of a tropical cyclone in a SIGMET is to use the 'AND' option following the 'Forecast position' section.

The example below demonstrates how two separate TCs, and the CB within a specified radius of those TCs, can be described. The normal courier font refers to TC Gloria, and the italicised font refers to TC Harriet. 'AND' is highlighted in **bold** to identify the separation between information for the two features.

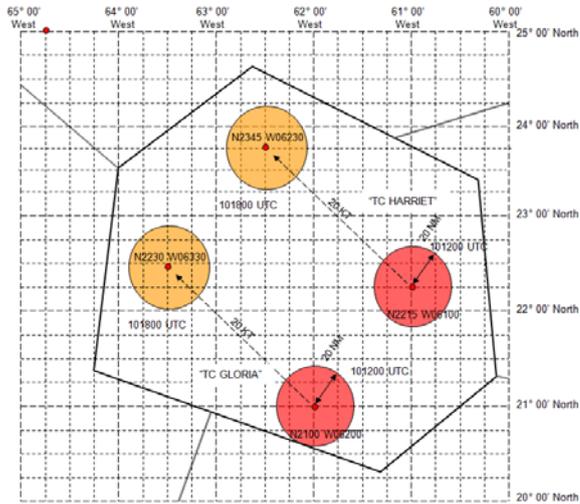

YUDD SIGMET 2 VALID 101200/101800 YUSO-
 YUDD SHANLON FIR TC GLORIA PSN N2100 W06200 CB OBS AT 1200Z WI 20NM OF
 TC CENTRE TOP FL500 MOV NW 20KT WKN FCST AT 1800Z TC CENTRE N2230
 W06330 **AND** TC HARRIET FCST AT 1200Z N2215 W06100 CB TOP FL400 WI 20NM
 OF CENTRE MOV NW 20KT WKN FCST AT 1800Z TC CENTRE N2345 W06230=

APPENDIX C

SIGMET TEST PROCEDURES

CHAPTER 1 — REGIONAL SIGMET TEST PROCEDURES

1. Introduction

1.1. The Meteorology Divisional Meeting (2002) formulated Recommendation 1/12 b), *Implementation of SIGMET requirements*, which called, *inter alia*, for the relevant planning and implementation regional groups (PIRGs) to conduct periodic tests of the issuance and reception of SIGMET messages, especially those for volcanic ash.

1.2. This document describes the procedures for conducting regional SIGMET tests. The test procedures encompass all the three types of SIGMET, as follows:

- SIGMET for volcanic ash (WV SIGMET);
- SIGMET for tropical cyclone (WC SIGMET); and
- SIGMET for other weather phenomena (WS SIGMET).

1.3. The requirements for dissemination of SIGMET are specified in Annex 3, Appendix 6, 1.2 and in this guide on pages 3-17 and 3-18.

1.4. Tropical cyclone and volcanic ash cloud SIGMETs will be referred to hereafter as **WC** SIGMET (due to the **T₁T₂** section of the WMO AHL being set to **WC**) and **WV** SIGMET (due to the **T₁T₂** section of the WMO AHL being set to **WV**) respectively. All other SIGMET types will be referred to by **WS** (due to the **T₁T₂** section of the WMO AHL being set to **WS**).

2. Purpose and scope of regional SIGMET tests

2.1. The purpose of the regional SIGMET tests is to check the awareness of participating MWOs of the ICAO requirements for the issuance of SIGMET and the compliance of the States' procedures for preparation and dissemination of SIGMET bulletins with the relevant ICAO Standards and Recommended Practices (SARPs) and regional procedures.

2.2. Note, an MWO is at liberty to issue SIGMET test messages for local reasons (i.e. testing of local systems/routing etc.). Whilst such tests may not involve other MWOs or agencies directly, it is recommended that the general principles of this guide be followed with regard to local, ad hoc testing.

2.3. Hereafter, references to 'SIGMET tests' or 'tests' should be understood to refer to regional SIGMET tests.

2.4. The scope of the tests is to check also the interaction (where appropriate, depending on regional requirements) between the tropical cyclone advisory centres (TCAC) and volcanic ash advisory centres (VAAC), and the MWOs in their areas of responsibility. Therefore, where the issuance of **WC** and **WV** SIGMET is being tested, the TEST SIGMET messages initiated by the MWO should normally be triggered by a test advisory issued by the respective TCAC or VAAC.

2.5. The regional OPMET data banks (RODB) will monitor the dissemination by filing all TEST SIGMETs and advisories and the corresponding reception times. The monitoring results for **WC**, **WV** and **WS** SIGMET will be provided in the form of summaries to the SIGMET test focal points given in section 3.4.1.3 with a copy to the Regional Office concerned

2.6. A consolidated summary report will be prepared by both the SIGMET test focal points and submitted to the ICAO regional office concerned. The report will include recommendations for improvement of the SIGMET exchange and availability. The results of the tests should be reported to the appropriate regional OPMET bulletin exchange/data management group and MET Sub-group meetings.

2.7. Participating States, for which discrepancies of the procedures or other findings are identified by the tests, will be advised by the ICAO Regional Office and requested to take necessary corrective action.

3. SIGMET test procedures

3.1. Procedures for WC and WV SIGMET tests

3.1.1. Participating units

3.1.1.1. **Tropical Cyclone Advisory Centres (TCAC):**
New Delhi

3.1.1.2. **Volcanic Ash Advisory Centres (VAAC):**
Toulouse

3.1.1.3. **Regional OPMET Data Banks (RODB):**
ROC Jeddah and back-up ROC Bahrain

3.1.1.4. **Meteorological Watch Offices (MWO):**
Reference MID eANP Volume II, Table MET II-1

3.1.1.5 **World Area Forecast Centres (WAFCs):**
London
Washington

3.1.2. WV/WC SIGMET test messages

3.1.2.1. On the specified date for the test <<Time (UTC) to be agreed appropriate to Region>> the participating VAAC and TCAC should issue a TEST VA or TC advisory. The structure of the TEST advisories should follow the standard format given in Annex 3 with indication that it is a test message as shown on page C-6.

3.1.2.2. MWOs, upon receipt of the TEST VA or TC advisory, should issue a TEST SIGMET for volcanic ash (**WV**) or tropical cyclone (**WC**), respectively, and send it to all participating RODBs. The WMO AHL, the first line of the SIGMET, and the FIR reference in the second line of the SIGMET should be valid entries. The remainder of the body of the message should contain only the specified text informing recipients in plain language that the message is a test. TEST SIGMETs should normally have short validity periods (10 minutes), but where appropriate TEST SIGMET may be issued with validity periods up to the maximum allowed (4 hours for **WS**, 6 hours for **WC** and **WV**).

3.1.2.3. If the MWO does not receive the TEST VA or TCA advisory within 30 minutes of the commencement time of the test then they should still issue a TEST SIGMET indicating that the VAA or TCA was not received. See C-7 for an example of the test message.

3.1.2.4. To avoid over-writing of a valid SIGMET, a TEST SIGMET for VA or TC should not be sent in the case where there is a valid SIGMET of the same type for the MWO's area of responsibility. However, in this case the responsible MWO should notify the WV/WC SIGMET test focal point as given in 3.4.1.3 so that they can be excluded from the analysis.

3.2. Procedures for WS SIGMET tests

Note. — The WS SIGMET is initiated by the MWO at the designated time in 3.2.2. It is not initiated by an advisory as in the WC and WV SIGMET tests.

3.2.1. Participating units

Each Regional Office should develop its own list of participating units, using the template below:

3.2.1.1. **Regional OPMET Data Banks (RODB):**
ROC Jeddah and back-up ROC Bahrain

3.2.1.2. **Meteorological Watch Offices (MWO):**
Reference MID eANP Volume II, Table MET II-1

3.2.2. WS SIGMET Test Message

3.2.2.1. The MWOs should issue a TEST SIGMET during the 10-minute period between <<Time (UTC) to be agreed appropriate to Region>>.

3.2.2.2. The WMO AHL, the first line of the SIGMET, and the FIR reference in the second line of the SIGMET should be valid. The remainder of the body of the message should contain only the specified text informing recipients in plain language that the message is a test. TEST SIGMETs should normally have short validity periods (10 minutes), but where appropriate TEST SIGMET may be issued with validity periods up to the maximum allowed (4 hours for **WS**, 6 hours for **WC** and **WV**).

3.3. Common procedures

3.3.1. Special procedure to avoid overwriting of a valid WV/WC/WS SIGMET

3.3.1.1. It is vital to ensure that TEST SIGMET is unique so that it is not confused with operational SIGMET and avoid overwriting a valid operational SIGMET in an automated system. In order to prevent this it is suggested that the test SIGMET sequence number should be Z99.

For example, a SIGMET test is scheduled for 0200 UTC on the 29th. The TEST SIGMET is issued as follows:

WSAU01 YBRF 290200
YBBB SIGMET Z99 VALID 290200/290210 YBRF-

YBBB BRISBANE FIR TEST SIGMET PLEASE DISREGARD=

3.3.2. The test date and time

3.3.2.1. ICAO Regional Office will set a date and time for each SIGMET test after consultation with the participating VAACs, TCACs and RODBs. The information about the agreed date and time will be sent to all States concerned by a State letter and copied to the States' SIGMET Tests Focal Points.

3.3.2.2. Tests for different types of SIGMET should preferably be conducted on separate dates.

3.3.2.3. SIGMET tests for **WC**, **WV** and **WS** should be conducted at least yearly.

3.3.3. Dissemination of test SIGMETs and advisories

3.3.3.1. All TEST TC/VA advisories should be sent by the TCACs and VAACs to the participating units, as specified in the Regional Air Navigation Plan. The relevant AFTN addresses should be identified as part of the Region specific documentation.

3.3.3.2. All TEST SIGMETs should be sent by the MWOs to the participating units, as specified in the Regional Air Navigation Plan identified by each Regional Office. The relevant AFTN addresses should be identified as part of the Region specific documentation.

3.3.3.3. RODBs that are nominated as IROGs will relay the test bulletins to their corresponding IROG.

3.3.3.4. SIGMET tests should be terminated within 2 hours of the test start time. Exceptionally, where the test requires SIGMETs to be valid for up to 4 hours, then tests may be extended to a maximum of 4 hours for WS SIGMET and 6 hours for WC and WV SIGMET.

3.3.4. Coordination with the ATS units

3.3.4.1. MWOs should inform the associated ATS units of the forthcoming SIGMET tests by a suitable advanced notice.

3.4. **Processing of the test messages and results**

3.4.1. The RODBs should file all incoming TEST advisories and SIGMETs and perform an analysis of the availability, timeliness of arrival and the correctness of the WMO bulletin headings. A SIGMET TEST Summary Table, as shown on pages C-8 and C-9 of this guide, should be prepared by each RODB and sent to the regional SIGMET test focal point given in section 3.4.3, with a copy to the ICAO Regional Office.

3.4.2. The SIGMET test focal points should prepare the final report of the test and present to the ICAO Regional Office. A summary report should be submitted to the next regional OPMET bulletin exchange/data management group and MET Sub-group meetings.

3.4.3. The current SIGMET test focal points for the MID Region are as follows:

MID Region

State	Contact	Numbers	e-mail
-------	---------	---------	--------

Bahrain	Anwar Yusuf Al-Mulla Operation Supervisor Meteorological Directorate Civil Aviation Affairs Ministry of Transportation P.O. Box 586	+973 17 321109 (tel) +973 17 320630 (fax)	aalmulla@caa.gov.bh
	Basim Salman Al Asfoor Head of Research and Information Meteorological Directorate Civil Aviation Affairs Ministry of Transportation P.O. Box 586	+973 17 329043 (tel) +973 17 320630 (fax)	balasfoor@caa.gov.bh
Egypt			
Iran, Islamic Republic of	Ahad Vazifeh Director of Forecasting Center in Meteorological Organization	+98 21 66070023(tel) +98 21 66070007(fax) +98 91 23851049 (mb)	vazife@gmail.com
Iraq	Sallam S. Nadhim Iraqi Meteorological Organization & Seismology Dept. : Weather Forecasting		Sallam_omery@yahoo.com (for backup use – info@meteoseism.gov.iq)
Jordan	Eng. Sahim AL-Shraideh		Sahim_Faisal@yahoo.com
Kuwait			
Lebanon			
Libya	Mr. Mokhtar R. ALGhaiaig Senior Forecaster National Meteorological Centre/Forecasting Department	+218-92-6009697 mob +218-215-621772 fax	alghaiag@yahoo.com
Oman			
Qatar			
Saudi Arabia			
Sudan			
Syrian Arab Republic			
United Arab Emirates	Ahmed Al Obeidli Sr. Air Navigation Inspector – CNS –AIRS General Civil Aviation Authority P.O. Box: 6558 Abu Dhabi United Arab Emirates	00971 240 54410 (tel)	aobaidli@gcaa.gov.ae
Yemen			

SIGMET TEST PROCEDURES

Format of TEST Advisories and SIGMETs

1. Format of TEST Volcanic Ash Advisory

VA ADVISORY
DTG: YYYMMDD/1000Z
VAAC: TOULOUSE
VOLCANO: TEST
PSN: UNKNOWN
AREA: TOULOUSE VAAC AREA
SUMMIT ELEV: UNKNOWN
ADVISORY NR: YYYY/nn
INFO SOURCE: NIL
AVIATION COLOUR CODE: NIL
ERUPTION DETAILS: NIL
OBS VA DTG: DD/GGggZ
OBS VA CLD: ASH NOT IDENTIFIABLE FROM SATELLITE DATA
FCST VA CLD +6 HR: DD/0800Z SFC/FL600 NO ASH EXP
FCST VA CLD +12 HR: DD/1400Z SFC/FL600 NO ASH EXP
FCST VA CLD +18 HR: DD/2000Z SFC/FL600 NO ASH EXP
RMK: THIS IS A TEST VA ADVISORY. MWO SHOULD NOW ISSUE A TEST SIGMET FOR VA, . PLEASE REFER TO THE LETTER FROM MID REGIONAL OFFICE DATED xxxxxxxxxxxx.
NXT ADVISORY: NO FURTHER ADVISORIES=

2. Format of TEST Tropical Cyclone Advisory

TC ADVISORY
DTG: YYYMMDD/0800Z
TCAC: NEW DELHI
TC: TEST
NR: nn (actual number)
PSN: NIL
MOV: NIL
C: NIL
MAX WIND: NIL
FCST PSN +06HR: NIL
FCST MAX WIND +06HR: NIL
FCST PSN +12HR: NIL
FCST MAX WIND +12HR: NIL
FCST PSN +18HR: NIL
FCST MAX WIND +18HR: NIL
FCST PSN +24HR: NIL
FCST MAX WIND +24HR: NIL
RMK: THIS IS A TEST TC ADVISORY. MWO SHOULD NOW ISSUE A TEST SIGMET FOR TC. PLEASE REFER TO THE LETTER FROM MID REGIONAL OFFICE DATED xxxxxxxxxxxx.
NXT MSG: NIL=

Formatted: French (France)

3. Format of TEST SIGMET for Volcanic Ash

```
WVXXii CCCC YYGGgg  
CCCC SIGMET Z99 VALID YYGGgg/YYGGgg CCCC-  
CCCC <<NAME>> FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST VA ADVISORY NUMBER xx RECEIVED FM TOULOUSE VAAC AT YYGGggZ=
```

or

```
WVXXii CCCC YYGGgg  
CCCC SIGMET Z99 VALID YYGGgg/YYGGgg CCCC-  
CCCC <<NAME>> FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST VA ADVISORY NOT RECEIVED FM TOULOUSE VAAC=
```

Example:

```
WVJP31 RJTD 170205  
RJJJ SIGMET Z99 VALID 170205/170215 RJTD-  
RJJJ FUKUOKA FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST VA ADVISORY NUMBER 1 RECEIVED FM TOKYO VAAC AT 170200Z=
```

```
WVJP31 RJTD 170235  
RJJJ SIGMET Z99 VALID 170205/170215 RJTD-  
RJJJ FUKUOKA FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST VA ADVISORY NOT RECEIVED FM TOKYO VAAC=
```

4. Format of TEST SIGMET for Tropical Cyclone

```
WCXXii CCCC YYGGgg  
CCCC SIGMET Z99 VALID YYGGgg/YYGGgg CCCC-  
CCCC <<NAME>> FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST TC ADVISORY NUMBER xx RECEIVED FM NEW DELHI TCAC AT YYGGggZ=
```

```
WCXXii CCCC YYGGgg  
CCCC SIGMET Z99 VALID YYGGgg/YYGGgg CCCC-  
CCCC <<NAME>> FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST TC ADVISORY NOT RECEIVED FM NEW DELHI TCAC=
```

Example:

```
WCJP31 RJTD 100205  
RJJJ SIGMET Z99 VALID 100205/100215 RJTD-  
RJJJ FUKUOKA FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.  
TEST TC ADVISORY NUMBER 1 RECEIVER FM TOKYO TCAC AT 180200Z=
```

```
WCJP31 RJTD 100235
```

RJJJ SIGMET Z99 VALID 100205/100215 RJTD-
RJJJ FUKUOKA FIR THIS IS A TEST SIGMET, PLEASE DISREGARD.
TEST TC ADVISORY NOT RECEIVED **FM TOKYO TCAC** =

5. Format of TEST SIGMET for other weather phenomena

WSXXii CCCC YYGGgg
CCCC SIGMET Z99 VALID YYGGgg/YYGGgg CCCC-
CCCC <<NAME>> FIR THIS IS A TEST SIGMET, PLEASE DISREGARD=

Example:

WSJP31 RJTD 240205
RJJJ SIGMET Z99 VALID 240205/240215 RJTD-
RJJJ FUKUOKA FIR THIS IS A TEST SIGMET, PLEASE DISREGARD=

CHAPTER 2 — SAMPLE TABLE TO USED BY REGIONAL OPMET DATA BANKS

Name of RODB Tokyo
Date of Test 2011/11/17
Target (VA or TC) VA

VA Advisories (FV)

<i>TTAAii</i>	<i>CCCC</i>	<i>YYGGgg</i>	<i>Received Time(UTC)</i>	<i>Comments/Remarks</i>
FVAK23	PAWU	170159	01:59:29	
FVAU01	ADRM	170201	02:01:53	
FVFE01	RJTD	170200	02:00:09	
FVPS01	NZKL	170207	02:08:27	
FVXX02	LFPW	170202	02:02:41	
FVXX25	KNES	170200	02:02:01	

VA SIGMET (WV)

<i>TTAAii</i>	<i>CCCC</i>	<i>YYGGgg</i>	<i>MWO</i>	<i>FIR</i>	<i>Received Time(UTC)</i>	<i>Comments/Remarks</i>
WVAK01	PAWU	170200	PAWU	PAZA	02:00:11	
WVAU01	ADRM	170201	YDRM	YBBB	02:02:04	
WVCI31	RCTP	170205	RCTP	RCAA	02:04:58	
WVCI33	ZBAA	170205	ZBAA	ZBPE	02:05:26	
WVCI34	ZSSS	170205	ZSSS	ZSHA	02:02:34	
WVCI35	ZJHK	170201	ZJHK	ZJSA	02:03:34	
WVCI36	ZUUU	170205	ZUUU	ZPKM	02:11:04	
WVCI37	ZLXY	170205	ZLXY	ZLHW	02:07:44	
WVCI38	ZYTX	170205	ZYTX	ZYSH	02:01:50	
WVCI39	ZWWW	170202	ZWWW	ZWUQ	02:02:40	
WVCI45	ZHHH	170204	ZHHH	ZHWH	02:08:52	
WVFI01	NFFN	170000	NFFN	NFFF	02:15:46	
WVIN31	VOMM	170201	VOMM	VOMF	02:09:57	
WVJP31	RJTD	170205	RJTD	RJJJ	02:06:24	

WVKP31	ZUUU	170206	ZUUU	VDPP	02:12:23
WVLA31	VLVT	170200	VLVT	VLVT	02:01:03
WVMS31	WMKK	170205	WMKK	WBFC	02:04:28
WVPA01	PHFO	170201	PHFO	KZAK	02:02:09
WVPH31	RPLL	170210	RPLL	RPHI	02:08:43
WVPN01	KKCI	170200	KKCI	KZAK	02:00:11
WVRA31	RUCH	170205	RUCH	UIAA	02:08:01
WVRA31	RUHB	170206	RUHB	UHHH	02:07:57
WVRA31	RUMG	170205	RUMG	UHMM	02:08:59
WVRA31	RUPV	170200	RUPV	UHMP	02:09:13
WVRA31	RUSH	170205	RUSH	UHSS	02:04:22
WVRA31	RUVV	170202	RUVV	UHWV	02:03:13
WVRA32	RUPV	170200	RUPV	UHMA	02:06:01
WVRA32	RUYK	170207	RUYK	UELL	02:07:28
WVRA33	RUHB	170202	RUHB	UHBB	02:02:49
WVSR20	WSSS	170205	WSSS	WSJC	02:05:38
WVSS20	VHHH	170202	VHHH	VHVK	02:03:05
WVTH31	VTBS	170211	VTBS	VTBB	02:13:53
WVVS31	VVGL	170200	VVGL	VVNB	02:05:06
WVVS31	VVGL	170208	VVGL	VVTS	02:14:38

— END —

APPENDIX D

SIGMET WMO HEADERS - MID

State	MWO name (Doc 7910)	MWO Loc. Ind.	WS AHL <u>LS AHL</u>	WV AHL <u>LV AHL</u>	WC AHL <u>LY AHL</u>	FIR Name (Doc 7910)	FIR Loc. Ind.	ATSU serving the FIR
BAHRAIN	BAHRAIN INTERNATIONAL	OBBI	WSBN31 OBBI <u>LSBN31</u> <u>OBBI</u>	WVBN31 OBBI <u>LVBN31</u> <u>OBBI</u>	WCBN31 OBBI <u>LYBN31</u> <u>OBBI</u>	BAHRAIN	OBBB	OBBB
EGYPT	CAIRO/INTL	HECA	WSEG31 HECA <u>LSEG31</u> <u>HECA</u>	WVEG31 HECA <u>LVEG31</u> <u>HECA</u>	N/A	CAIRO	HECC	HECC
IRAN	TEHRAN/MEHRABAD INTL	OIII	WSIR31 OIII <u>LSIR31</u> <u>OIII</u>	WVIR31 OIII <u>LVIR31</u> <u>OIII</u>	WCIR31 OIII <u>LYIR31</u> <u>OIII</u>	TEHRAN	OIIX	OIIX
IRAQ	BAGHDAD INTERNATIONAL AIRPORT	ORBI	<u>WSIQ31</u> <u>ORBI</u> <u>LSIQ31</u> <u>ORBI</u>	<u>WVIQ31</u> <u>ORBI</u> <u>LVIQ31</u> <u>ORBI</u>	N/A	BAGHDAD	ORBB	ORBS
JORDAN	AMMAN/QUEEN ALIA	OJAI	WSJD01 OJAM <u>LSJD01</u> <u>OJAM</u>	WVJD01 OJAM <u>LVJD01</u> <u>OJAM</u>	N/A	AMMAN	OJAC	OJAC
KUWAIT	KUWAIT/INTL AIRPORT	OKBK	WSKW10 OKBK <u>LSKW10</u> <u>OKBK</u>	-WVKW10 OKBK <u>LVKW10</u> <u>OKBK</u>	-WCKW10 OKBK <u>LYKW10</u> <u>OKBK</u>	KUWAIT	OKAC	OKAC
LEBANON	BEIRUT/BEIRUT INTL	OLBA	<u>WSLB31</u> <u>OLBA</u> <u>LSLB31</u> <u>OLBA</u>	<u>WVLB31</u> <u>OLBA</u> <u>LVLB31</u> <u>OLBA</u>	N/A	BEIRUT	OLBB	OLBA
LYBIA	Libya MWO	HLMC*	WSLY31 HLMC <u>LSLY31</u> <u>HLMC</u>	WVLY31 HLMC <u>LVLY31</u> <u>HLMC</u>	N/A	TRIPOLI	HLMC	HLMC
OMAN	MUSCAT/MUSCAT INTL	OOMS	WSOM31 OOMS <u>LSOM31</u> <u>OOMS</u>	WVOM31 OOMS <u>LVOM31</u> <u>OOMS</u>	WCOM31 OOMS <u>LYOM31</u> <u>OOMS</u>	MUSCAT	OOMM	OOMM
<u>QATAR</u>	<u>HAMAD</u> <u>INTERNATIONAL,</u> <u>QATAR</u>	<u>OTHH</u>	<u>WSQT21</u> <u>OTHH</u> <u>LSQT21</u> <u>OTHH</u>	<u>WVQT21</u> <u>OTHH</u> <u>LVQT21</u> <u>OTHH</u>	<u>WCQT21</u> <u>OTHH</u> <u>LYQT21</u> <u>OTHH</u>	<u>DOHA</u>	<u>OTDF</u>	<u>OTDF</u>
SAUDI ARABIA	JEDDAH/KING ABDULAZIZ INTL	OEJN	WSSD20 OEJD <u>LSSD20</u> <u>OEJD</u>	WVSD20 OEJD <u>LVSD20</u> <u>OEJD</u>	WCSD20 OEJD <u>LYSD20</u> <u>OEJD</u>	JEDDAH	OEJD	OEJD

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

State	MWO name (Doc 7910)	MWO Loc. Ind.	WS AHL <u>LS AHL</u>	WV AHL <u>LV AHL</u>	WC AHL <u>LY AHL</u>	FIR Name (Doc 7910)	FIR Loc. Ind.	ATSU serving the FIR
SUDAN	KHARTOUM	HSSS	WSSU31 -HSSS <u>LSSU31</u> HSSS	WVSU31 HSSS <u>LVSU31</u> HSSS	N/A	KHARTOUM	HSSS	HSSS
SYRIA	DAMASCUS / INTL	OSDI	<u>WSSY31</u> <u>OSDI</u> <u>LSSY31</u> <u>OSDI</u>	<u>WVSY31</u> <u>OSDI</u> <u>LVSY31</u> <u>OSDI</u>	N/A	DAMASCUS	OSTT	OSDI
UNITED ARAB EMIRATES	ABU DHABI INTERNATIONAL	OMAA	WSER31 OMAA <u>LSER31</u> OMAA	WVER31 OMAA <u>LVER31</u> OMAA	WCER31 OMAA <u>LYER31</u> OMAA	EMIRATES	OMAE	OMAE
YEMEN	SANAA / INTL	OYSN	WSYE31 OYSN <u>LSYE31</u> OYSN	WVYE31 OYSN <u>LVEY31</u> OYSN	WCYE31 OYSN <u>LYYE31</u> OYSN	SANAA	OYSC	OYSN

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

a) Note 1: Qatar is not indicated in the above table, since it has no FIR area if responsibility.

Formatted: Indent: Before: 0.98", No bullets or numbering, Tab stops: Not at 0.98"

b) Note 2: The AHL for each of the WS, WV and WC SIGMETs (highlighted above) is to be confirmed by the relevant State.

Formatted: Highlight

Formatted: Indent: Before: 0.69", No bullets or numbering, Tab stops: Not at 0.98"

*not defined in ICAO Doc 7910

APPENDIX E

SPECIAL AIR-REPORT WMO HEADERS - MID

Under Construction – yellow highlight not confirmed

State	Special Air-Report	Special Air-Report on Volcanic Ash
Bahrain	UABN61 OBBI	UABN71 OBBI
Egypt	UAEG61 HECA	UAEG71 HECA
Iran, Islamic Republic of	UAIR61 OIII	UAIR71 OIII
Iraq	UAIQ61 ORBI	UAIQ71 ORBI
Jordan	UAJD61 OJAM	UAJD71 OJAM
Kuwait	UAKW61 OKBK	UAKW71 OKBK
Lebanon	UALB61 OLBA	UALB71 OLBA
Libya	UALY61 HLMC	UALY71 HLMC
Oman	UAOM61 OOMS	UAOM71 OOMS
<u>Qatar</u>	<u>UAQT61 OTHH</u>	<u>UAQT71 OTHH</u>
Saudi Arabia	UASD61 OEJD	UASD71 OEJD
Sudan	UASU61 HSSS	UASU71 HSSS
Syrian Arab Republic	UASY61 OSDI	UASY71 OSDI
United Arab Emirates	UAER61 OMAA	UAER71 OMAA
Yemen	UAYE61 OYSN	UAYE71 OYSN

a) Note 1: Qatar is not indicated in the above table, since it has no FIR area of responsibility.

APPENDIX F

SIGMET EXAMPLES - MID

ISOL EMBD TS

WSKW31 OKBK 030900
OKBK SIGMET 1 VALID 030900/031300 OKBK-
OKAC KUWAIT FIR EMBD TS OBS AT 0850Z N OF N30 TOP FL3000 MOV E 15KT NC=

CANCELLATION SIGMET

WSKW31 OKBK 031030
OKBK SIGMET 2 VALID 031030/031300 OKBK-
OKAC KUWAIT FIR CNL SIGMET 1 030900/031300 NC=

SEV TURB

WSKW31 OKBK 030800
OKBK SIGMET 1 VALID 030900/031300 OKBK-
OKAC KUWAIT FIR SEV TURB FCST AT 0850Z N OF N30 FL300/340 MOV E 15KT NC=

HVY DS

WSKW31 OKBK 030900
OKBK SIGMET 1 VALID 030900/031300 OKBK-
OKAC KUWAIT FIR HVY DS OBS AT 0850Z N OF N30 MOV SE 30KT NC=

CANCELLATION SIGMET

WSKW31 OKBK 031030
OKBK SIGMET 2 VALID 031030/031300 OKBK-
OKAC KUWAIT FIR CNL SIGMET 1 030900/031300 NC=

HVY SS

WSKW31 OKBK 030800
OKBK SIGMET 1 VALID 030900/031300 OKBK-
OKAC KUWAIT FIR HVY SS FCST AT 0900Z N OF N30 MOV SE 30KT NC=

CANCELLATION SIGMET

WSKW31 OKBK 031030
OKBK SIGMET 2 VALID 031030/031300 OKBK-
OKAC KUWAIT FIR CNL SIGMET 1 030900/031300 NC=

- END -